

RF Test Report

For

Purism SPC

Test Standards:	<u>Part 15C Subpart C §15.247</u>
Product Description:	<u>Librem Mini</u>
Tested Model:	<u>LMv1-01</u>
FCC ID:	2AT9R-LMV1-01
Classification	<u>(DTS) Digital Transmission System</u>
Report No.:	<u>EC2005029RF01</u>
Tested Date:	<u>2020-05-29 to 2020-06-15</u>
Issued Date:	<u>2020-06-15</u>
Prepared By:	<u>Jerry Wang</u> Jerry Wang / Engineer
Approved By:	<u>Bacon Wu</u> Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of

Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2020.06.15	Valid	Original Report

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	7
2.5	Applicable Standards	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	9
3.3	Support Equipment	10
3.4	Test Setup	10
3.5	Measurement Results Explanation Example	12
4	TEST RESULT	13
4.1	DTS and Occupied Channel Bandwidth Measurement	13
4.2	Maximum Conducted Output Power Measurement	14
4.3	Maximum Power Spectral Density Measurement	15
4.4	Band Edges and Spurious Emission Measurement	16
4.5	Radiated Band Edges and Spurious Emission Measurement	17
4.6	AC Conducted Emission Measurement	126
4.7	Antenna Requirements	129
5	LIST OF MEASURING EQUIPMENT	130
6	UNCERTAINTY OF EVALUATION.....	132
	Appendix A: DTS Bandwidth.....	133
	Appendix B: Occupied Channel Bandwidth	140
	Appendix C: Maximum conducted output power	147
	Appendix D: Duty Cycle.....	154
	Appendix E: Maximum power spectral density.....	161
	Appendix F: Band edge measurements	168
	Appendix G: Conducted Spurious Emission	173
	Appendix H: Setup Photographs	193

Summary Of Test Result

FCC Rule	Description	Limit	Result	Remark
15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	99% Bandwidth	-	Pass	-
15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.42 dB at 2483.5 MHz
15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.24 dB at 7.566 MHz
15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012, ISED# :24347)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code : 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

Purism SPC

1 Market Street, 36th Floor, San Francisco, CA94105, United States

2.2 Manufacturer

Purism, SPC

One Market Street, 36th Floor, San Francisco, CA 94105, USA

2.3 General Description Of EUT

Product	Librem Mini
Model No.	LMV1-01
Additional NO.	N/A
Difference Description	N/A
FCC ID	2AT9R-LMV1-01
Power Supply	120Vac for adapter
Modulation Technology	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Type	802.11b : DSSS 802.11g/n : OFDM
Operating Frequency	2412-2462MHz
Number Of Channel	11
Max. Output Power	802.11b : 14.48 dBm (0.0281 W) 802.11g : 14.32 dBm (0.0270 W) 802.11n HT20 : 14.16 dBm (0.0261 W) 802.11n HT40 : 14.03 dBm (0.0253 W)
Antenna Type	FPC Antenna with 3dBi gain
HW Version	N/A
SW Version	N/A
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3. The EUT was powered by the following adapters:

MODEL:	ADS-40SI-19-3 19040E
INPUT:	100-240V~50/60Hz 1.0A MAX
OUTPUT:	19V DC 2.1A
DC LINE:	2.5 m

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013
- IC RSS-247 Issue 2
- IC RSS-Gen Issue 5
- KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n(HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
		7	2442 MHz
		8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz		
5	2432 MHz		
6	2437 MHz		

The transmitter has a maximum peak conducted output power as follows:

Frequency Range(MHz)	Mode	Rate	Output Power(dBm)
2412~2462	802.11b	1Mbps	14.48
2412~2462	802.11g	6Mbps	14.32
2412~2462	802.11n HT20	MCS0	14.16
2422~2452	802.11n HT40	MCS0	14.03

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases				
Test Item	Modulation			
	802.11 b	802.11 g	802.11n HT20	802.11n HT40
Conducted Test Cases	Mode 1: CH01	Mode 4: CH01	Mode 7: CH01	Mode 10: CH03
	Mode 2: CH06	Mode 5: CH06	Mode 8: CH06	Mode 11: CH06
	Mode 3: CH011	Mode 6: CH011	Mode 9: CH011	Mode 12: CH09

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	802.11 b
	Mode 1: CH01

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3.2.3 Radiated Emission Test (Above 1GHz)

Test Item	Modulation			
	802.11 b	802.11 g	802.11n HT20	802.11n HT40
Radiated Test Cases	Mode 1: CH01	Mode 4: CH01	Mode 7: CH01	Mode 10: CH03
	Mode 2: CH06	Mode 5: CH06	Mode 8: CH06	Mode 11: CH06
	Mode 3: CH011	Mode 6: CH011	Mode 9: CH011	Mode 12: CH09

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : 2.4G WLAN Link + HDMI + Earphone + Burnin test + ping
-----------------------	--

3.3 Support Equipment


Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m
3.	Flat Panel Monitor	Dell	P2317H	FCC DoC	N/A	Unshielded, 1.5 m

3.4 Test Setup


The EUT is continuously communicating to the WIFI tester during the tests.

EUT was set in the Hidden menu mode to enable WIFI communications.


Setup diagram for Conducted Test

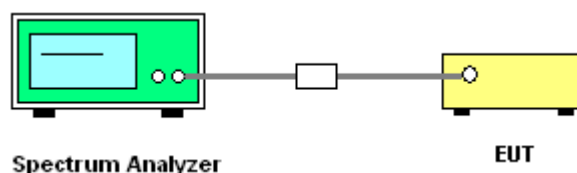


Setup diagram for Raidation(9KHz~30MHz) Test

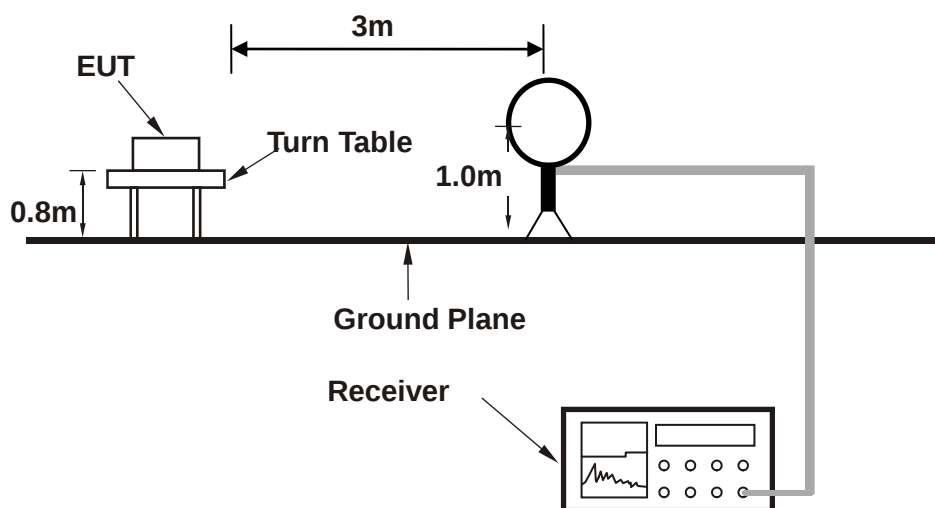


Setup diagram for Raidation(Below 1G) Test

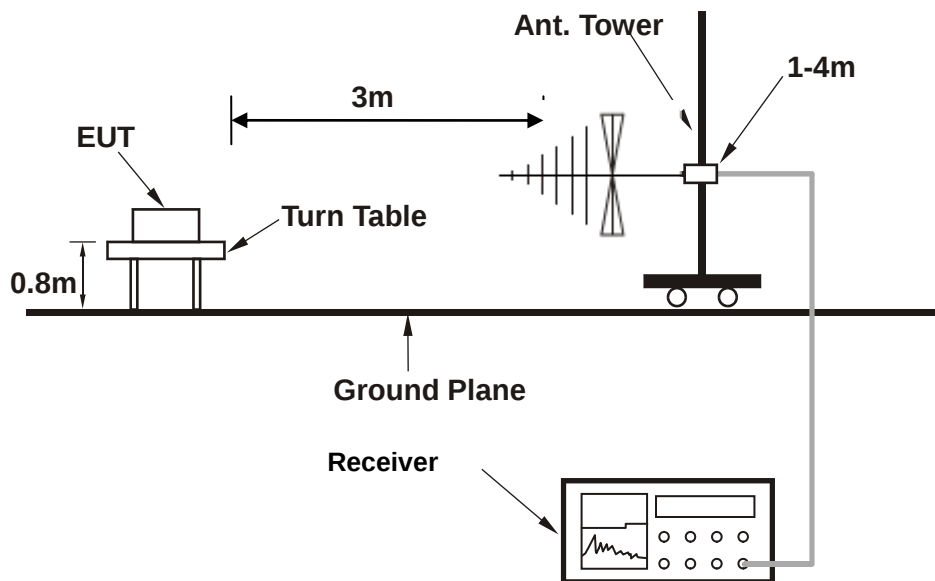

Setup diagram for Raidation(Above1G) Test

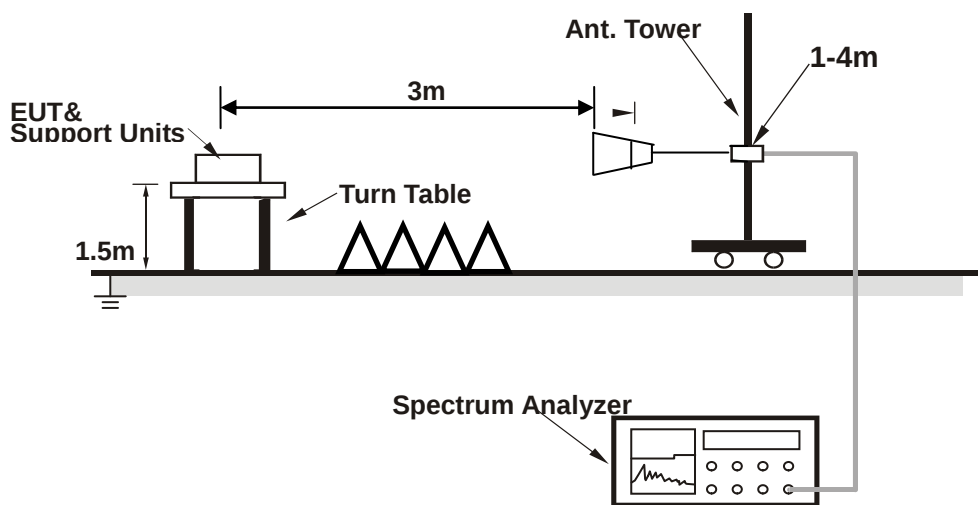

Setup diagram for AC Conducted Emission Test

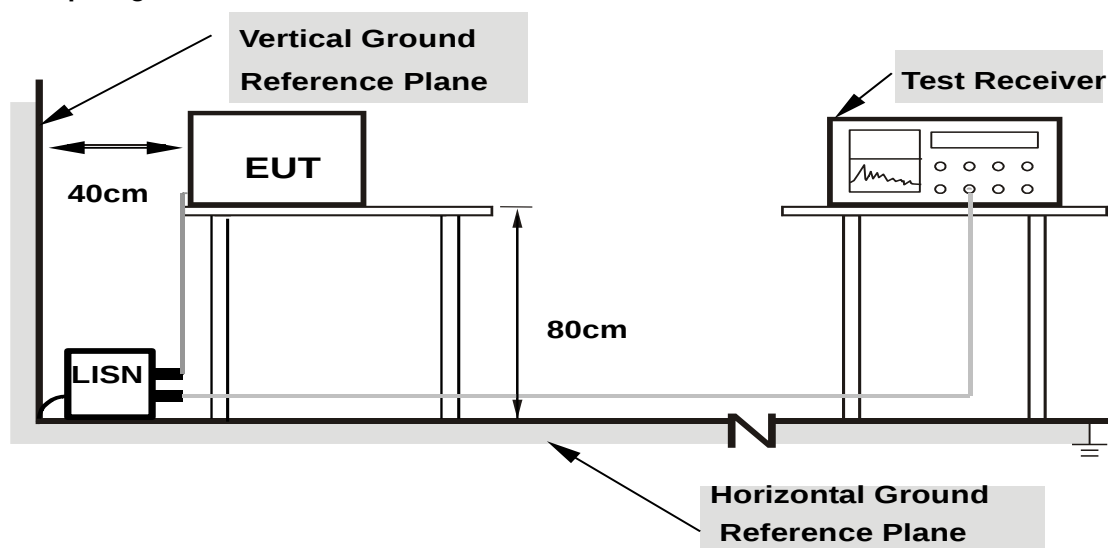

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB μ V/m) = Level(dB μ V/m) - Limit Level (dB μ V/m)

4 Test Result

4.1 DTS and Occupied Channel Bandwidth Measurement

4.1.1 Limit of 6dB Bandwidth

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.1.2 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v05r02.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Turn on the EUT and connect it to measurement instrument.
4. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
5. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) setting should be 1%-5% of OBW, please revise and set the Video bandwidth (VBW) $\geq 3 \times$ RBW.

4.1.3 Test Result of 6dB Bandwidth

Refer to Appendix A of this test report.

4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

4.2 Maximum Conducted Output Power Measurement

4.2.1 Limit of Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

4.2.2 Test Procedures

7. The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.2.4 Measurement using a spectrum analyzer.
8. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
9. Turn on the EUT and connect it to spectrum analyzer.
10. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
11. Measure the duty cycle, x , of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
12. Set span to at least $1.5 \times \text{OBW}$. Set RBW=510KHz, VBW=2MHz, Number of points in sweep $\geq 2/3 \times \text{span}$, Sweep time = auto. Detector = RMS
13. Allow the sweep to "free run". Trace average 100 traces in RMS mode
14. Compute power by integrating the spectrum across the OBW of the signal using the instrument's Channel power measurement function with band limits set equal to the OBW band edges.
15. Add $10 \log (1/x)$, where x is the duty cycle.

4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

4.2.4 Test Result of Duty Cycle

Refer to Appendix D of this test report.

4.3 Maximum Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density

FCC§15.247(e)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

4.3.2 Test Procedure

1. The testing follows Measurement Procedure 8.4 DTS maximum power spectral density level in the fundamental emission of ANSI C63.10-2013 section 11.9.2.2.4
2. Turn on the EUT and connect it to measurement instrument.
3. Measure the duty cycle, x , of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
4. Set span to at least $1.5 \times \text{OBW}$. Set RBW= 30 KHz, VBW=100 KHz, Number of points in sweep $\geq 2/3 \times \text{span}$, Sweep time = auto.
5. Detector = power averaging (rms), Sweep time = auto couple, Trace mode = averaging (rms) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.
6. Add $10 \log(1/x)$, where x is the duty cycle.
7. Measure and record the results in the test report.
8. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.
9. Add $10 \log(1/x)$, where x is the duty cycle. The duty cycle factor has been compensated to the ‘offset’ of the spectrum analyser.

4.3.3 Test Result of Power Spectral Density

Refer to Appendix E of this test report.

4.4 Band Edges and Spurious Emission Measurement

4.4.1 Limit of Conducted Band Edges and Spurious Emission

FCC §15.247 (d)

Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.4.3 Test Result of Conducted Band Edges

Refer to Appendix F of this test report.

4.4.4 Test Result of Conducted Spurious Emission

Refer to Appendix G of this test report.

4.5 Radiated Band Edges and Spurious Emission Measurement

4.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 30 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


4.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.64	2.20	0.45	10Hz
802.11g	98.60	2.05	0.49	10Hz
802.11n HT20	98.49	1.91	0.52	10Hz
802.11n HT40	96.97	0.93	1.08	3kHz

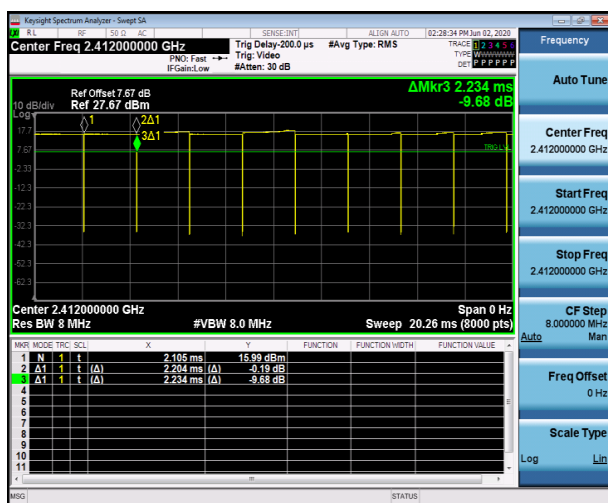


802.11b

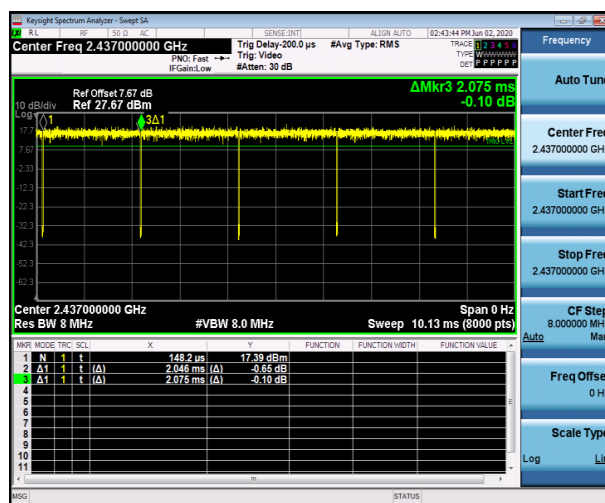

802.11g

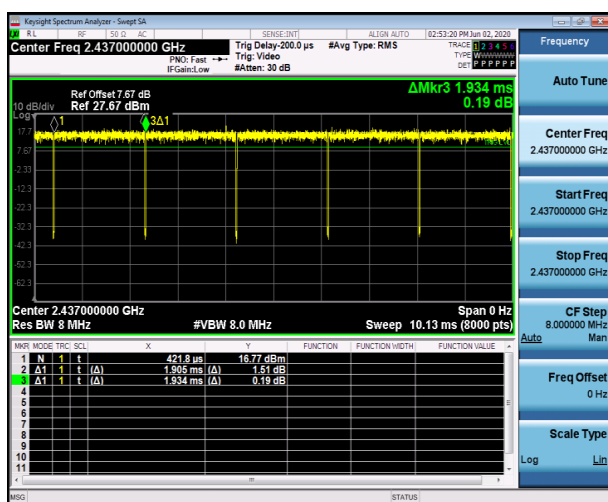

802.11n HT20

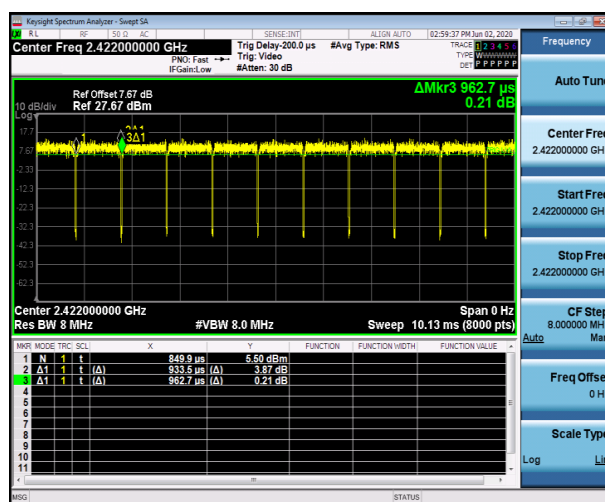

802.11n HT40

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


4.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.5.4 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMv1-01		

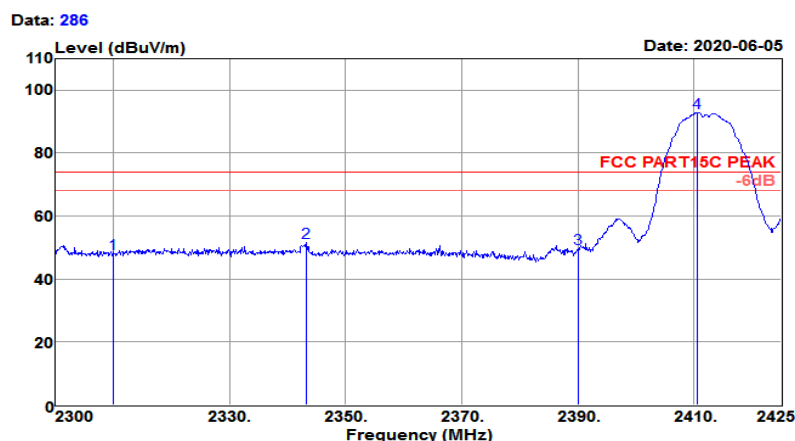

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	52.27	27.38	4.11	35.61	48.15	74.00	-25.85	Peak
2343.250	55.67	27.46	4.14	35.68	51.59	74.00	-22.41	Peak
2390.000	53.60	27.56	4.18	35.79	49.55	74.00	-24.45	Peak
2410.625	97.01	27.60	4.20	35.84	92.97	74.00	18.97	Peak

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11b CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

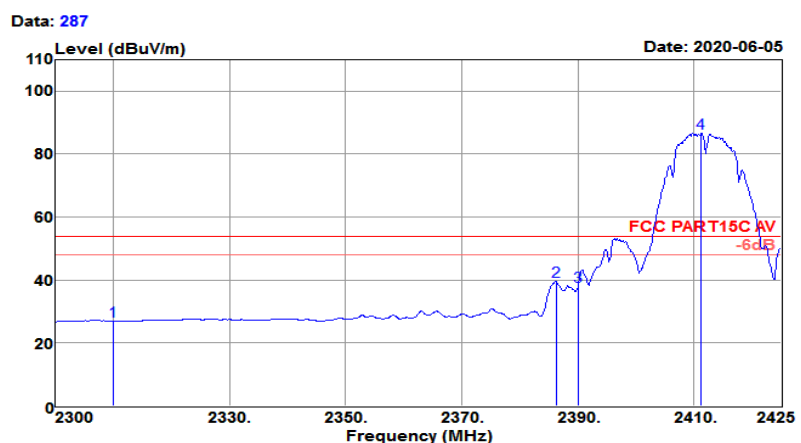

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	31.13	27.38	4.11	35.61	27.01	54.00	-26.99	Average
2386.250	43.75	27.55	4.18	35.78	39.70	54.00	-14.30	Average
2390.000	42.00	27.56	4.18	35.79	37.95	54.00	-16.05	Average
2411.250	90.78	27.60	4.20	35.84	86.74	54.00	32.74	Average

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating	: 120Wac
EUT	: Librem Mini		
Model No.	: LMV1-01		

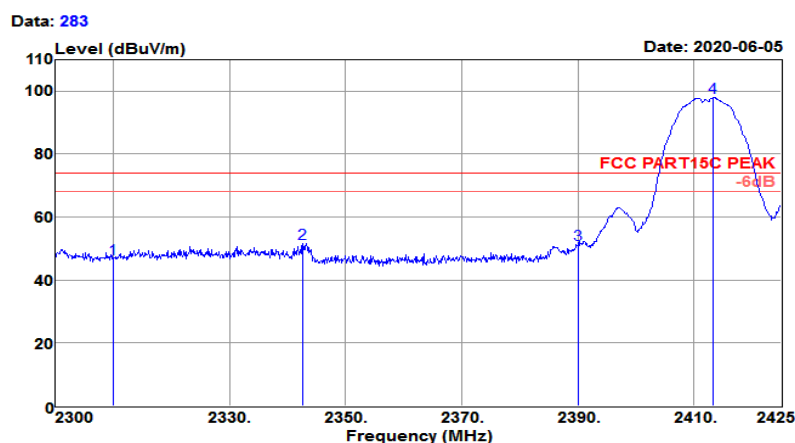

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	50.86	27.38	4.11	35.61	46.74	74.00	-27.26	Peak
2342.625	55.82	27.45	4.14	35.68	51.73	74.00	-22.27	Peak
2390.000	55.46	27.56	4.18	35.79	51.41	74.00	-22.59	Peak
2413.375	101.92	27.61	4.20	35.84	97.89	74.00	23.89	Peak

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11b CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

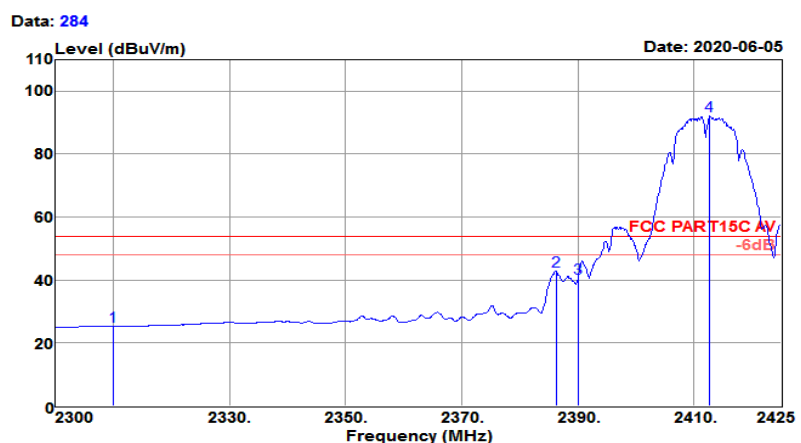

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.46	27.38	4.11	35.61	25.34	54.00	-28.66	Average
2386.250	47.05	27.55	4.18	35.78	43.00	54.00	-11.00	Average
2390.000	44.55	27.56	4.18	35.79	40.50	54.00	-13.50	Average
2412.750	96.04	27.61	4.20	35.84	92.01	54.00	38.01	Average

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

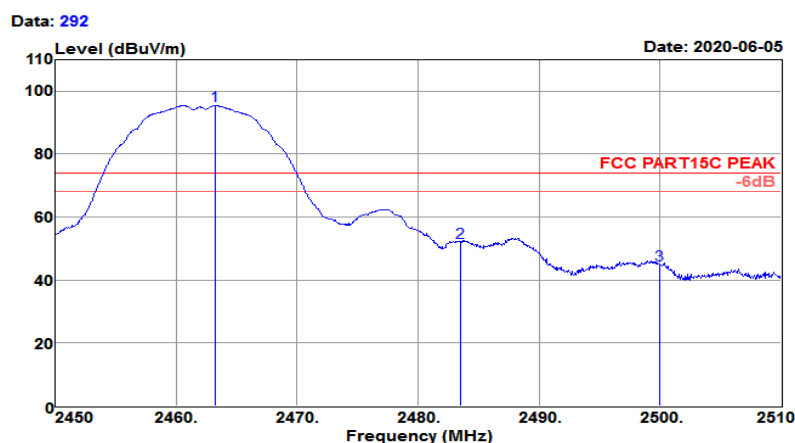


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.260	99.44	27.72	4.24	35.96	95.44	74.00	21.44	Peak
2483.500	56.03	27.76	4.26	36.00	52.05	74.00	-21.95	Peak
2500.000	48.67	27.80	4.28	36.04	44.71	74.00	-29.29	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		


Data: 293

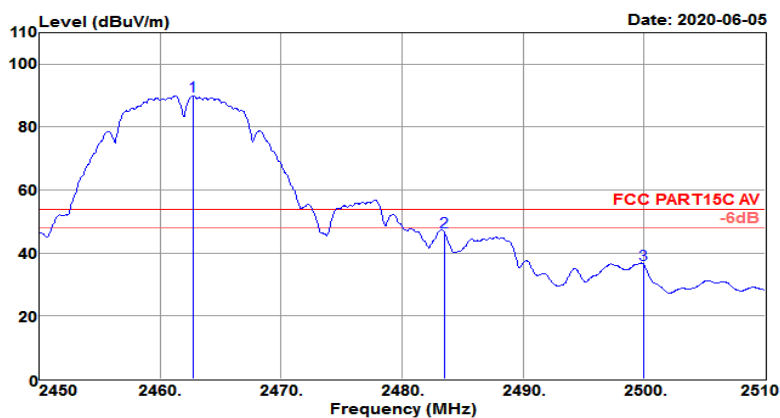

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.720	94.00	27.72	4.24	35.96	90.00	54.00	36.00	Average
2483.500	50.67	27.76	4.26	36.00	46.69	54.00	-7.31	Average
2500.000	40.21	27.80	4.28	36.04	36.25	54.00	-17.75	Average

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

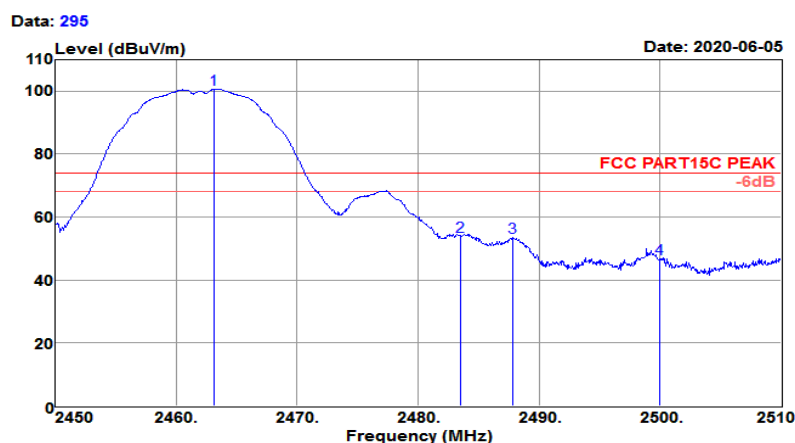

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.140	104.73	27.72	4.24	35.96	100.73	74.00	26.73	Peak
2483.500	57.86	27.76	4.26	36.00	53.88	74.00	-20.12	Peak
2487.800	57.65	27.77	4.26	36.01	53.67	74.00	-20.33	Peak
2500.000	50.58	27.80	4.28	36.04	46.62	74.00	-27.38	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

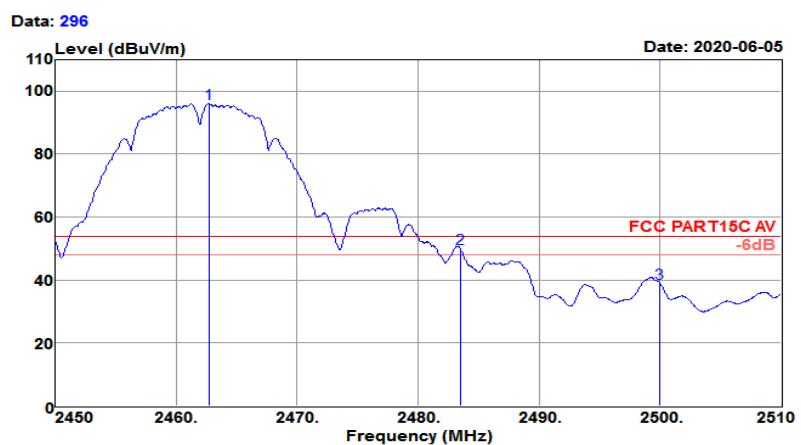

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.720	100.07	27.72	4.24	35.96	96.07	54.00	42.07	Average
2483.500	54.00	27.76	4.26	36.00	50.02	54.00	-3.98	Average
2500.000	43.03	27.80	4.28	36.04	39.07	54.00	-14.93	Average

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating	: 120Wac
EUT	: Librem Mini		
Model No.	: LMV1-01		

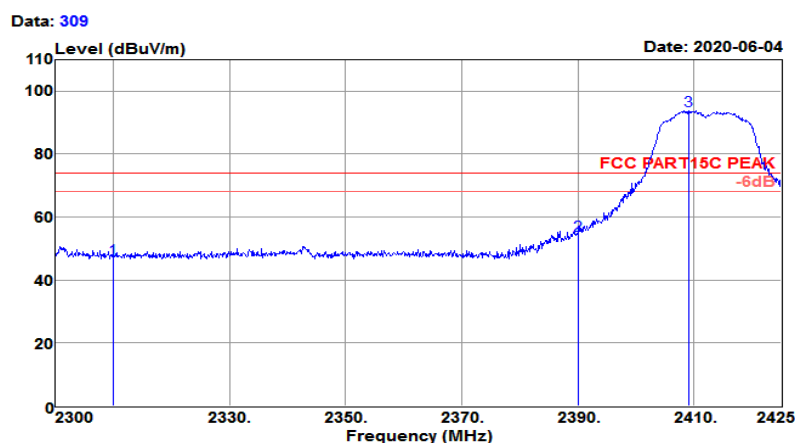

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	50.87	27.38	4.11	35.61	46.75	74.00	-27.25	Peak
2390.000	58.23	27.56	4.18	35.79	54.18	74.00	-19.82	Peak
2409.125	97.77	27.60	4.20	35.83	93.74	74.00	19.74	Peak

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11g CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

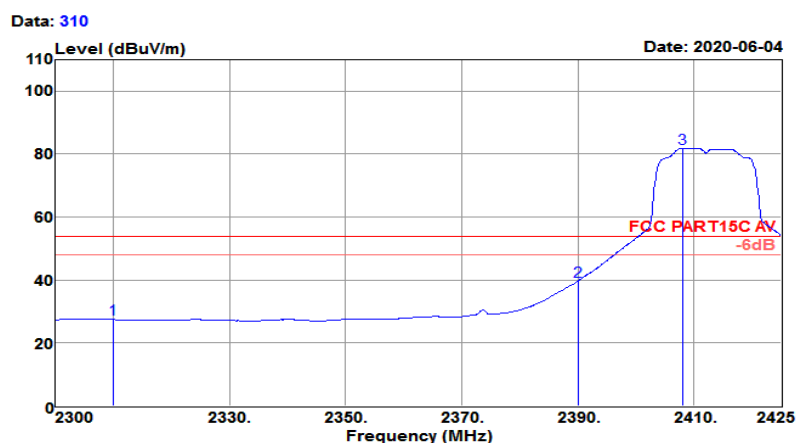

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	31.61	27.38	4.11	35.61	27.49	54.00	-26.51	Average
2390.000	43.66	27.56	4.18	35.79	39.61	54.00	-14.39	Average
2408.125	85.96	27.60	4.20	35.83	81.93	54.00	27.93	Average

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11g CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

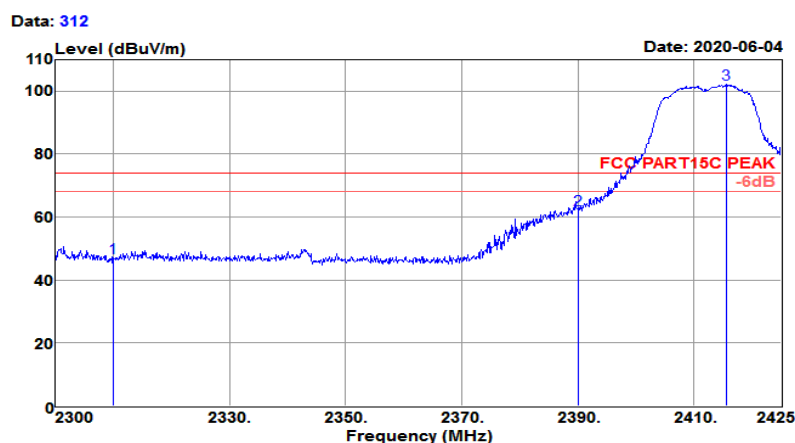

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	51.08	27.38	4.11	35.61	46.96	74.00	-27.04	Peak
2390.000	66.27	27.56	4.18	35.79	62.22	74.00	-11.78	Peak
2415.500	106.43	27.61	4.20	35.85	102.39	74.00	28.39	Peak


Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11g CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

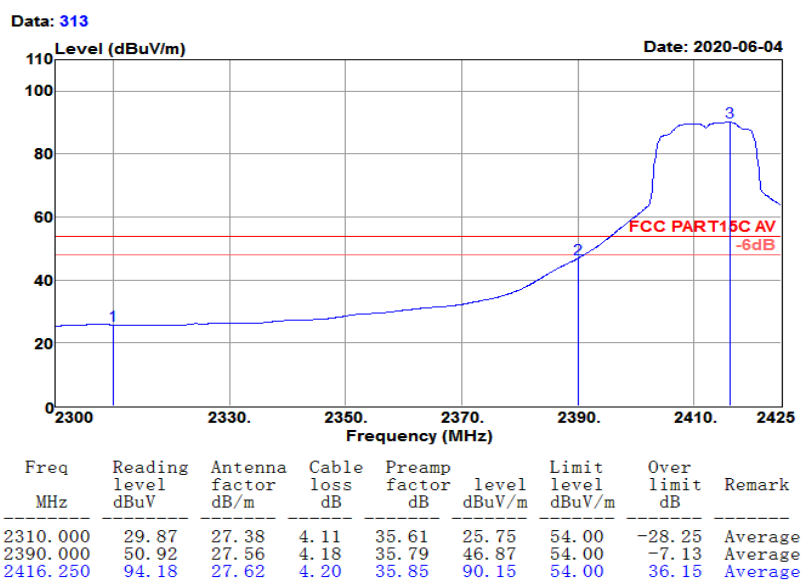

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

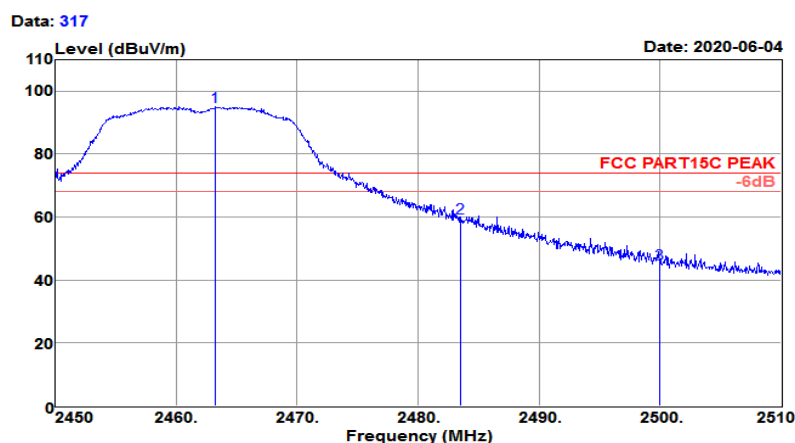

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.260	98.96	27.72	4.24	35.96	94.96	74.00	20.96	Peak
2483.500	63.62	27.76	4.26	36.00	59.64	74.00	-14.36	Peak
2500.000	48.96	27.80	4.28	36.04	45.00	74.00	-29.00	Peak

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

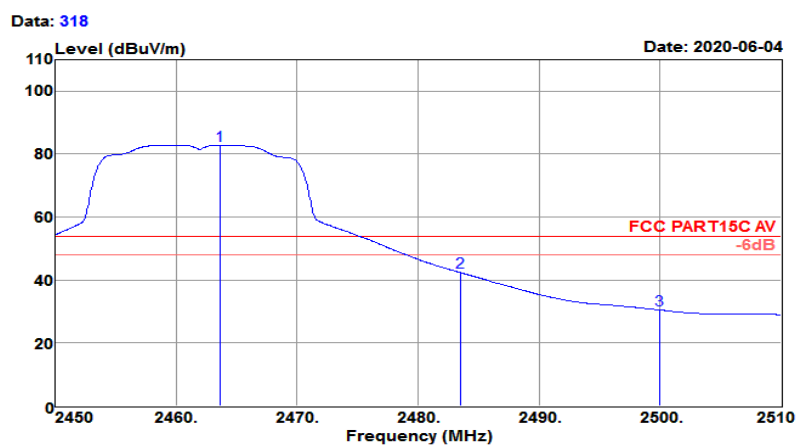

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.620	86.90	27.72	4.24	35.96	82.90	54.00	28.90	Average
2483.500	46.38	27.76	4.26	36.00	42.40	54.00	-11.60	Average
2500.000	34.47	27.80	4.28	36.04	30.51	54.00	-23.49	Average

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating	: 120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

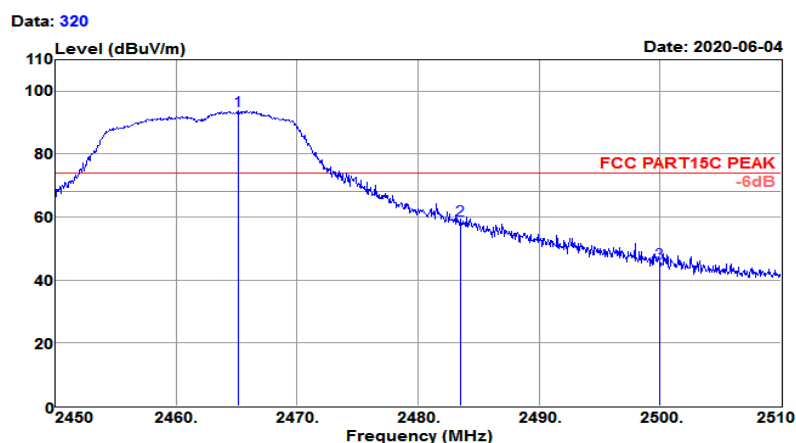


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2465.120	97.80	27.72	4.25	35.96	93.81	74.00	19.81	Peak
2483.500	62.93	27.76	4.26	36.00	58.95	74.00	-15.05	Peak
2500.000	49.56	27.80	4.28	36.04	45.60	74.00	-28.40	Peak

Test Mode :	802.11g CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		


Data: 321

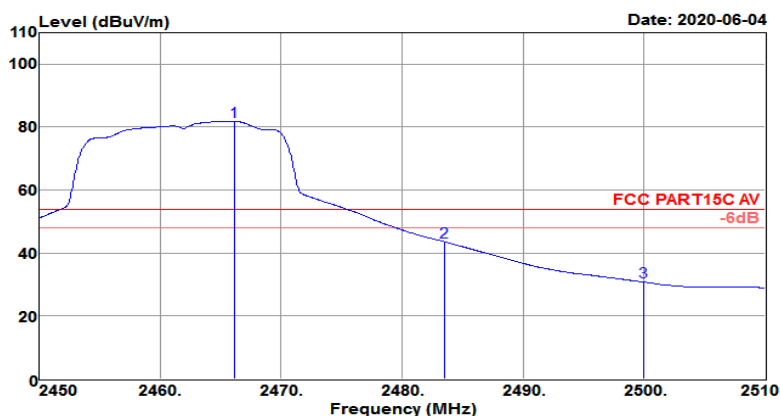

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2466.140	85.83	27.73	4.25	35.96	81.85	54.00	27.85	Average
2483.500	47.60	27.76	4.26	36.00	43.62	54.00	-10.38	Average
2500.000	34.75	27.80	4.28	36.04	30.79	54.00	-23.21	Average

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT20 CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

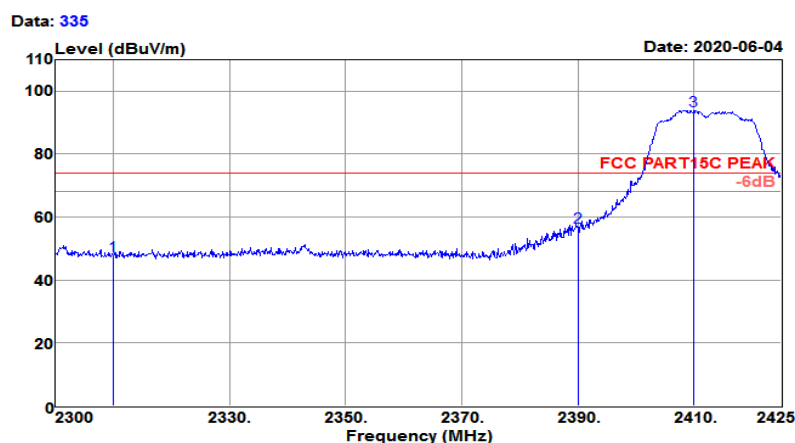

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	51.71	27.38	4.11	35.61	47.59	74.00	-26.41	Peak
2390.000	61.01	27.56	4.18	35.79	56.96	74.00	-17.04	Peak
2410.000	97.95	27.60	4.20	35.83	93.92	74.00	19.92	Peak


Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT20 CH01(2412MHz)
 Power rating: 120Vac
 EUT : Librem Mini
 Model No. : LMV1-01

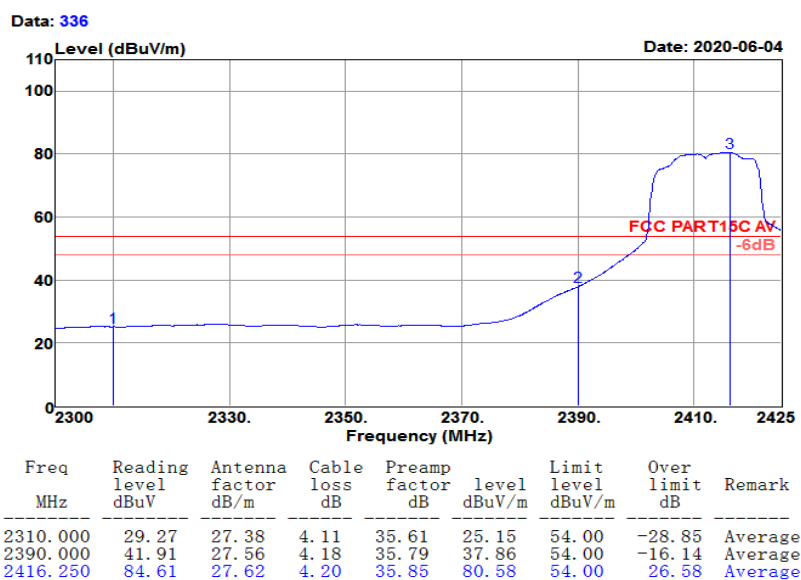

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT20 CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

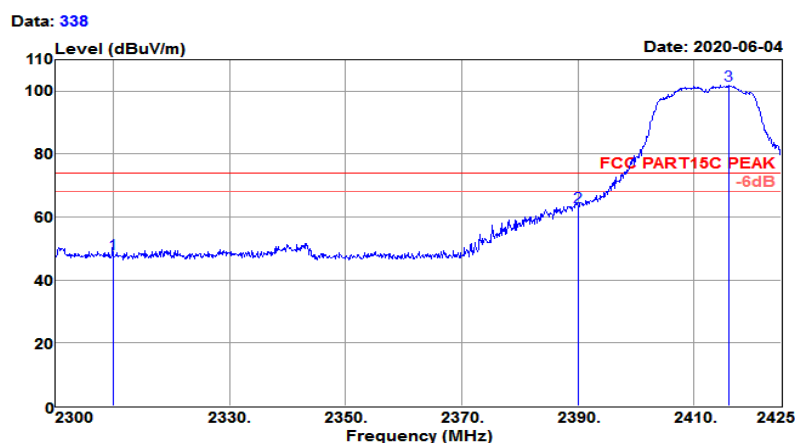

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	52.57	27.38	4.11	35.61	48.45	74.00	-25.55	Peak
2390.000	67.43	27.56	4.18	35.79	63.38	74.00	-10.62	Peak
2416.000	105.82	27.62	4.20	35.85	101.79	74.00	27.79	Peak


Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT20 CH01(2412MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

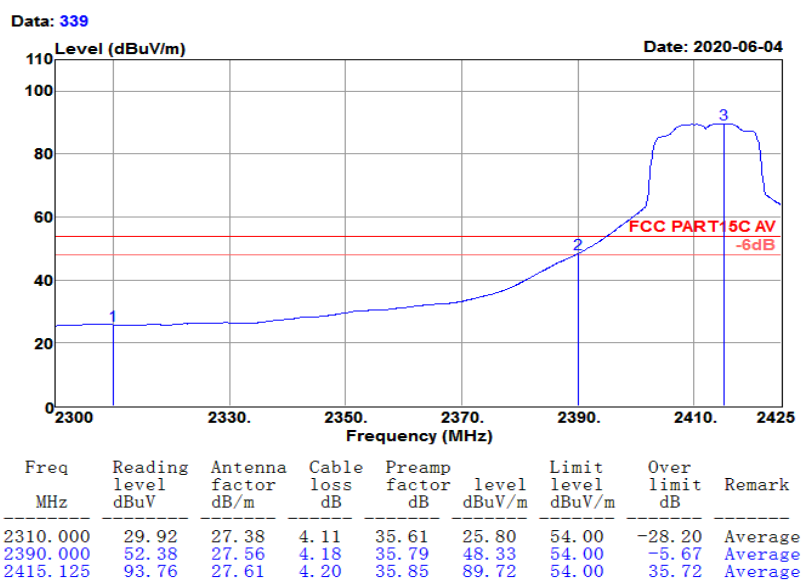

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

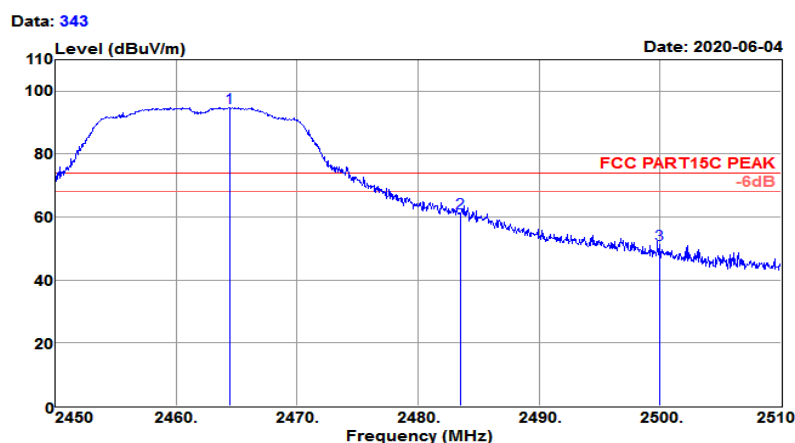

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2464.460	98.87	27.72	4.24	35.96	94.87	74.00	20.87	Peak
2483.500	65.40	27.76	4.26	36.00	61.42	74.00	-12.58	Peak
2500.000	55.36	27.80	4.28	36.04	51.40	74.00	-22.60	Peak

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT20 CH11(2462MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

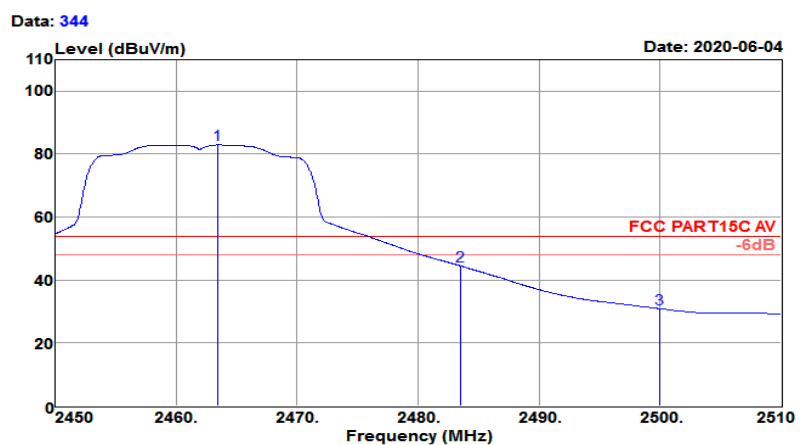

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.440	86.97	27.72	4.24	35.96	82.97	54.00	28.97	Average
2483.500	48.50	27.76	4.26	36.00	44.52	54.00	-9.48	Average
2500.000	34.87	27.80	4.28	36.04	30.91	54.00	-23.09	Average

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT20 CH11(2462MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

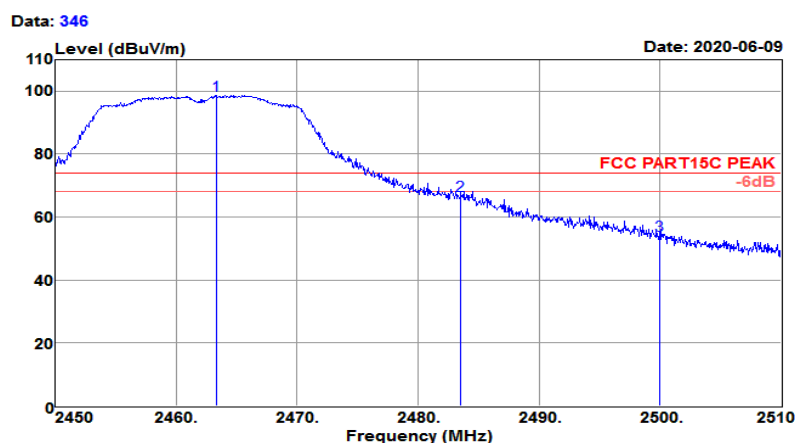


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.320	106.84	27.72	0.00	35.96	98.60	74.00	24.60	Peak
2483.500	75.01	27.76	0.00	36.00	66.77	74.00	-7.23	Peak
2500.000	62.46	27.80	0.00	36.04	54.22	74.00	-19.78	Peak

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT20 CH11(2462MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01


Data: 347

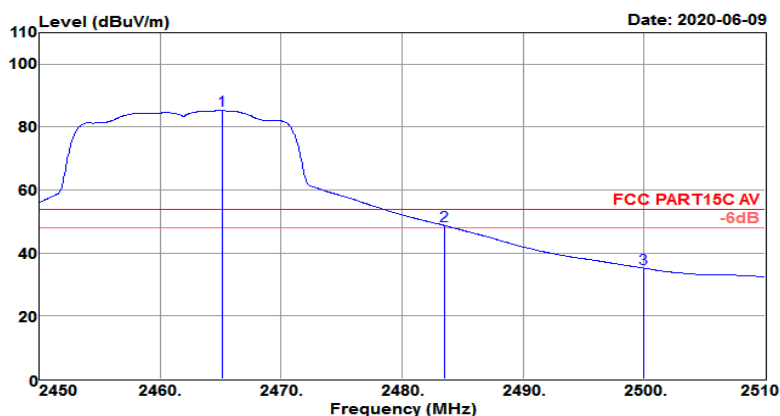

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2465.180	93.49	27.72	0.00	35.96	85.25	54.00	31.25	Average
2483.500	57.02	27.76	0.00	36.00	48.78	54.00	-5.22	Average
2500.000	43.43	27.80	0.00	36.04	35.19	54.00	-18.81	Average

Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.45GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT40 CH03(2422MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

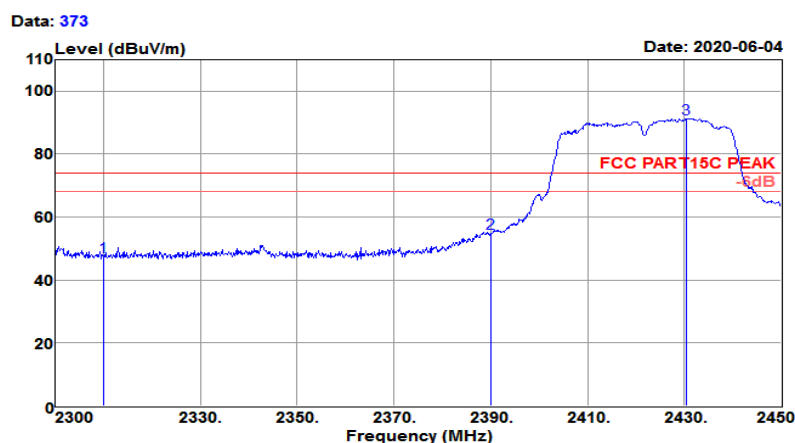

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	51.56	27.38	4.11	35.61	47.44	74.00	-26.56	Peak
2390.000	59.02	27.56	4.18	35.79	54.97	74.00	-19.03	Peak
2430.500	95.34	27.65	4.22	35.88	91.33	74.00	17.33	Peak


Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.45GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT40 CH03(2422MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

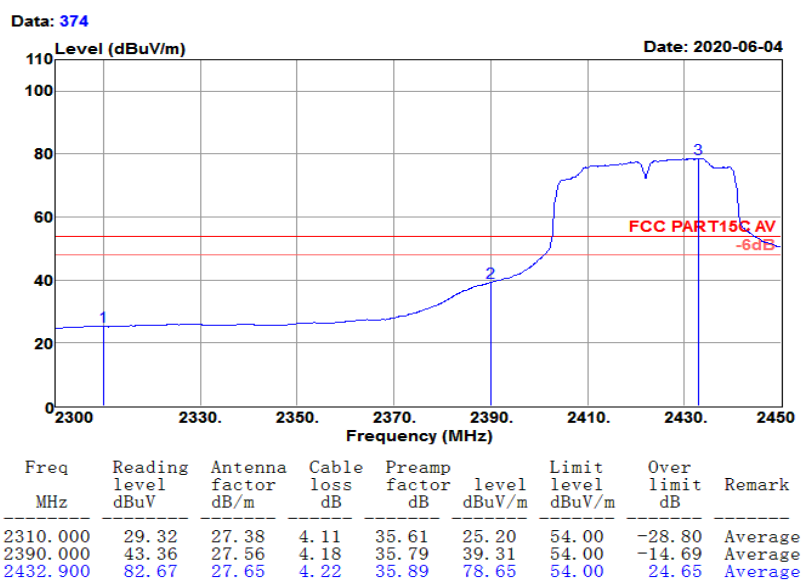

Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.45GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT40 CH03(2422MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

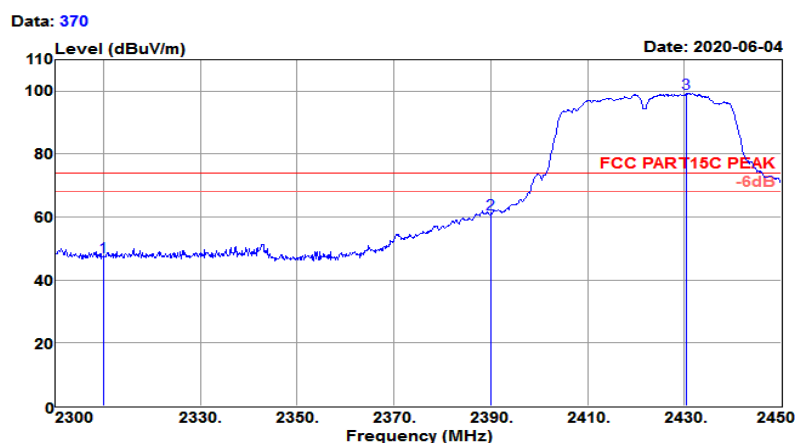

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	51.45	27.38	4.11	35.61	47.33	74.00	-26.67	Peak
2390.000	65.16	27.56	4.18	35.79	61.11	74.00	-12.89	Peak
2430.500	103.35	27.65	4.22	35.88	99.34	74.00	25.34	Peak

Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.45GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT40 CH03(2422MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

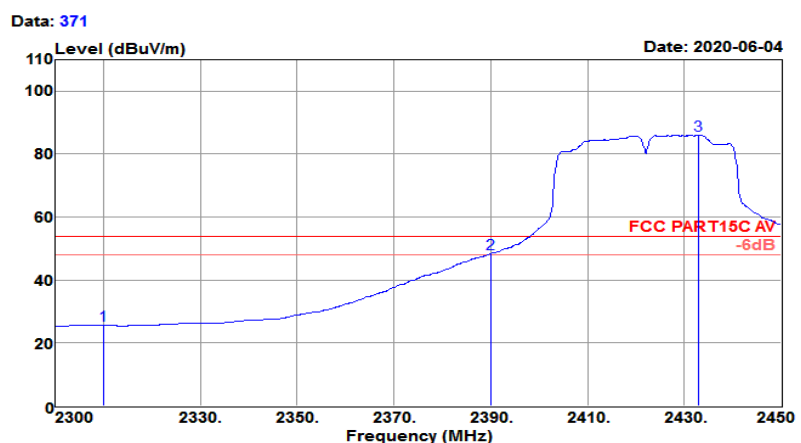

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.70	27.38	4.11	35.61	25.58	54.00	-28.42	Average
2390.000	52.45	27.56	4.18	35.79	48.40	54.00	-5.60	Average
2432.900	90.07	27.65	4.22	35.89	86.05	54.00	32.05	Average

Test Mode :	802.11n HT40 CH09 (2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.425GHz~2.51GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT40 CH09(2452MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

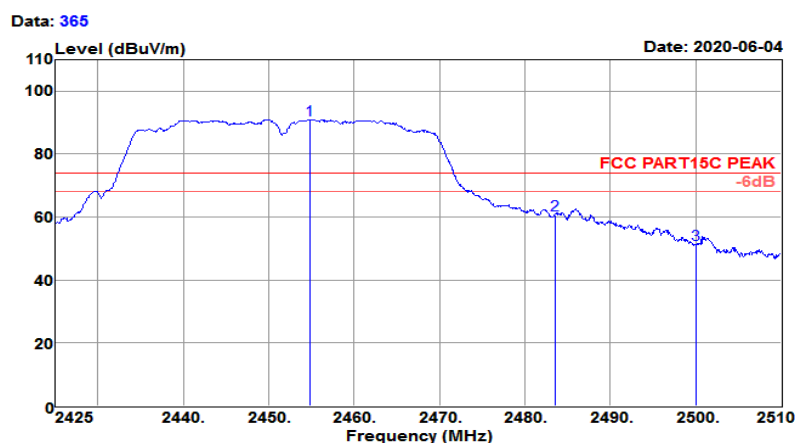

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2454.835	94.96	27.70	4.24	35.94	90.96	74.00	16.96	Peak
2483.500	64.64	27.76	4.26	36.00	60.66	74.00	-13.34	Peak
2500.000	55.31	27.80	4.28	36.04	51.35	74.00	-22.65	Peak

Test Mode :	802.11n HT40 CH09 (2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.425GHz~2.51GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11N HT40 CH09(2452MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

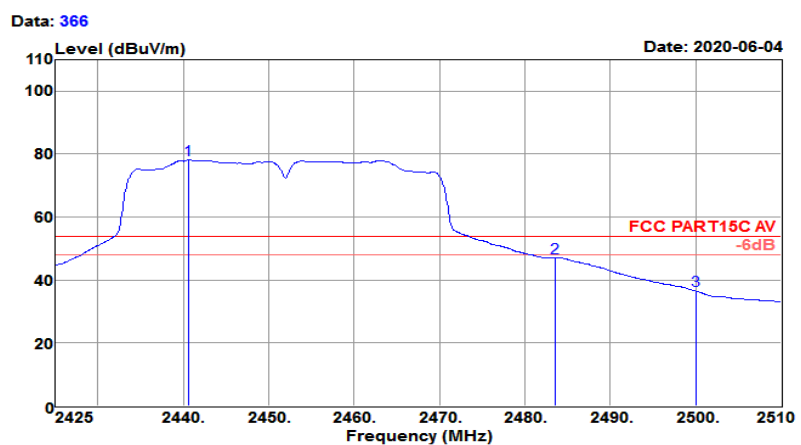

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.640	82.16	27.67	4.22	35.90	78.15	54.00	24.15	Average
2483.500	51.11	27.76	4.26	36.00	47.13	54.00	-6.87	Average
2500.000	40.52	27.80	4.28	36.04	36.56	54.00	-17.44	Average

Test Mode :	802.11n HT40 CH09 (2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.425GHz~2.51GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT40 CH09(2452MHz)
 Power rating: 120Wac
 EUT : Librem Mini
 Model No. : LMV1-01

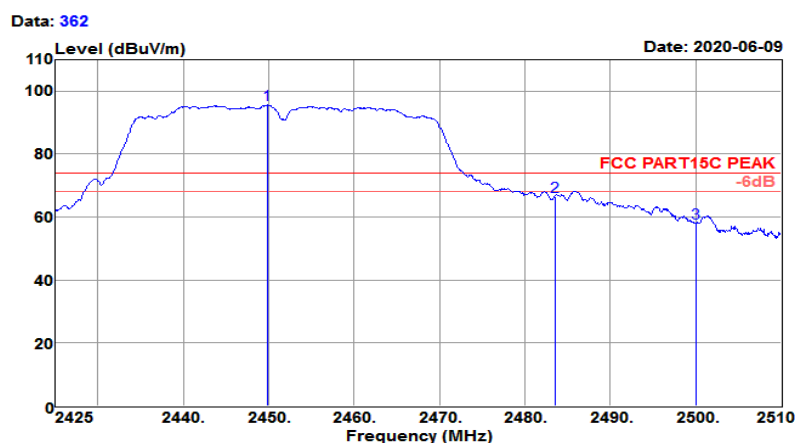


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2449.820	103.82	27.69	0.00	35.93	95.58	74.00	21.58	Peak
2483.500	74.76	27.76	0.00	36.00	66.52	74.00	-7.48	Peak
2500.000	66.47	27.80	0.00	36.04	58.23	74.00	-15.77	Peak

Test Mode :	802.11n HT40 CH09 (2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.425GHz~2.51GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT40 CH09(2452MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

Data: 363

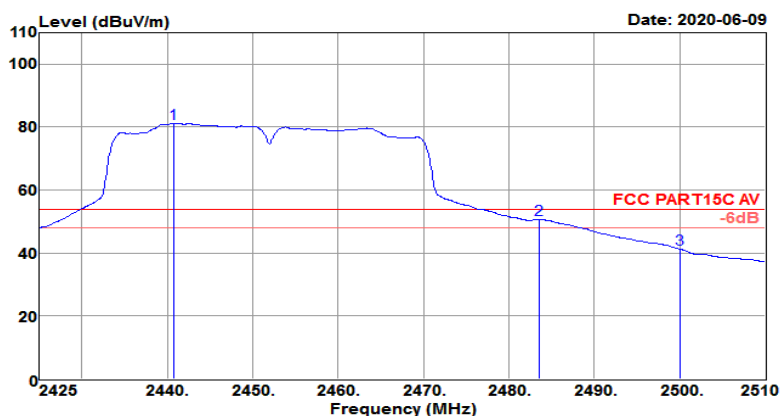


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.725	85.67	27.67	3.78	35.90	81.22	54.00	27.22	Average
2483.500	55.01	27.76	3.81	36.00	50.58	54.00	-3.42	Average
2500.000	45.73	27.80	3.82	36.04	41.31	54.00	-12.69	Average

4.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating	: 120Wac
EUT	: Librem Mini		
Model No.	: LMV1-01		

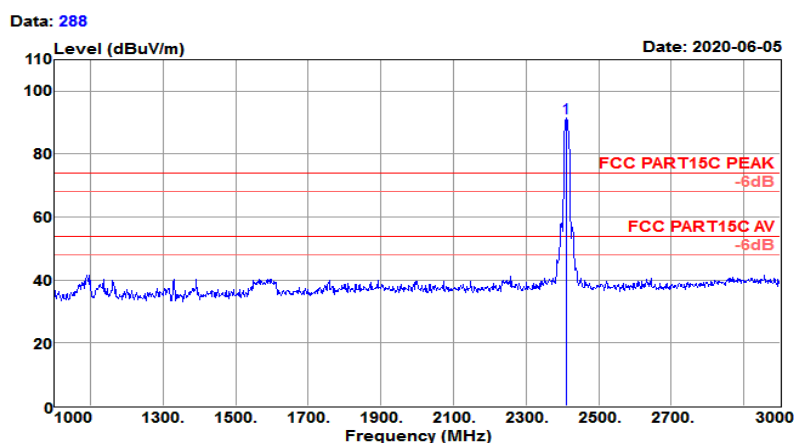

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	95.45	27.61	4.20	35.84	91.42	74.00	17.42	Peak


Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

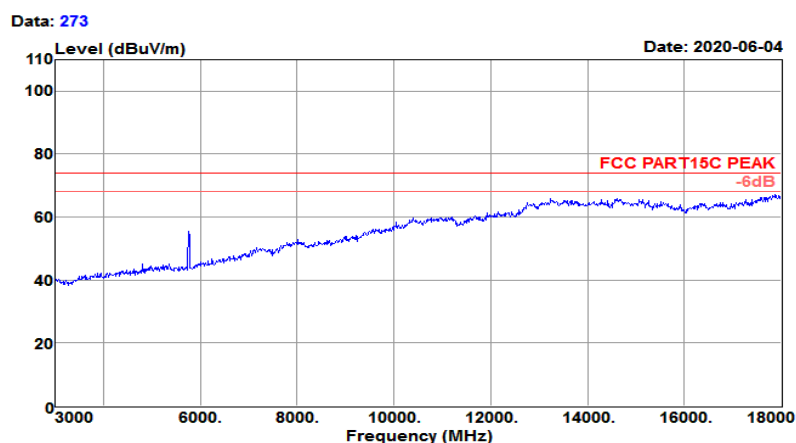

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMv1-01		

Data: 274

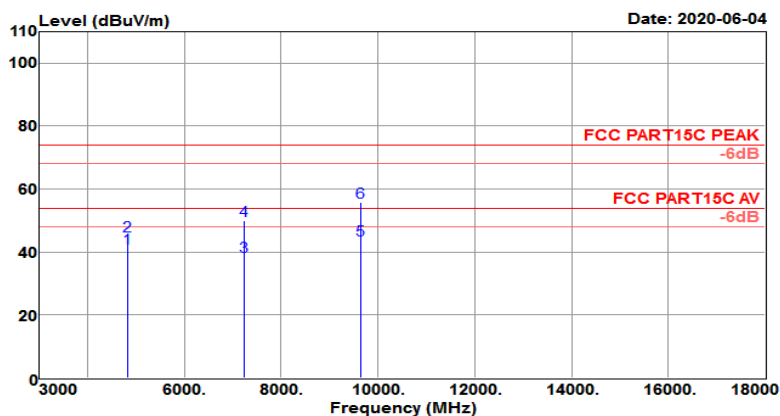


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	62.32	30.95	6.09	58.24	41.12	54.00	-12.88	Average
4824.000	66.16	30.95	6.09	58.24	44.96	74.00	-29.04	Peak
7236.000	52.63	35.47	9.21	58.53	38.78	54.00	-15.22	Average
7236.000	63.78	35.47	9.21	58.53	49.93	74.00	-24.07	Peak
9648.000	51.24	38.42	12.32	58.03	43.95	54.00	-10.05	Average
9648.000	63.03	38.42	12.32	58.03	55.74	74.00	-18.26	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

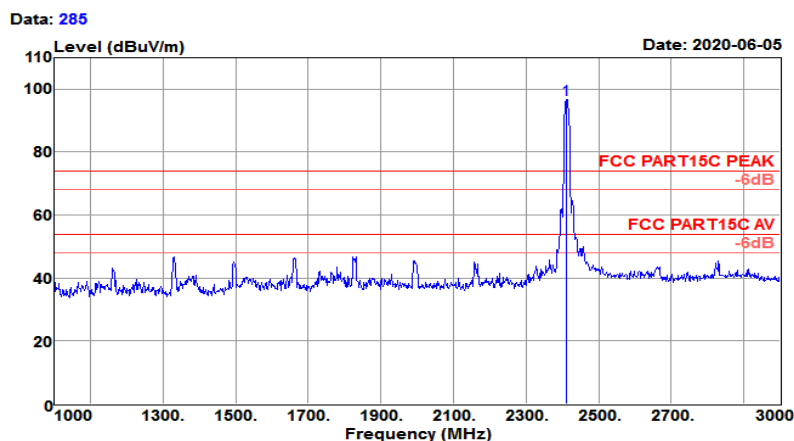

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	100.70	27.61	4.20	35.84	96.67	74.00	22.67	Peak


Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

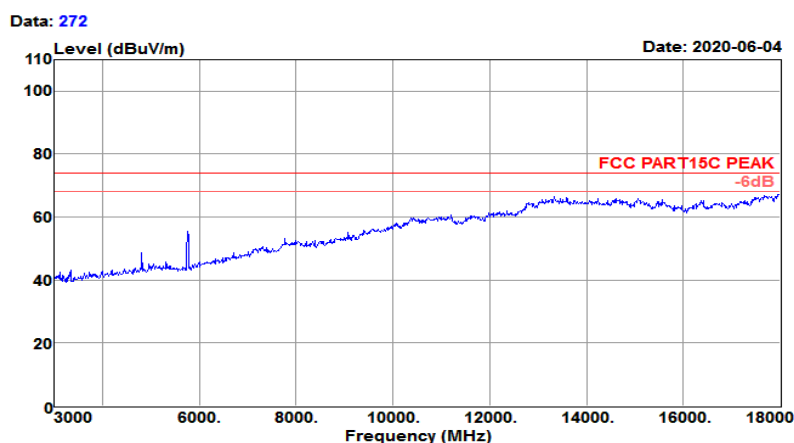

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 271

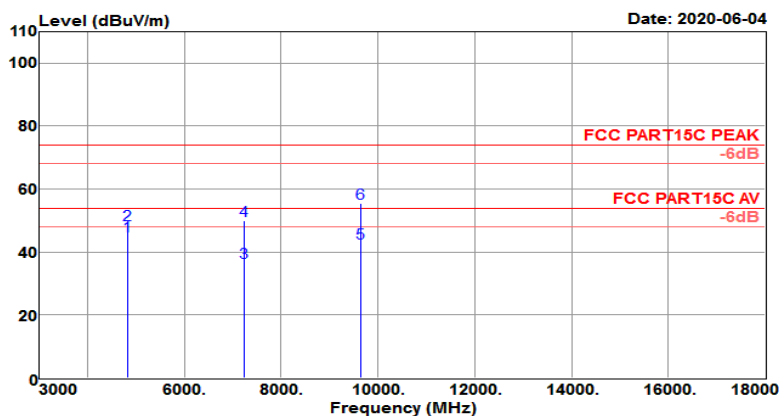


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	66.39	30.95	6.09	58.24	45.19	54.00	-8.81	Average
4824.000	69.98	30.95	6.09	58.24	48.78	74.00	-25.22	Peak
7236.000	50.39	35.47	9.21	58.53	36.54	54.00	-17.46	Average
7236.000	63.79	35.47	9.21	58.53	49.94	74.00	-24.06	Peak
9648.000	49.98	38.42	12.32	58.03	42.69	54.00	-11.31	Average
9648.000	62.80	38.42	12.32	58.03	55.51	74.00	-18.49	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11b CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

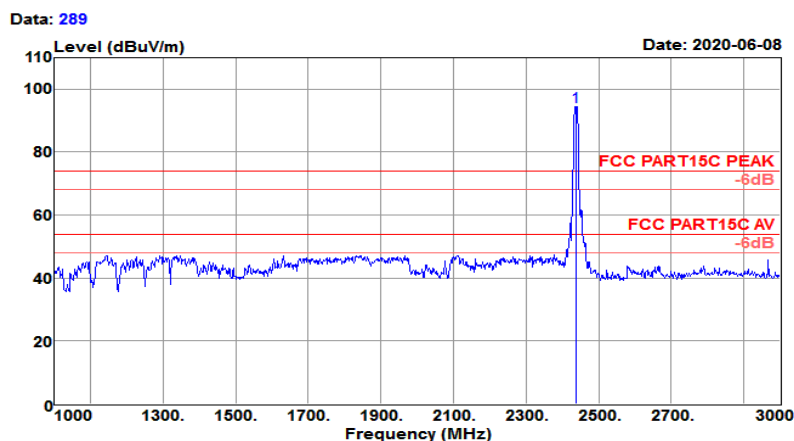

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	98.84	27.66	3.78	35.90	94.38	74.00	20.38	Peak


Test Mode :	802.11b CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

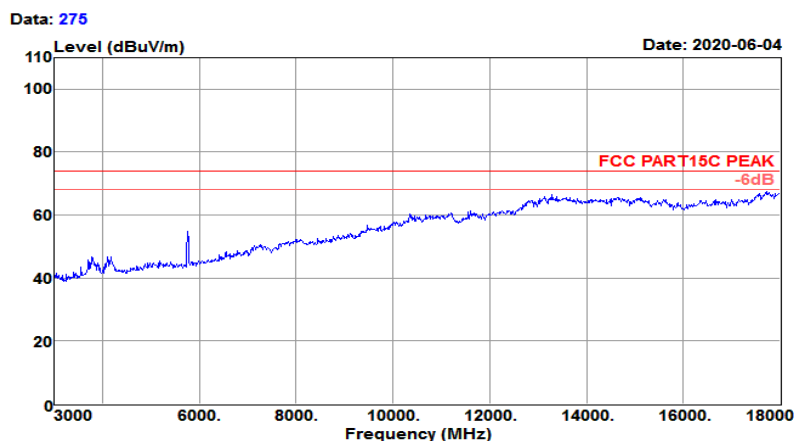

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 276

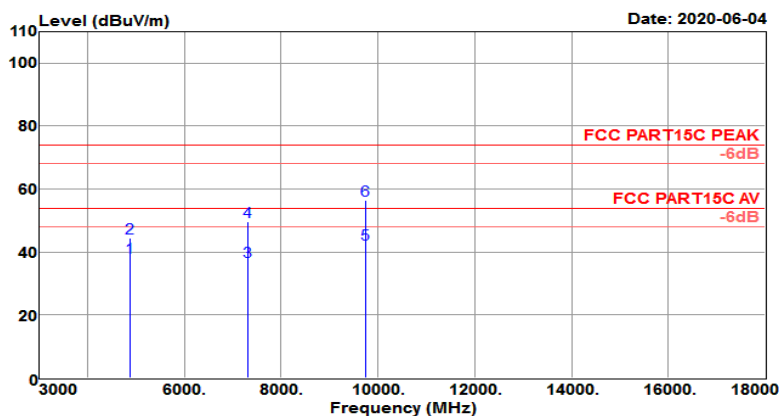


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	59.36	31.02	6.08	58.17	38.29	54.00	-15.71	Average
4874.000	65.44	31.02	6.08	58.17	44.37	74.00	-29.63	Peak
7311.000	50.58	35.65	9.20	58.56	36.87	54.00	-17.13	Average
7311.000	63.23	35.65	9.20	58.56	49.52	74.00	-24.48	Peak
9748.000	49.58	38.50	12.48	57.96	42.60	54.00	-11.40	Average
9748.000	63.56	38.50	12.48	57.96	56.58	74.00	-17.42	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11b CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

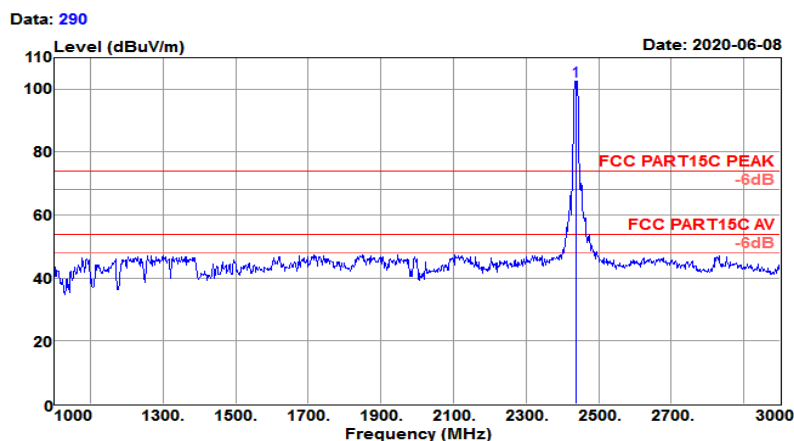

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	106.90	27.66	3.78	35.90	102.44	74.00	28.44	Peak


Test Mode :	802.11b CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

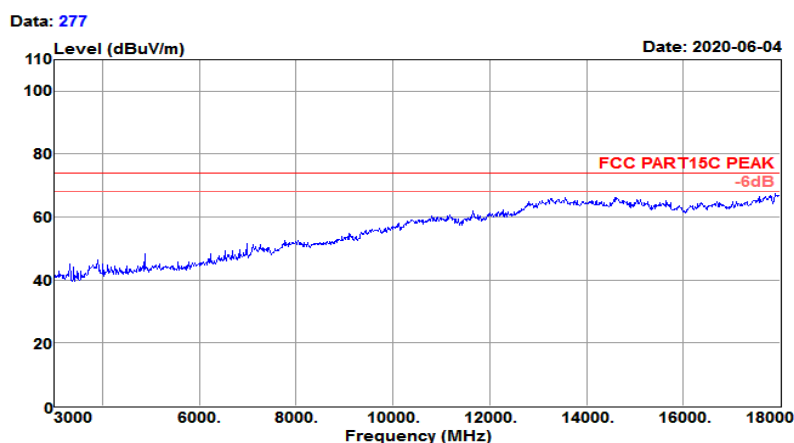

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 278

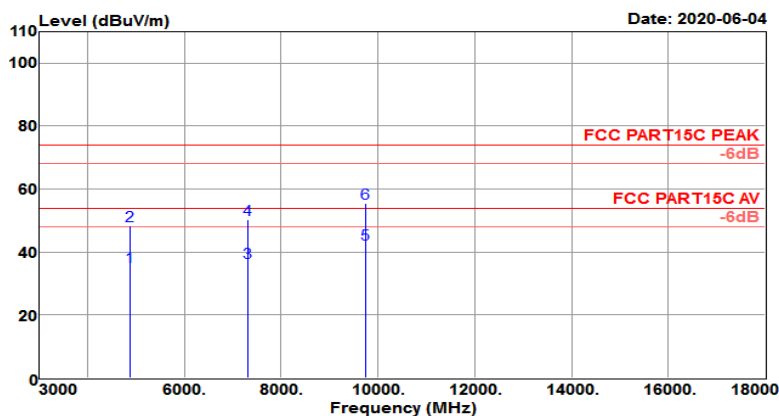


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	56.32	31.02	6.08	58.17	35.25	54.00	-18.75	Average
4874.000	69.59	31.02	6.08	58.17	48.52	74.00	-25.48	Peak
7311.000	50.50	35.65	9.20	58.56	36.79	54.00	-17.21	Average
7311.000	63.97	35.65	9.20	58.56	50.26	74.00	-23.74	Peak
9748.000	49.62	38.50	12.48	57.96	42.64	54.00	-11.36	Average
9748.000	62.51	38.50	12.48	57.96	55.53	74.00	-18.47	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11b CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

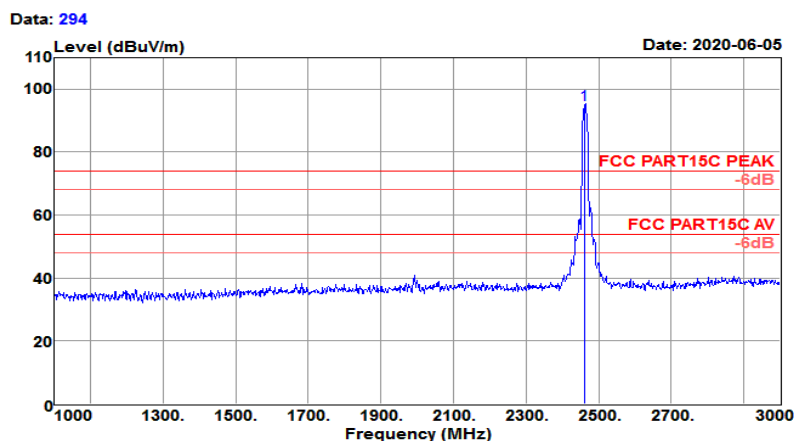

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	99.15	27.72	4.24	35.95	95.16	74.00	21.16	Peak


Test Mode :	802.11b CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

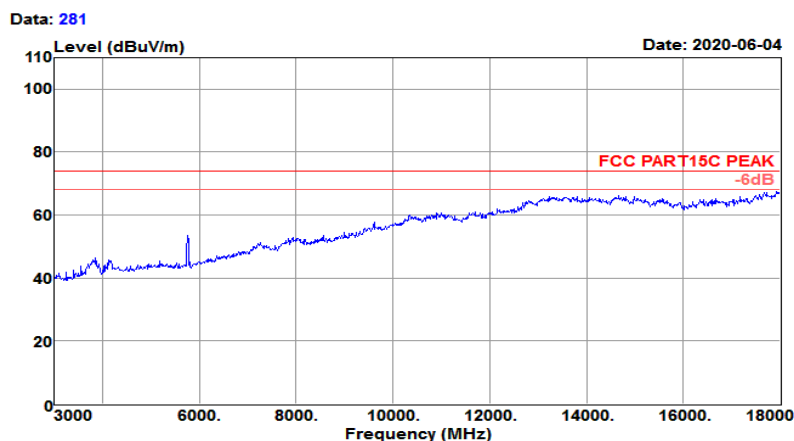

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 282

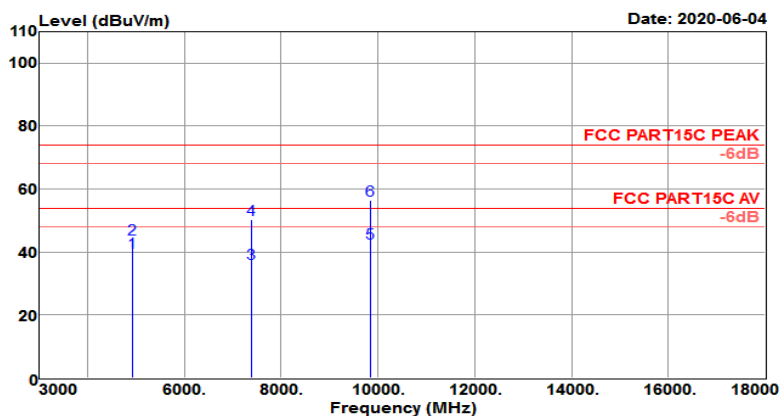


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	60.88	31.09	6.08	58.11	39.94	54.00	-14.06	Average
4924.000	65.05	31.09	6.08	58.11	44.11	74.00	-29.89	Peak
7386.000	49.97	35.83	9.18	58.59	36.39	54.00	-17.61	Average
7386.000	63.79	35.83	9.18	58.59	50.21	74.00	-23.79	Peak
9848.000	49.20	38.58	12.83	57.89	42.72	54.00	-11.28	Average
9848.000	62.93	38.58	12.83	57.89	56.45	74.00	-17.55	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11b CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

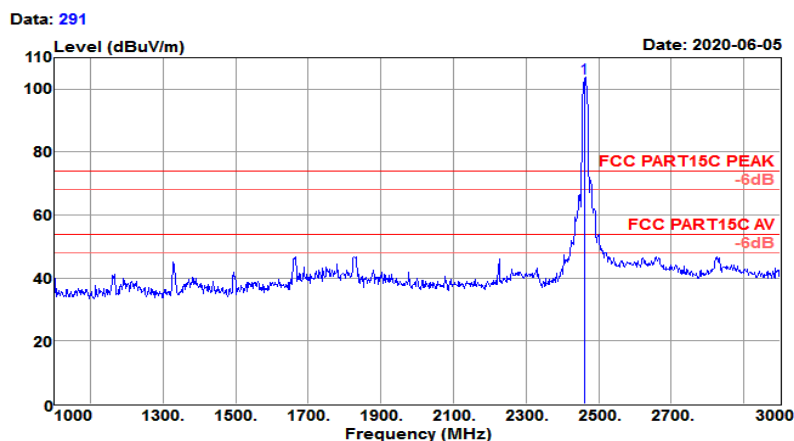


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	107.56	27.72	4.24	35.95	103.57	74.00	29.57	Peak

Test Mode :	802.11b CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

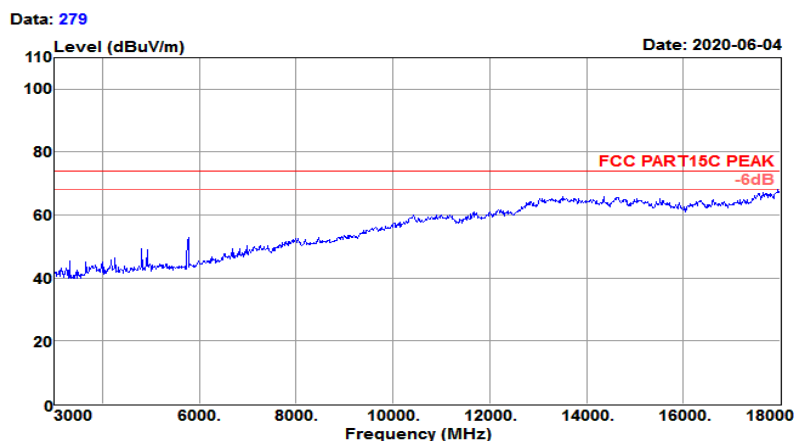

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

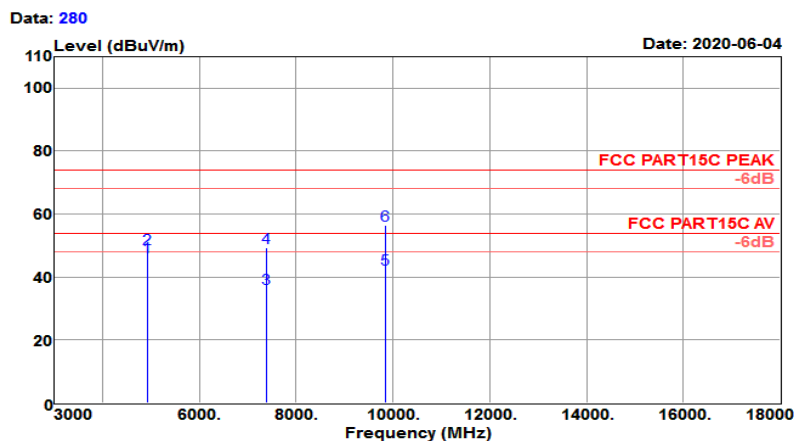


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	67.25	31.09	6.08	58.11	46.31	54.00	-7.69	Average
4924.000	69.88	31.09	6.08	58.11	48.94	74.00	-25.06	Peak
7386.000	49.93	35.83	9.18	58.59	36.35	54.00	-17.65	Average
7386.000	62.99	35.83	9.18	58.59	49.41	74.00	-24.59	Peak
9848.000	49.15	38.58	12.83	57.89	42.67	54.00	-11.33	Average
9848.000	62.95	38.58	12.83	57.89	56.47	74.00	-17.53	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

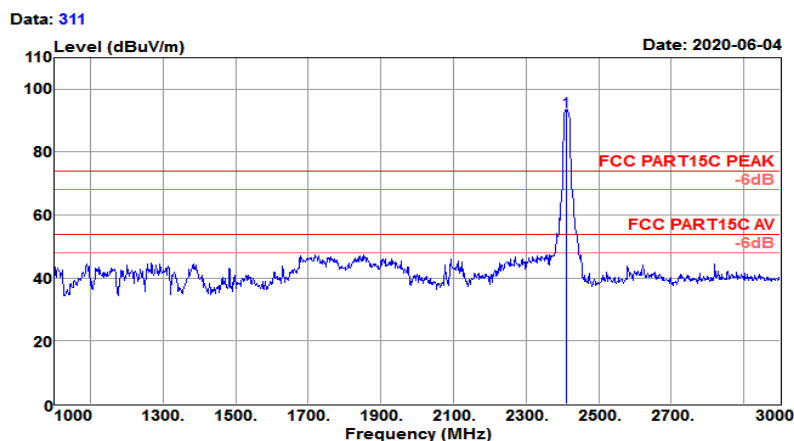

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	96.94	27.61	4.20	35.84	92.91	74.00	18.91	Peak


Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

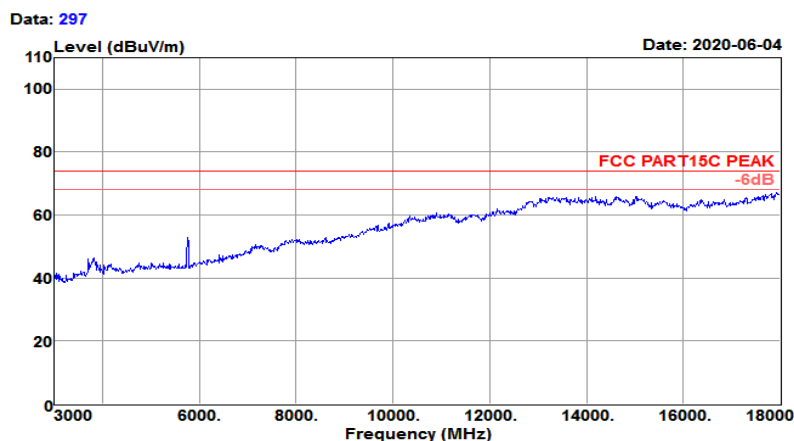

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 298

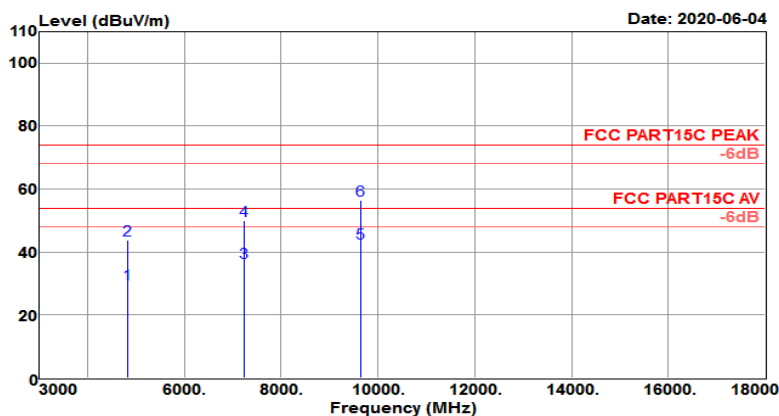


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	51.02	30.95	6.09	58.24	29.82	54.00	-24.18	Average
4824.000	64.93	30.95	6.09	58.24	43.73	74.00	-30.27	Peak
7236.000	50.54	35.47	9.21	58.53	36.69	54.00	-17.31	Average
7236.000	63.85	35.47	9.21	58.53	50.00	74.00	-24.00	Peak
9648.000	50.06	38.42	12.32	58.03	42.77	54.00	-11.23	Average
9648.000	63.63	38.42	12.32	58.03	56.34	74.00	-17.66	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

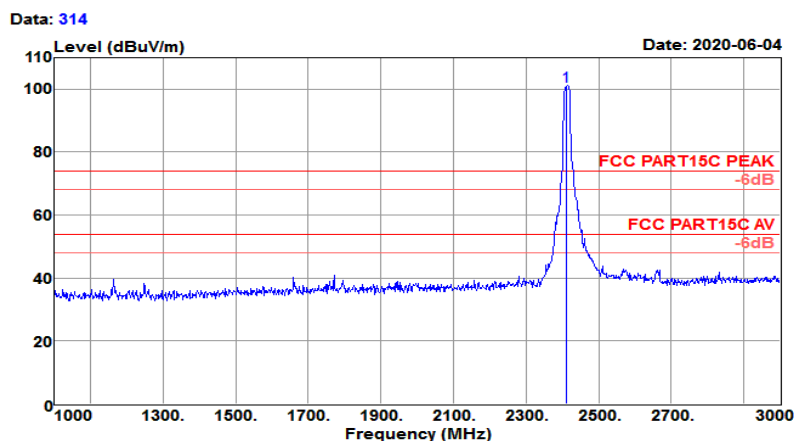

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	104.84	27.61	4.20	35.84	100.81	74.00	26.81	Peak


Test Mode :	802.11g CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

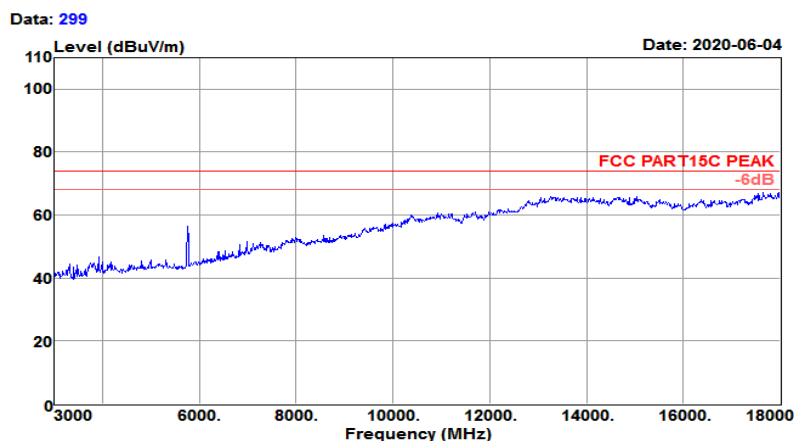

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH01(2412MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 300

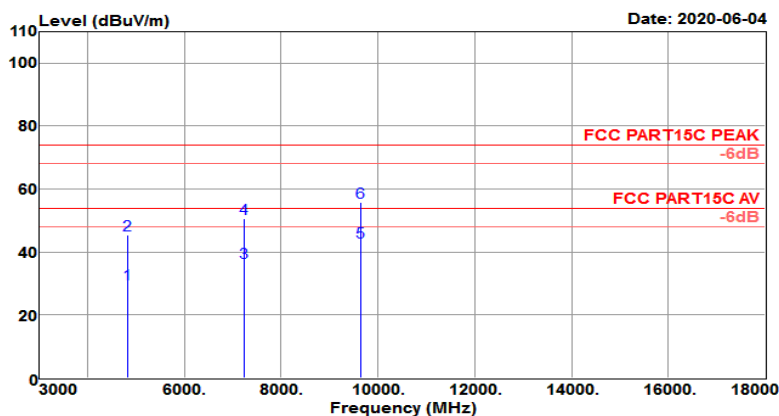


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	51.20	30.95	6.09	58.24	30.00	54.00	-24.00	Average
4824.000	66.51	30.95	6.09	58.24	45.31	74.00	-28.69	Peak
7236.000	50.57	35.47	9.21	58.53	36.72	54.00	-17.28	Average
7236.000	64.33	35.47	9.21	58.53	50.48	74.00	-23.52	Peak
9648.000	50.31	38.42	12.32	58.03	43.02	54.00	-10.98	Average
9648.000	63.01	38.42	12.32	58.03	55.72	74.00	-18.28	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

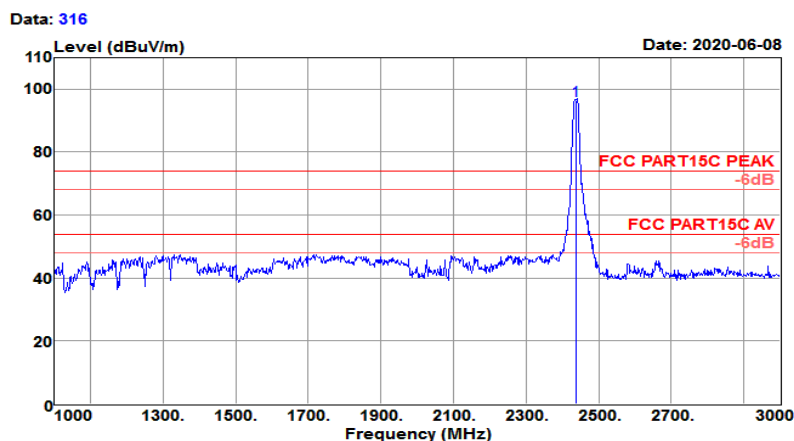

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	100.94	27.66	3.78	35.90	96.48	74.00	22.48	Peak


Test Mode :	802.11g CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

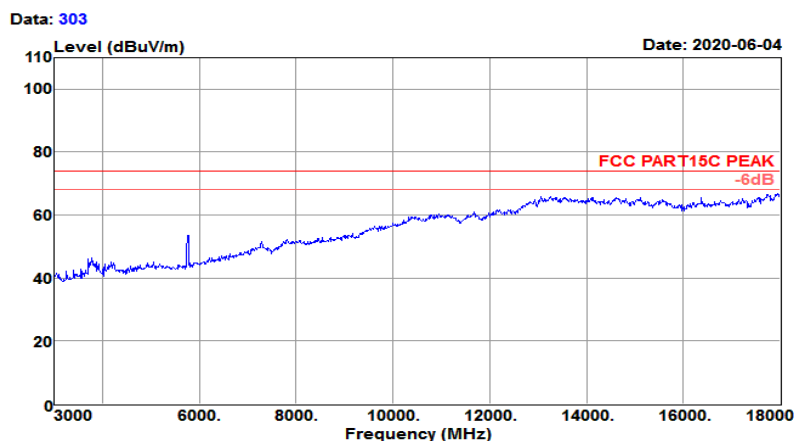

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 304

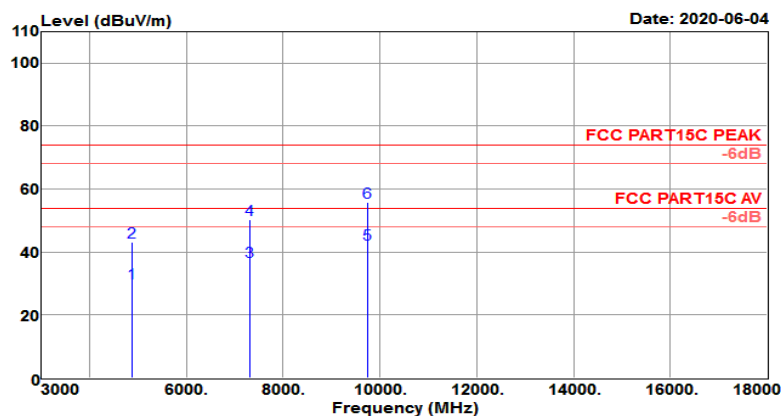


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	51.32	31.02	6.08	58.17	30.25	54.00	-23.75	Average
4874.000	64.20	31.02	6.08	58.17	43.13	74.00	-30.87	Peak
7311.000	50.60	35.65	9.20	58.56	36.89	54.00	-17.11	Average
7311.000	63.86	35.65	9.20	58.56	50.15	74.00	-23.85	Peak
9748.000	49.63	38.50	12.48	57.96	42.65	54.00	-11.35	Average
9748.000	62.78	38.50	12.48	57.96	55.80	74.00	-18.20	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

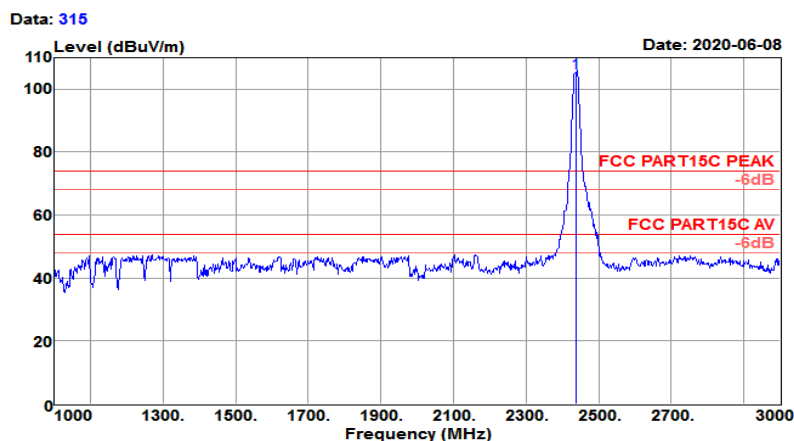

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	109.66	27.66	3.78	35.90	105.20	74.00	31.20	Peak


Test Mode :	802.11g CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

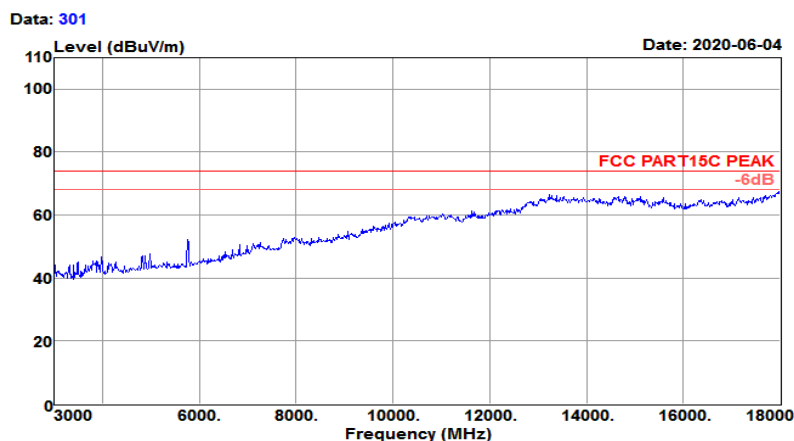

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 302

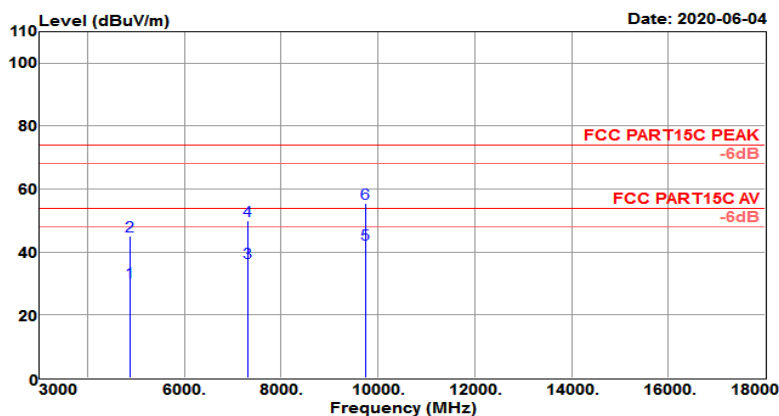


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	51.56	31.02	6.08	58.17	30.49	54.00	-23.51	Average
4874.000	66.26	31.02	6.08	58.17	45.19	74.00	-28.81	Peak
7311.000	50.55	35.65	9.20	58.56	36.84	54.00	-17.16	Average
7311.000	63.63	35.65	9.20	58.56	49.92	74.00	-24.08	Peak
9748.000	49.52	38.50	12.48	57.96	42.54	54.00	-11.46	Average
9748.000	62.50	38.50	12.48	57.96	55.52	74.00	-18.48	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

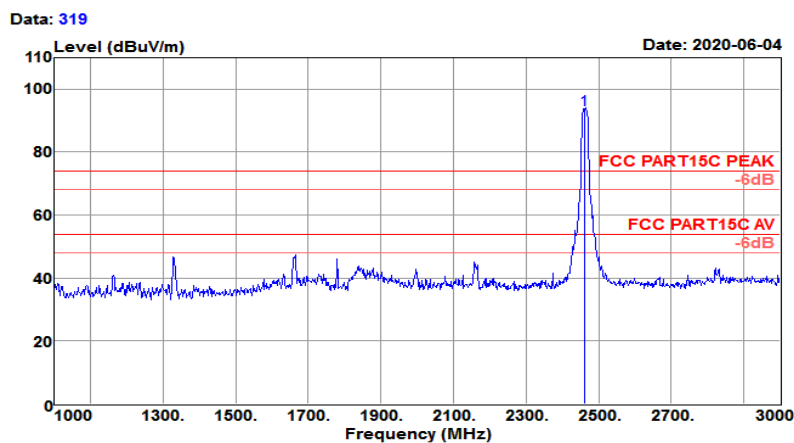

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	97.51	27.72	4.24	35.95	93.52	74.00	19.52	Peak

Test Mode :	802.11g CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber

Temp/Humi : 25℃/64%

Tested by : Jack

Pol/Phase : HORIZONTAL


Test Mode : 802.11g CH11(2462MHz)

Power rating: 120VAc

EUT : Librem Mini


Model No. : LMV1-01

Data: 305

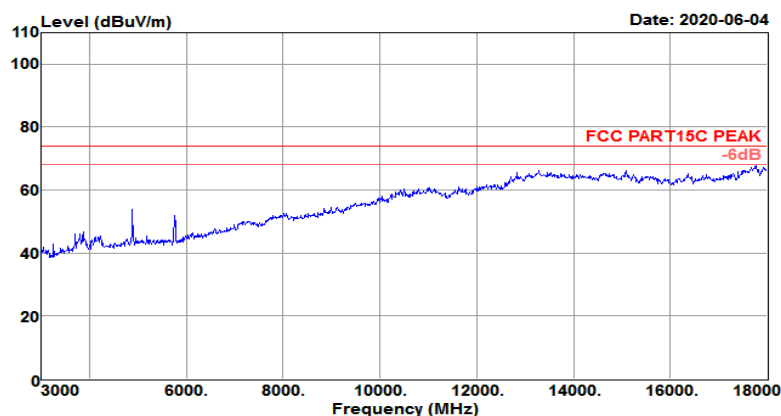

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 306

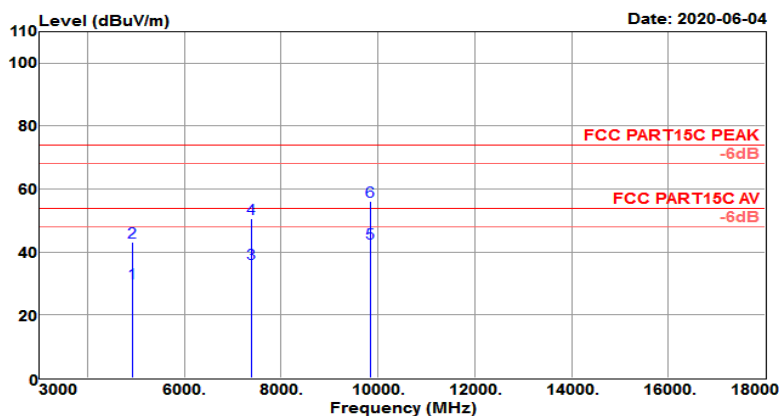


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	50.99	31.09	6.08	58.11	30.05	54.00	-23.95	Average
4924.000	64.01	31.09	6.08	58.11	43.07	74.00	-30.93	Peak
7386.000	50.03	35.83	9.18	58.59	36.45	54.00	-17.55	Average
7386.000	64.28	35.83	9.18	58.59	50.70	74.00	-23.30	Peak
9848.000	49.25	38.58	12.83	57.89	42.77	54.00	-11.23	Average
9848.000	62.53	38.58	12.83	57.89	56.05	74.00	-17.95	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11g CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

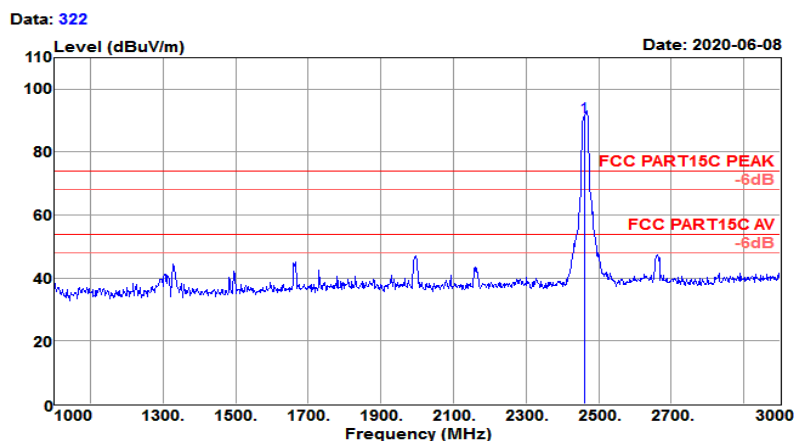

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	95.77	27.72	3.79	35.95	91.33	74.00	17.33	Peak


Test Mode :	802.11g CH11 (2462MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

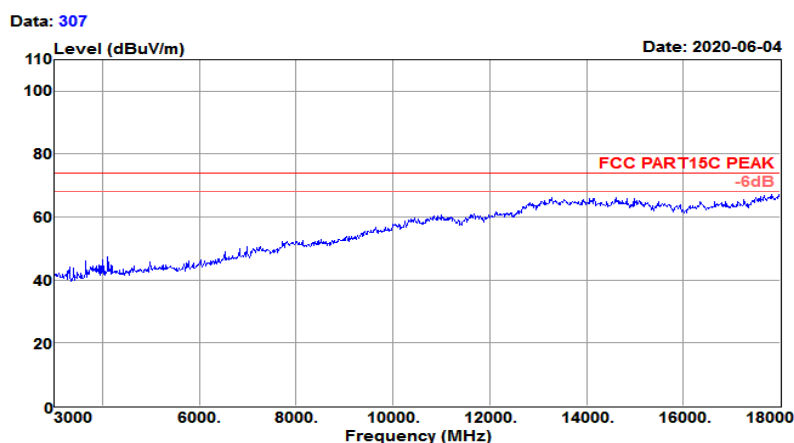

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11g CH11(2462MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 308

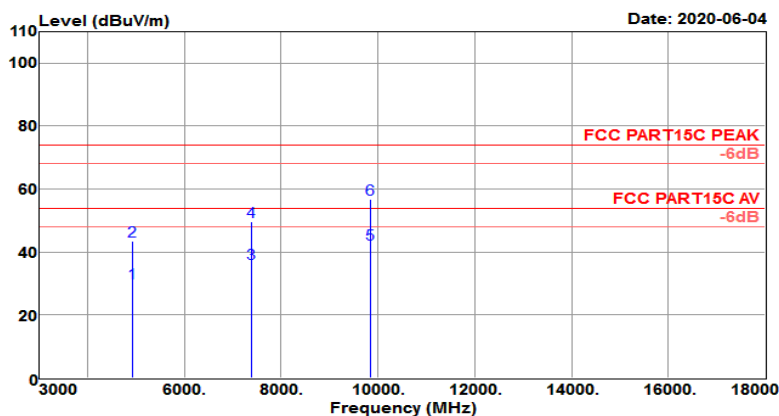


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	51.16	31.09	6.08	58.11	30.22	54.00	-23.78	Average
4924.000	64.54	31.09	6.08	58.11	43.60	74.00	-30.40	Peak
7386.000	50.02	35.83	9.18	58.59	36.44	54.00	-17.56	Average
7386.000	63.11	35.83	9.18	58.59	49.53	74.00	-24.47	Peak
9848.000	49.14	38.58	12.83	57.89	42.66	54.00	-11.34	Average
9848.000	63.19	38.58	12.83	57.89	56.71	74.00	-17.29	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

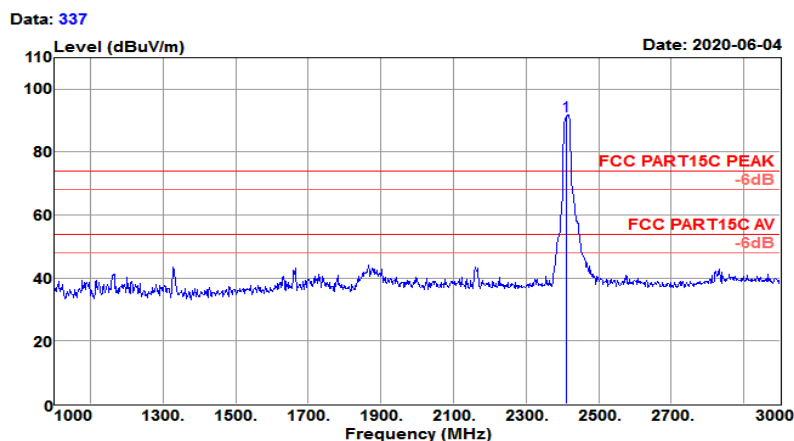

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	95.58	27.61	4.20	35.84	91.55	74.00	17.55	Peak


Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

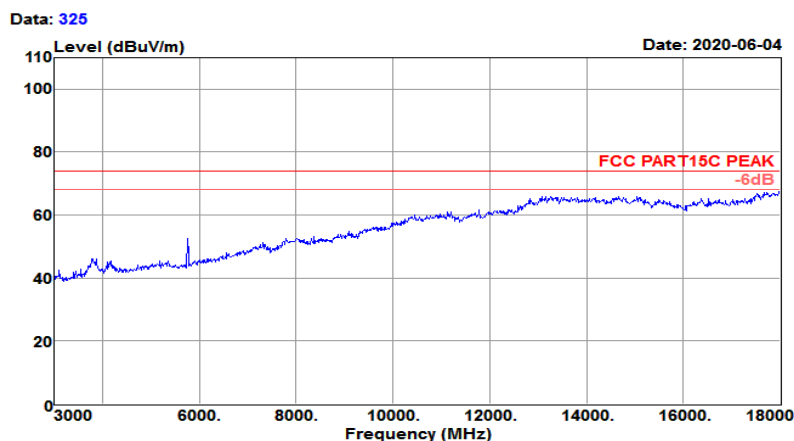

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 326

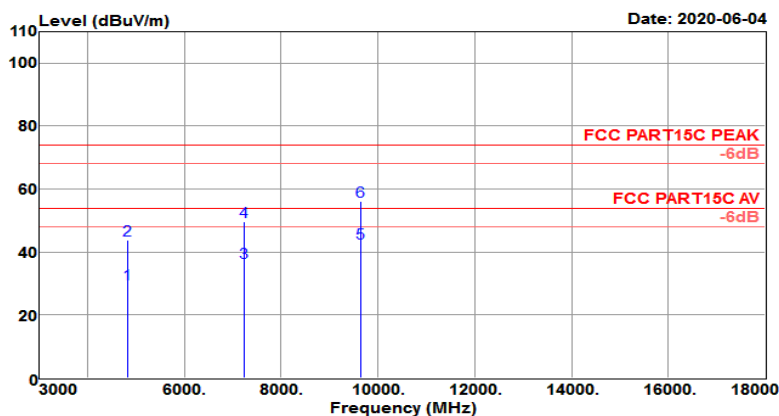


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	51.08	30.95	6.09	58.24	29.88	54.00	-24.12	Average
4824.000	64.94	30.95	6.09	58.24	43.74	74.00	-30.26	Peak
7236.000	50.59	35.47	9.21	58.53	36.74	54.00	-17.26	Average
7236.000	63.64	35.47	9.21	58.53	49.79	74.00	-24.21	Peak
9648.000	50.17	38.42	12.32	58.03	42.88	54.00	-11.12	Average
9648.000	63.44	38.42	12.32	58.03	56.15	74.00	-17.85	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

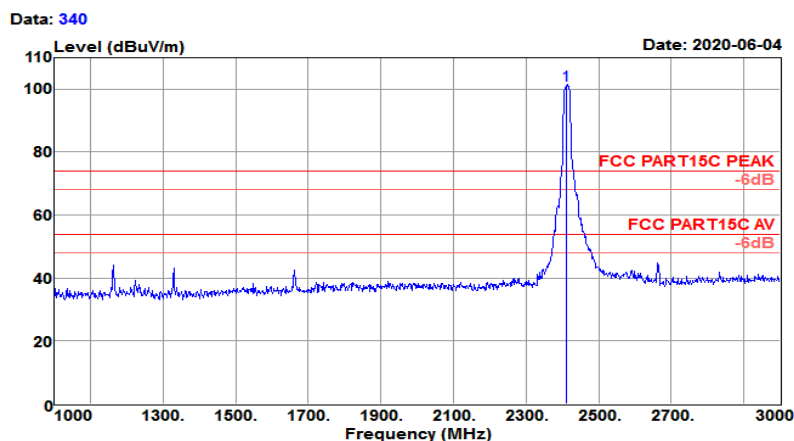

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2412.000	105.13	27.61	4.20	35.84	101.10	74.00	27.10	Peak


Test Mode :	802.11n HT20 CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

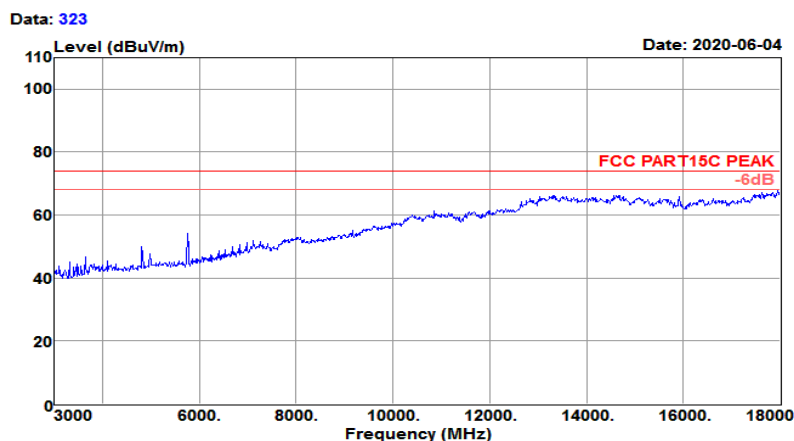

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH01(2412MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 324

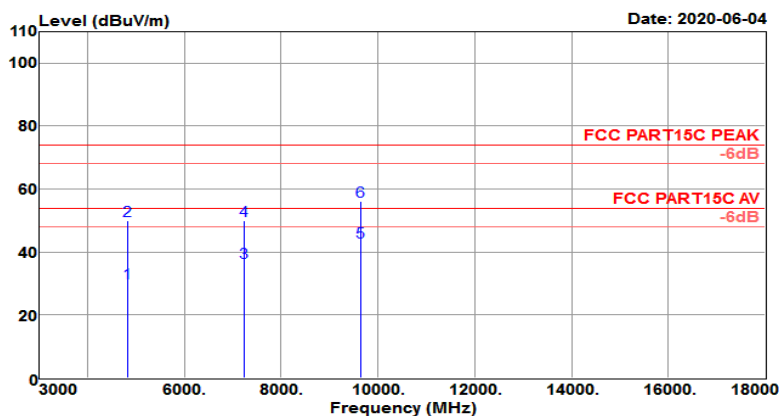


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4824.000	51.53	30.95	6.09	58.24	30.33	54.00	-23.67	Average
4824.000	71.09	30.95	6.09	58.24	49.89	74.00	-24.11	Peak
7236.000	50.63	35.47	9.21	58.53	36.78	54.00	-17.22	Average
7236.000	63.85	35.47	9.21	58.53	50.00	74.00	-24.00	Peak
9648.000	50.37	38.42	12.32	58.03	43.08	54.00	-10.92	Average
9648.000	63.59	38.42	12.32	58.03	56.30	74.00	-17.70	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

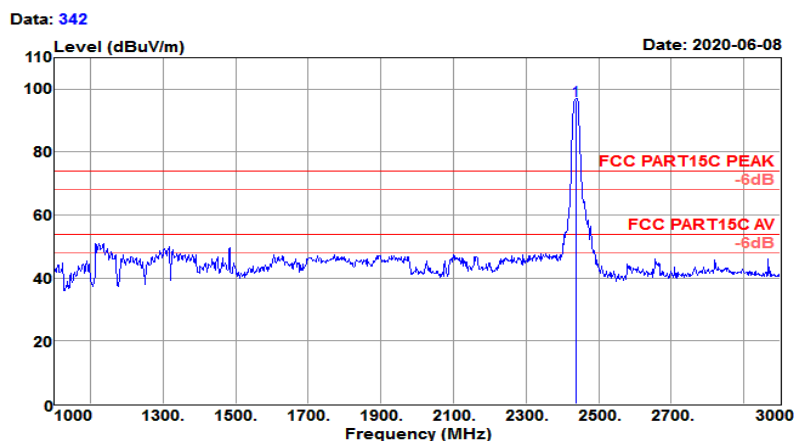

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	100.79	27.66	3.78	35.90	96.33	74.00	22.33	Peak


Test Mode :	802.11n HT20 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

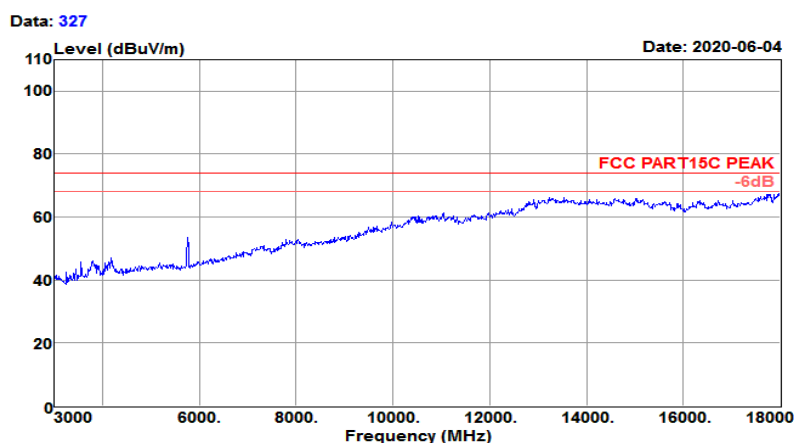

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 328

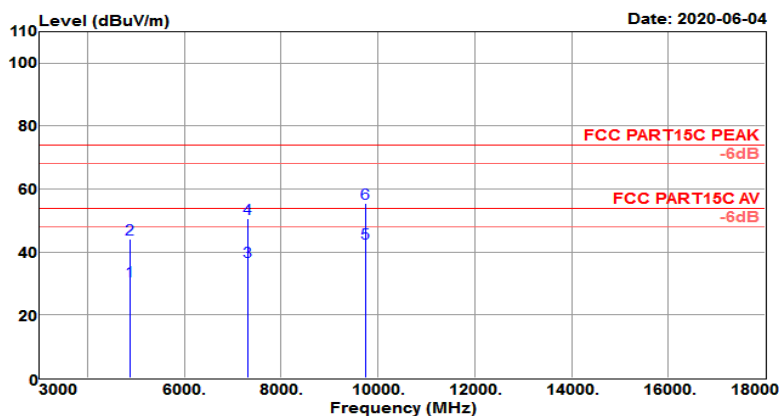


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	51.85	31.02	6.08	58.17	30.78	54.00	-23.22	Average
4874.000	65.17	31.02	6.08	58.17	44.10	74.00	-29.90	Peak
7311.000	50.84	35.65	9.20	58.56	37.13	54.00	-16.87	Average
7311.000	64.20	35.65	9.20	58.56	50.49	74.00	-23.51	Peak
9748.000	49.79	38.50	12.48	57.96	42.81	54.00	-11.19	Average
9748.000	62.55	38.50	12.48	57.96	55.57	74.00	-18.43	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

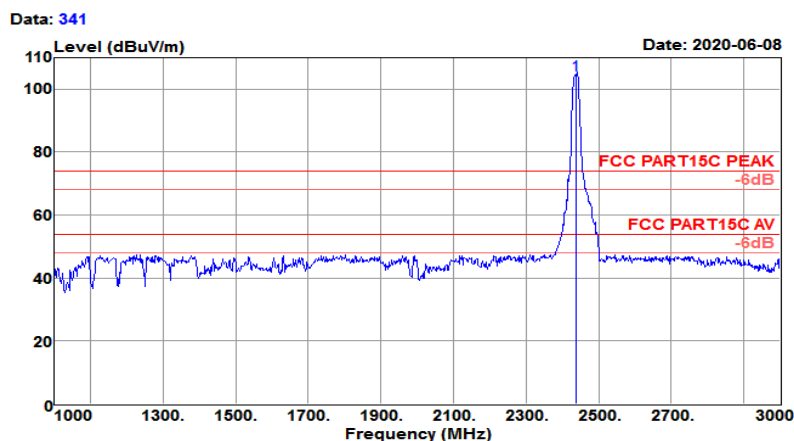

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	109.07	27.66	3.78	35.90	104.61	74.00	30.61	Peak


Test Mode :	802.11n HT20 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

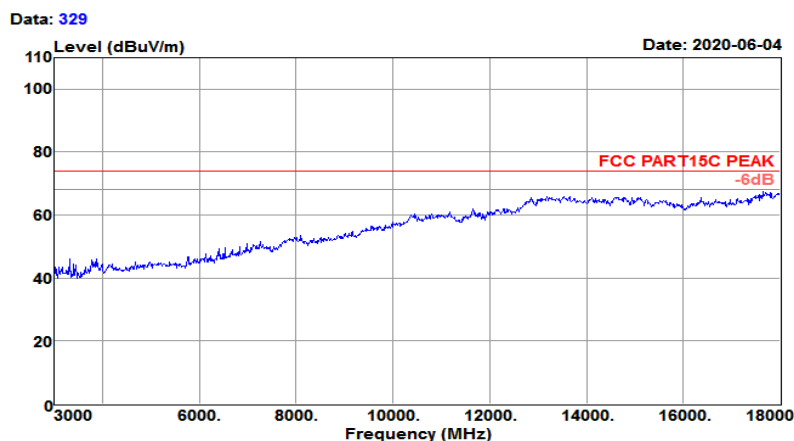

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 330

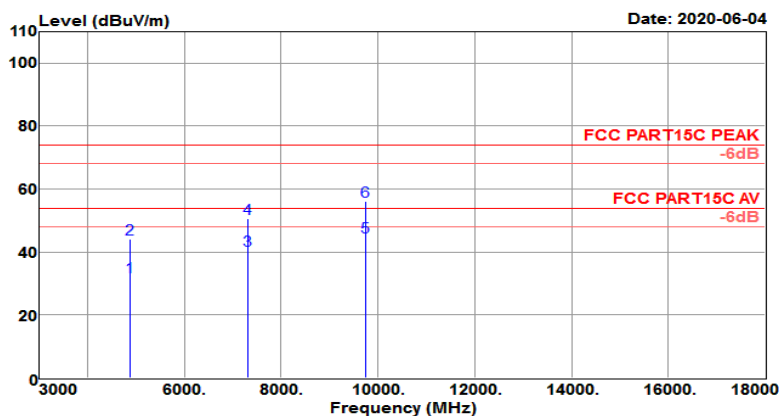


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	53.19	31.02	6.08	58.17	32.12	54.00	-21.88	Average
4874.000	65.15	31.02	6.08	58.17	44.08	74.00	-29.92	Peak
7311.000	54.13	35.65	9.20	58.56	40.42	54.00	-13.58	Average
7311.000	64.30	35.65	9.20	58.56	50.59	74.00	-23.41	Peak
9748.000	51.71	38.50	12.48	57.96	44.73	54.00	-9.27	Average
9748.000	63.00	38.50	12.48	57.96	56.02	74.00	-17.98	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

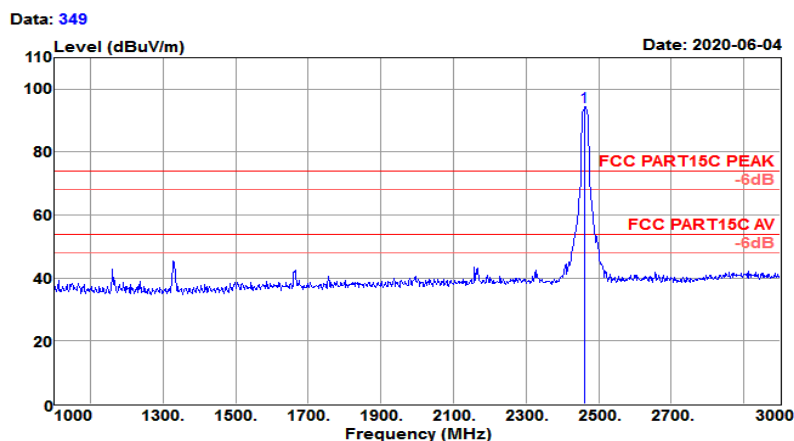

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	98.39	27.72	4.24	35.95	94.40	74.00	20.40	Peak


Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

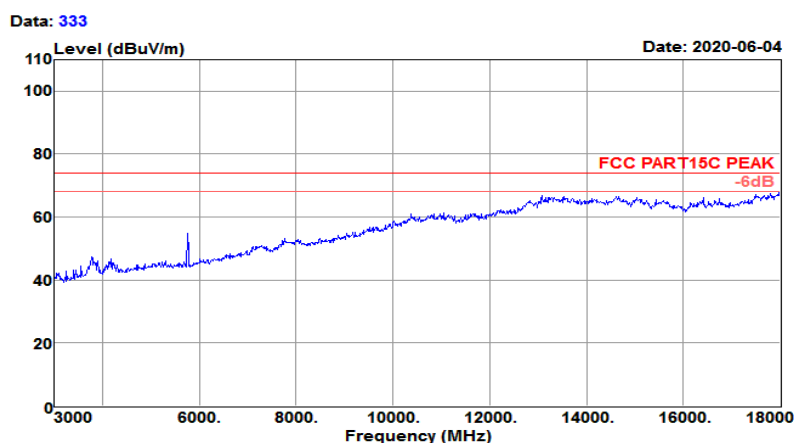

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 334

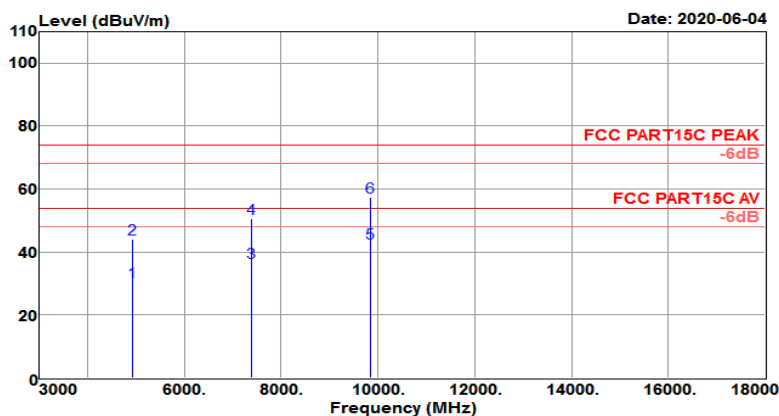


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	51.41	31.09	6.08	58.11	30.47	54.00	-23.53	Average
4924.000	65.05	31.09	6.08	58.11	44.11	74.00	-29.89	Peak
7386.000	50.26	35.83	9.18	58.59	36.68	54.00	-17.32	Average
7386.000	64.37	35.83	9.18	58.59	50.79	74.00	-23.21	Peak
9848.000	49.42	38.58	12.83	57.89	42.94	54.00	-11.06	Average
9848.000	63.87	38.58	12.83	57.89	57.39	74.00	-16.61	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

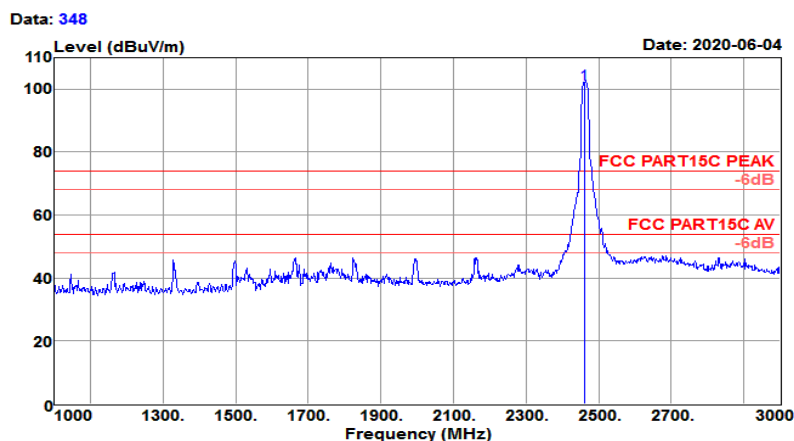

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.000	105.50	27.72	4.24	35.95	101.51	74.00	27.51	Peak


Test Mode :	802.11n HT20 CH11 (2462 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

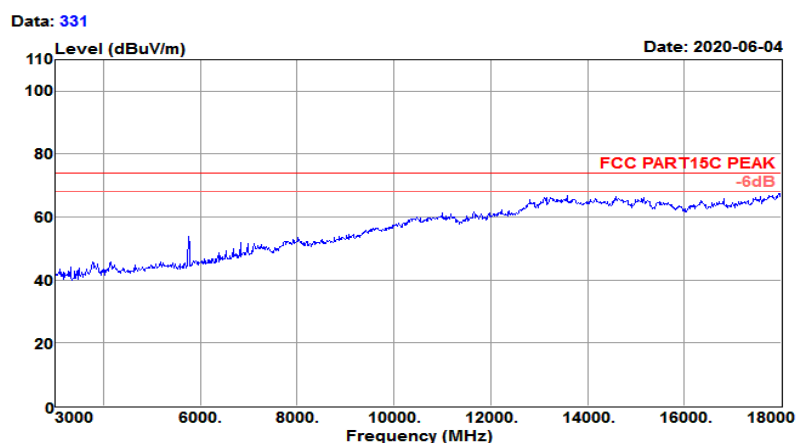

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT20 CH11(2462MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMv1-01		

Data: 332

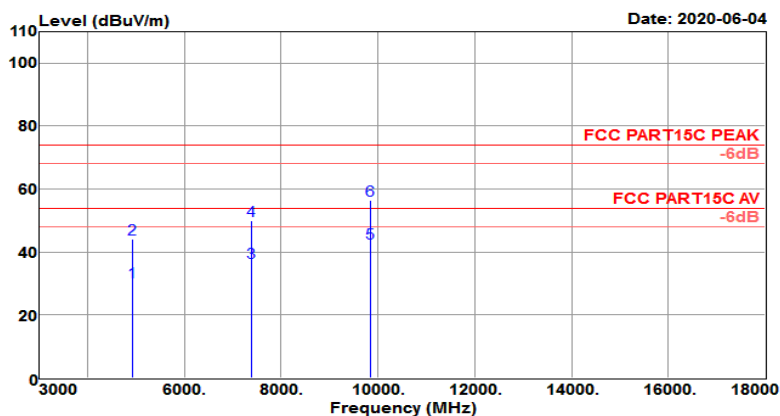


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4924.000	51.52	31.09	6.08	58.11	30.58	54.00	-23.42	Average
4924.000	65.10	31.09	6.08	58.11	44.16	74.00	-29.84	Peak
7386.000	50.16	35.83	9.18	58.59	36.58	54.00	-17.42	Average
7386.000	63.50	35.83	9.18	58.59	49.92	74.00	-24.08	Peak
9848.000	49.28	38.58	12.83	57.89	42.80	54.00	-11.20	Average
9848.000	62.96	38.58	12.83	57.89	56.48	74.00	-17.52	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

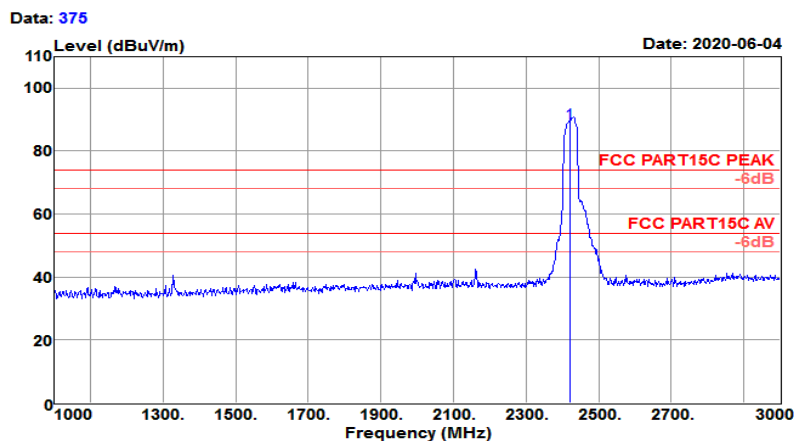

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2422.000	92.94	27.63	4.21	35.86	88.92	74.00	14.92	Peak


Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

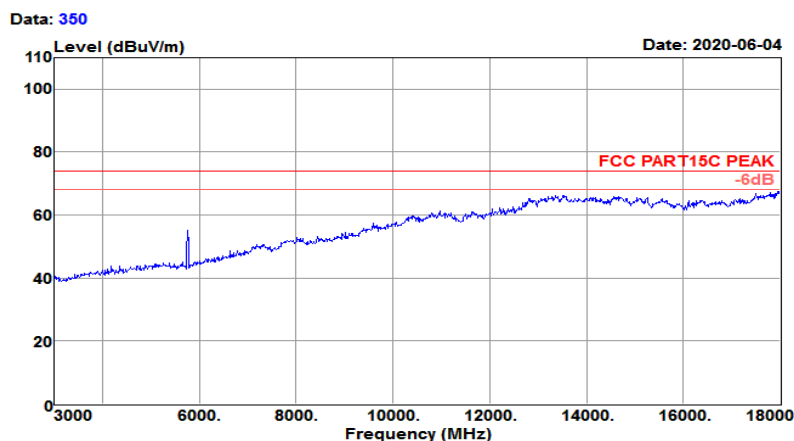

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 351

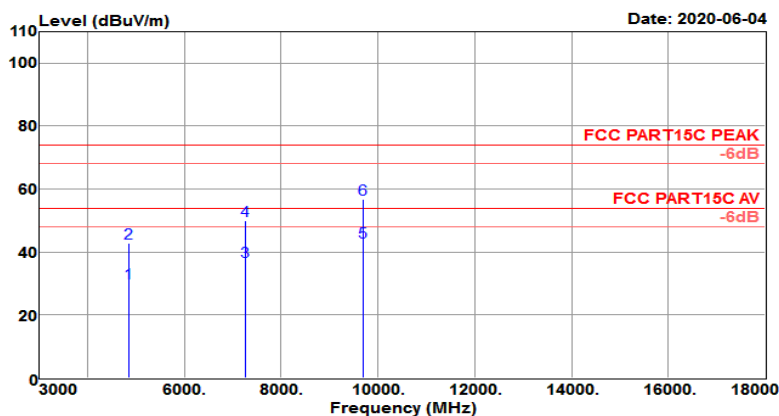


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4844.000	51.29	30.98	6.09	58.21	30.15	54.00	-23.85	Average
4844.000	64.04	30.98	6.09	58.21	42.90	74.00	-31.10	Peak
7266.000	50.90	35.54	9.21	58.54	37.11	54.00	-16.89	Average
7266.000	63.84	35.54	9.21	58.54	50.05	74.00	-23.95	Peak
9688.000	50.17	38.45	12.39	58.00	43.01	54.00	-10.99	Average
9688.000	63.88	38.45	12.39	58.00	56.72	74.00	-17.28	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

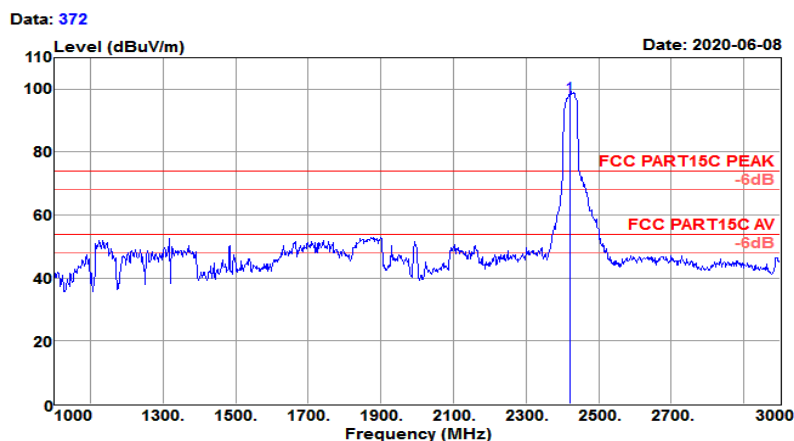

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2422.000	102.03	27.63	3.77	35.86	97.57	74.00	23.57	Peak


Test Mode :	802.11n HT40 CH03 (2422 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

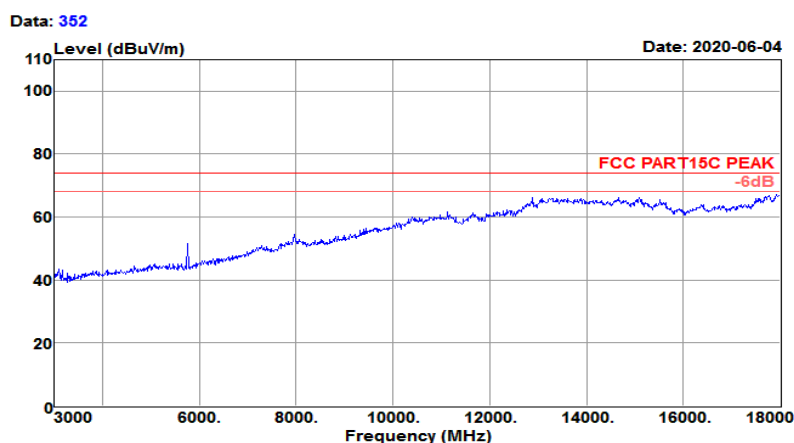

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH03(2422MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 353

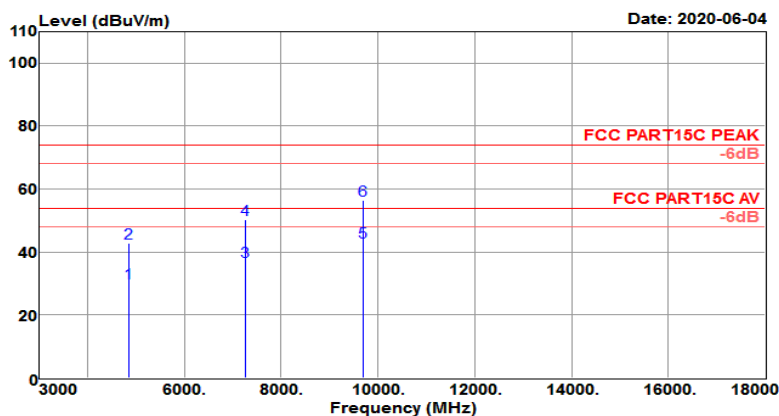


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4844.000	51.43	30.98	6.09	58.21	30.29	54.00	-23.71	Average
4844.000	64.12	30.98	6.09	58.21	42.98	74.00	-31.02	Peak
7266.000	50.83	35.54	9.21	58.54	37.04	54.00	-16.96	Average
7266.000	64.01	35.54	9.21	58.54	50.22	74.00	-23.78	Peak
9688.000	50.17	38.45	12.39	58.00	43.01	54.00	-10.99	Average
9688.000	63.67	38.45	12.39	58.00	56.51	74.00	-17.49	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

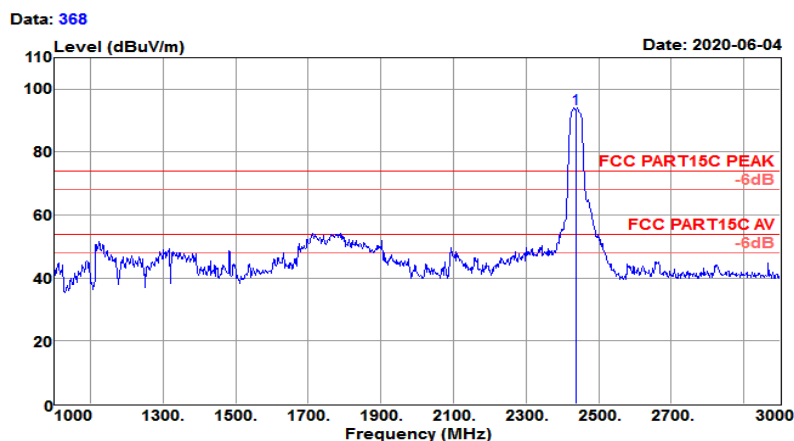

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	97.93	27.66	4.22	35.90	93.91	74.00	19.91	Peak


Test Mode :	802.11n HT40 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

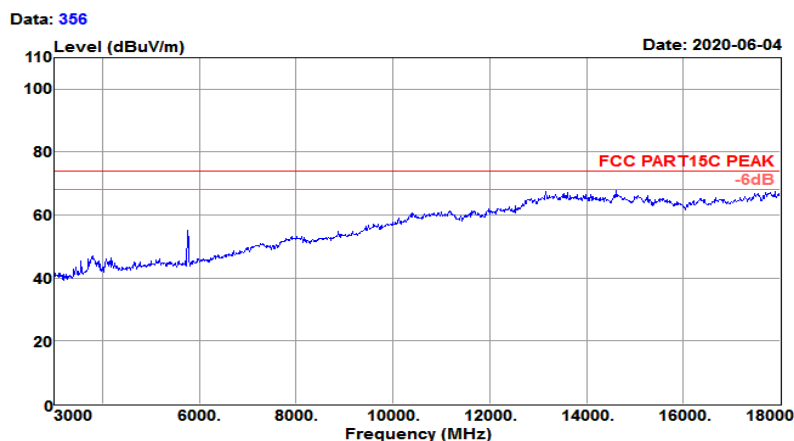

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH06(2437MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 357

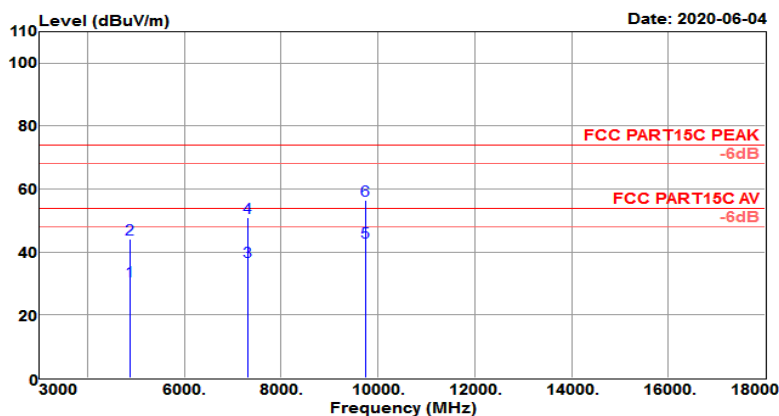


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	52.01	31.02	6.08	58.17	30.94	54.00	-23.06	Average
4874.000	65.30	31.02	6.08	58.17	44.23	74.00	-29.77	Peak
7311.000	50.85	35.65	9.20	58.56	37.14	54.00	-16.86	Average
7311.000	64.70	35.65	9.20	58.56	50.99	74.00	-23.01	Peak
9748.000	50.02	38.50	12.48	57.96	43.04	54.00	-10.96	Average
9748.000	63.35	38.50	12.48	57.96	56.37	74.00	-17.63	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 25℃/64%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11N HT40 CH06(2437MHz)
 Power rating: 120VAc
 EUT : Librem Mini
 Model No. : LMV1-01

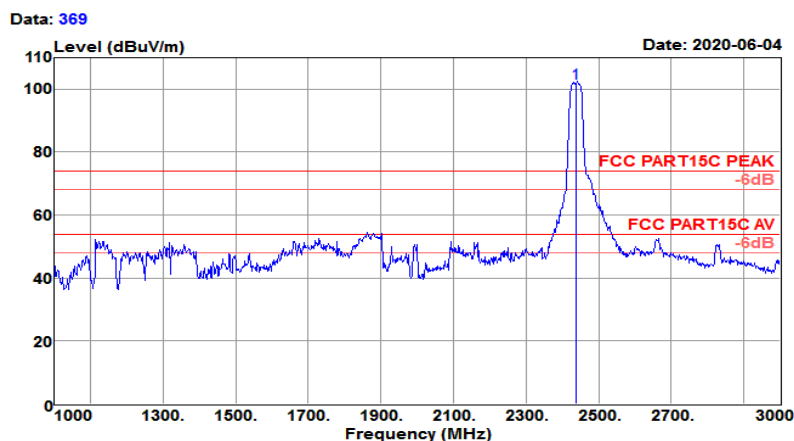

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2437.000	106.04	27.66	4.22	35.90	102.02	74.00	28.02	Peak


Test Mode :	802.11n HT40 CH06 (2437MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH06(2437MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

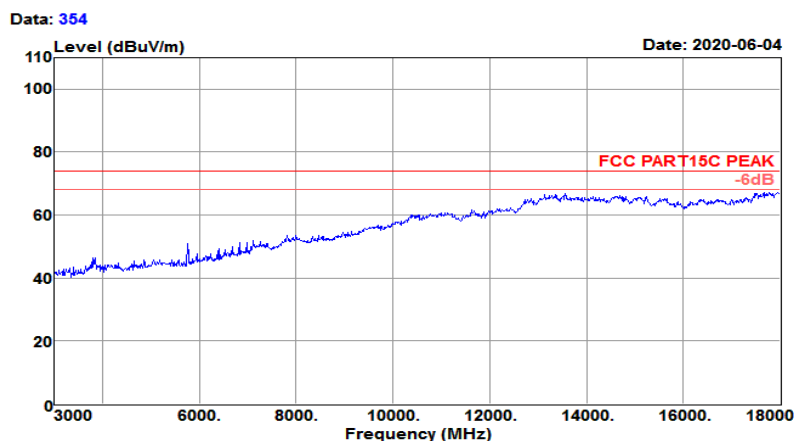

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH06(2437MHz)	Power rating:	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 355

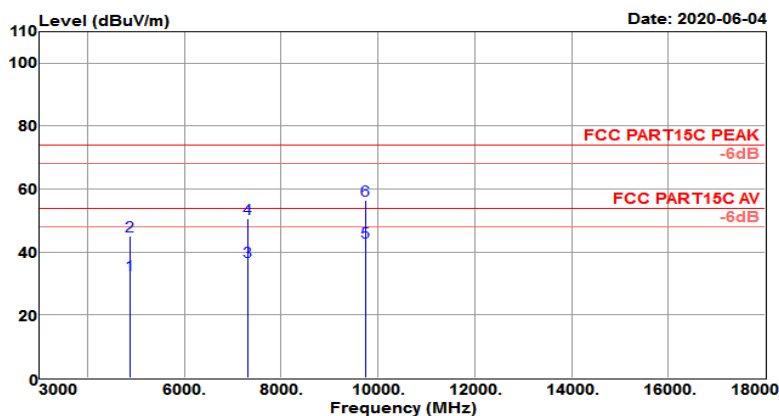


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4874.000	53.93	31.02	6.08	58.17	32.86	54.00	-21.14	Average
4874.000	66.17	31.02	6.08	58.17	45.10	74.00	-28.90	Peak
7311.000	50.88	35.65	9.20	58.56	37.17	54.00	-16.83	Average
7311.000	64.25	35.65	9.20	58.56	50.54	74.00	-23.46	Peak
9748.000	50.03	38.50	12.48	57.96	43.05	54.00	-10.95	Average
9748.000	63.59	38.50	12.48	57.96	56.61	74.00	-17.39	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH09(2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating:	120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

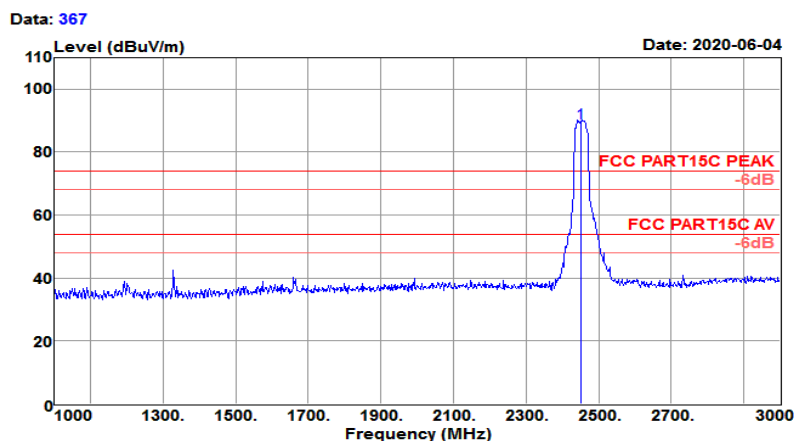

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2452.000	93.24	27.69	4.23	35.93	89.23	74.00	15.23	Peak


Test Mode :	802.11n HT40 CH09(2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

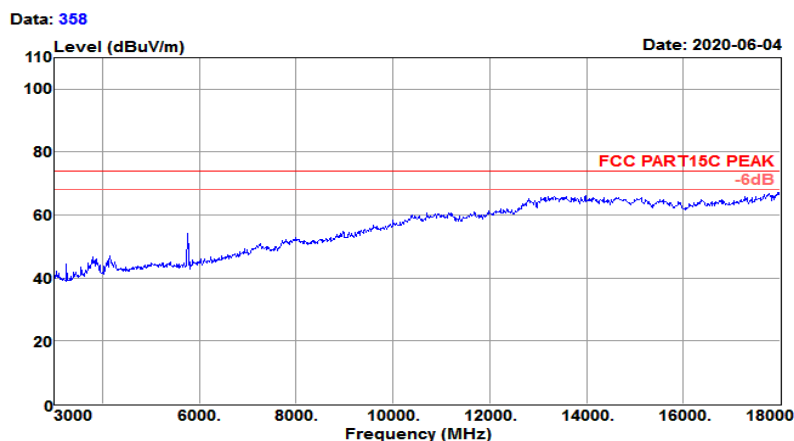

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

Data: 359

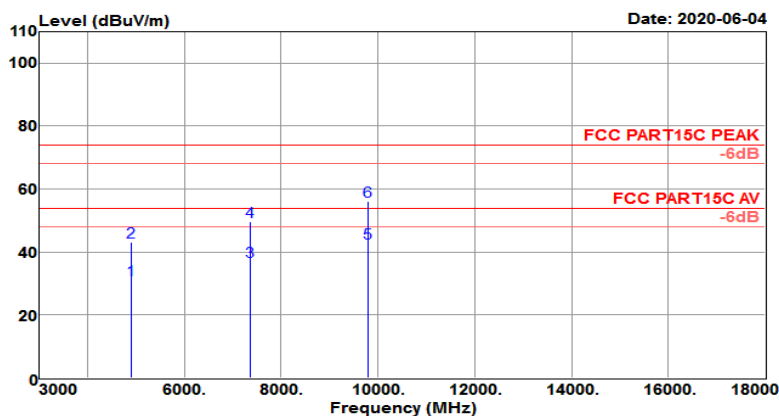


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4904.000	52.03	31.07	6.08	58.13	31.05	54.00	-22.95	Average
4904.000	64.05	31.07	6.08	58.13	43.07	74.00	-30.93	Peak
7356.000	50.60	35.75	9.19	58.58	36.96	54.00	-17.04	Average
7356.000	63.39	35.75	9.19	58.58	49.75	74.00	-24.25	Peak
9808.000	49.69	38.55	12.61	57.92	42.93	54.00	-11.07	Average
9808.000	62.79	38.55	12.61	57.92	56.03	74.00	-17.97	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT40 CH09(2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMV1-01		

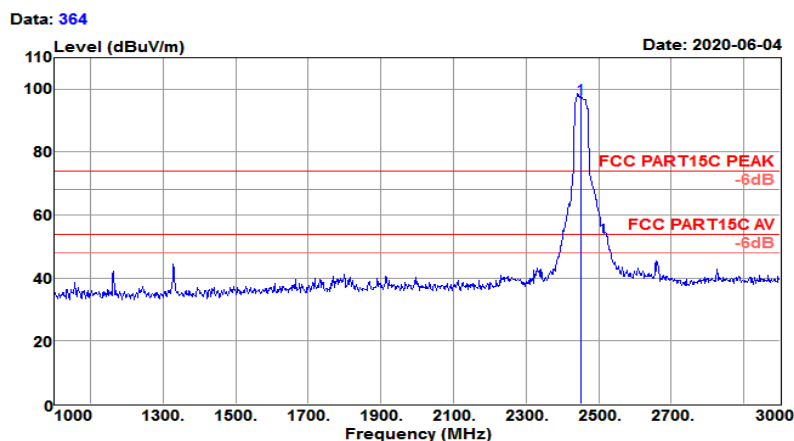

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2452.000	101.01	27.69	4.23	35.93	97.00	74.00	23.00	Peak


Test Mode :	802.11n HT40 CH09(2452 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating:	120Vac
EUT	: Librem Mini		
Model No.	: LMV1-01		

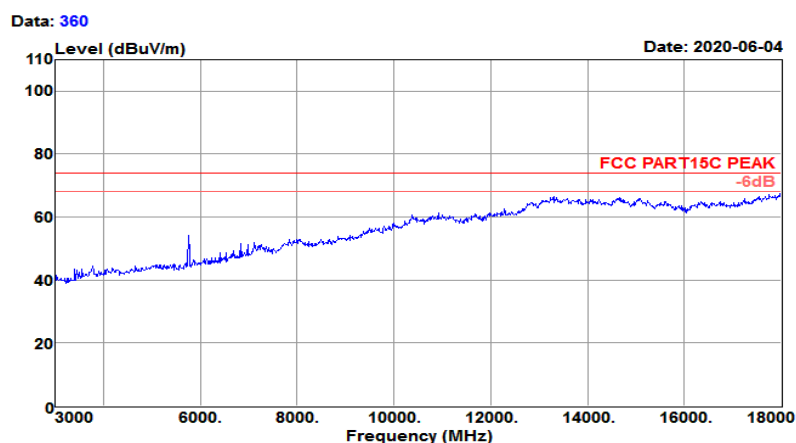

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11N HT40 CH09(2452MHz)	Power rating:	: 120VAc
EUT	: Librem Mini		
Model No.	: LMv1-01		

Data: 361

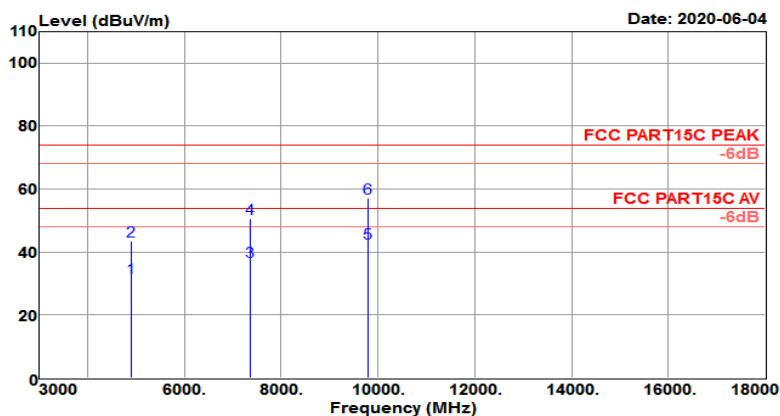


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4904.000	52.91	31.07	6.08	58.13	31.93	54.00	-22.07	Average
4904.000	64.32	31.07	6.08	58.13	43.34	74.00	-30.66	Peak
7356.000	50.57	35.75	9.19	58.58	36.93	54.00	-17.07	Average
7356.000	64.33	35.75	9.19	58.58	50.69	74.00	-23.31	Peak
9808.000	49.65	38.55	12.61	57.92	42.89	54.00	-11.11	Average
9808.000	63.78	38.55	12.61	57.92	57.02	74.00	-16.98	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

4.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating	: 120VAC
EUT	: Librem Mini		
Model No.	: LMV1-01		

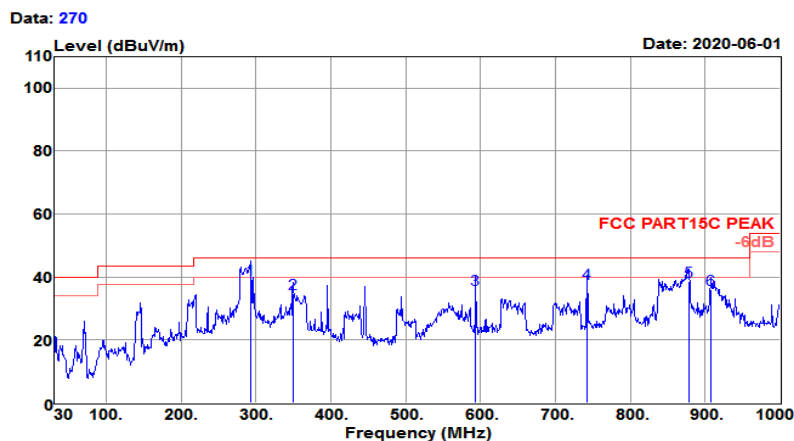

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
292.870	54.31	14.04	3.35	32.49	39.21	46.00	-6.79	QP
349.130	48.94	14.79	3.68	32.52	34.89	46.00	-11.11	QP
593.570	43.92	19.88	4.85	32.69	35.96	46.00	-10.04	QP
741.980	42.85	22.04	5.52	32.50	37.91	46.00	-8.09	QP
878.750	41.67	23.20	6.03	32.22	38.68	46.00	-7.32	QP
906.880	38.52	23.62	6.12	32.18	36.08	46.00	-9.92	QP

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating	: 120Wac
EUT	: Librem Mini		
Model No.	: LMV1-01		

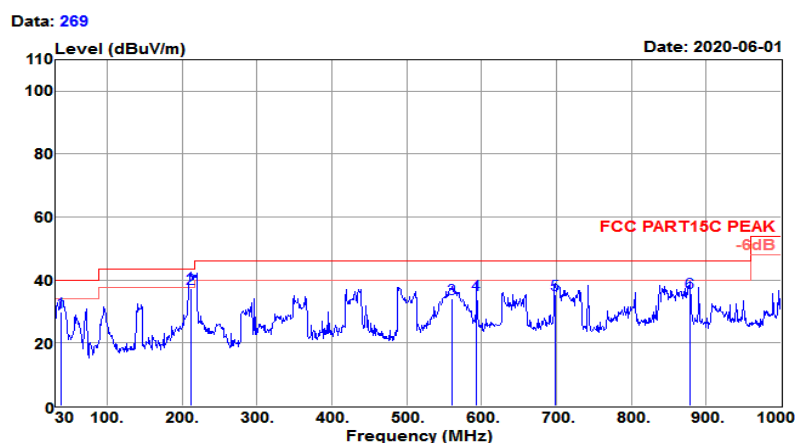

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
37.760	48.81	12.41	1.20	32.47	29.95	40.00	-10.05	QP
212.360	55.70	11.22	2.82	32.47	37.27	43.50	-6.23	QP
560.590	42.68	19.29	4.73	32.67	34.03	46.00	-11.97	QP
593.570	43.28	19.88	4.85	32.69	35.32	46.00	-10.68	QP
698.330	41.62	21.18	5.24	32.64	35.40	46.00	-10.60	QP
877.780	38.93	23.19	6.02	32.22	35.92	46.00	-10.08	QP

4.6 AC Conducted Emission Measurement

4.6.1 Limit of AC Conducted Emission

FCC §15.207

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.

4.6.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.3 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	20°C
Test Engineer :	Jack Liu	Relative Humidity :	64%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	2.4G WLAN Link + HDMI + Earphone + Burnin test + ping		

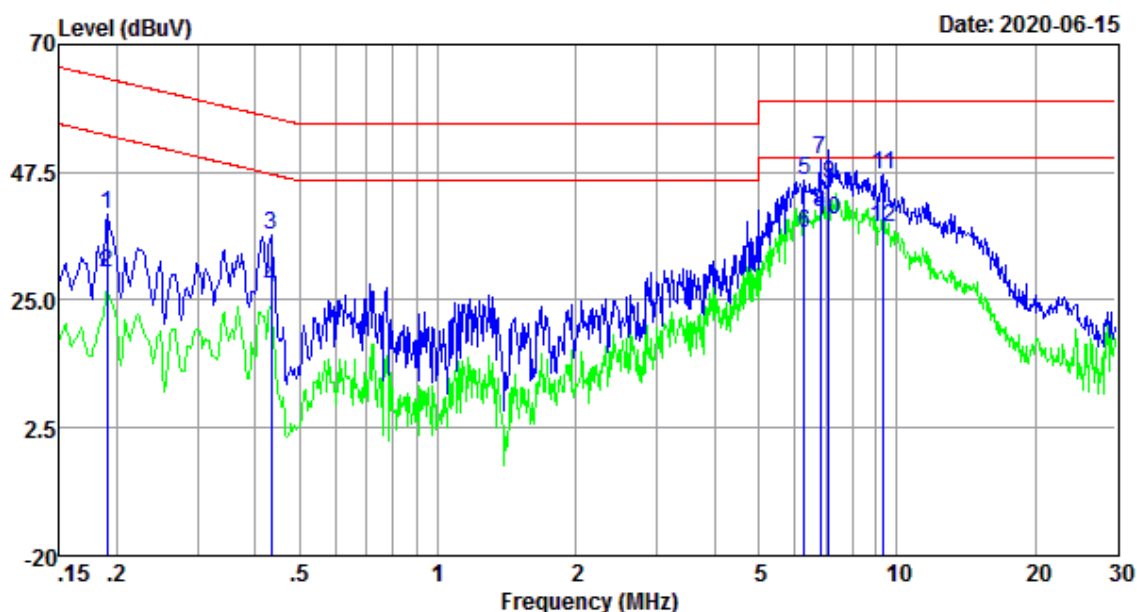

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.190	30.62	9.55	0.03	40.20	64.02	-23.82	QP
0.190	20.13	9.55	0.03	29.71	54.02	-24.31	Average
0.433	26.99	9.56	0.02	36.57	57.20	-20.63	QP
0.433	17.53	9.56	0.02	27.11	47.20	-20.09	Average
6.285	36.31	9.71	0.05	46.07	60.00	-13.93	QP
6.285	27.02	9.71	0.05	36.78	50.00	-13.22	Average
6.805	39.91	9.73	0.06	49.70	60.00	-10.30	QP
6.805	30.72	9.73	0.06	40.51	50.00	-9.49	Average
7.100	35.51	9.74	0.06	45.31	60.00	-14.69	QP
7.100	29.31	9.74	0.06	39.11	50.00	-10.89	Average
9.352	37.15	9.83	0.08	47.06	60.00	-12.94	QP
9.352	27.86	9.83	0.08	37.77	50.00	-12.23	Average

Result Level= Reading Level + LISN Factor + Cable Loss

Test Mode :	Mode 1	Temperature :	20°C
Test Engineer :	Jack Liu	Relative Humidity :	64%
Test Voltage :	120Vac / 60Hz	Phase :	NEUTRAL
Function Type :	2.4G WLAN Link + HDMI + Earphone + Burnin test + ping		

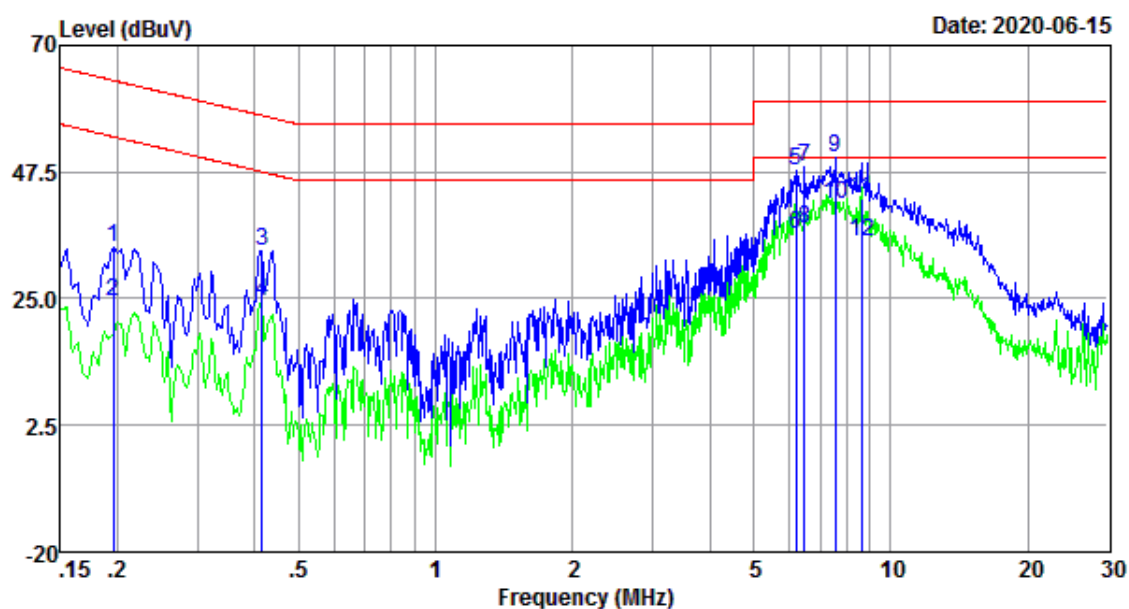

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.195	24.66	9.56	0.03	34.25	63.80	-29.55	QP
0.195	14.77	9.56	0.03	24.36	53.80	-29.44	Average
0.415	23.87	9.58	0.02	33.47	57.55	-24.08	QP
0.415	14.92	9.58	0.02	24.52	47.55	-23.03	Average
6.186	37.92	9.78	0.05	47.75	60.00	-12.25	QP
6.186	26.55	9.78	0.05	36.38	50.00	-13.62	Average
6.454	38.59	9.79	0.06	48.44	60.00	-11.56	QP
6.454	27.62	9.79	0.06	37.47	50.00	-12.53	Average
7.566	40.17	9.84	0.07	50.08	60.00	-9.92	QP
7.566	31.85	9.84	0.07	41.76	50.00	-8.24	Average
8.637	32.90	9.88	0.08	42.86	60.00	-17.14	QP
8.637	25.30	9.88	0.08	35.26	50.00	-14.74	Average

Result Level= Reading Level + LISN Factor + Cable Loss

4.7 Antenna Requirements

4.7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 Antenna Connected Construction

An FPC antenna design is used.

4.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2020-01-15	2021-01-14	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2020-01-16	2021-01-15	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2020-05-09	2021-05-08	Conducted
Base Station	R&S	CMW 270	101231	2020-01-16	2021-01-15	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2020-02-21	2021-02-20	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2020-01-15	2021-01-14	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2020-01-16	2021-01-15	Radiation
Amplifier	Sonoma	310	363917	2020-01-15	2021-01-14	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2020-01-15	2021-01-14	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-05-14	2021-05-15	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2018-08-31	2021-08-30	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2020-01-08	2021-01-07	Conducted
LISN	R&S	ENV432	101327	2020-01-08	2021-01-07	Conducted
EMI Test Receiver	R&S	ESR3	102143	2020-01-16	2021-01-15	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.160	2407.400	2416.560	≥ 0.5	PASS
		2437	9.160	2432.400	2441.560	≥ 0.5	PASS
		2462	9.680	2457.000	2466.680	≥ 0.5	PASS
11G	Ant1	2412	13.200	2406.280	2419.480	≥ 0.5	PASS
		2437	13.680	2430.280	2443.960	≥ 0.5	PASS
		2462	14.560	2455.040	2469.600	≥ 0.5	PASS
11N20SISO	Ant1	2412	15.120	2404.440	2419.560	≥ 0.5	PASS
		2437	15.440	2429.080	2444.520	≥ 0.5	PASS
		2462	13.880	2455.680	2469.560	≥ 0.5	PASS
11N40SISO	Ant1	2422	35.120	2404.400	2439.520	≥ 0.5	PASS
		2437	31.400	2420.680	2452.080	≥ 0.5	PASS
		2452	33.880	2435.640	2469.520	≥ 0.5	PASS

Test Graphs

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462



11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437




11N20SISO_Ant1_2462




11N40SISO_Ant1_2422

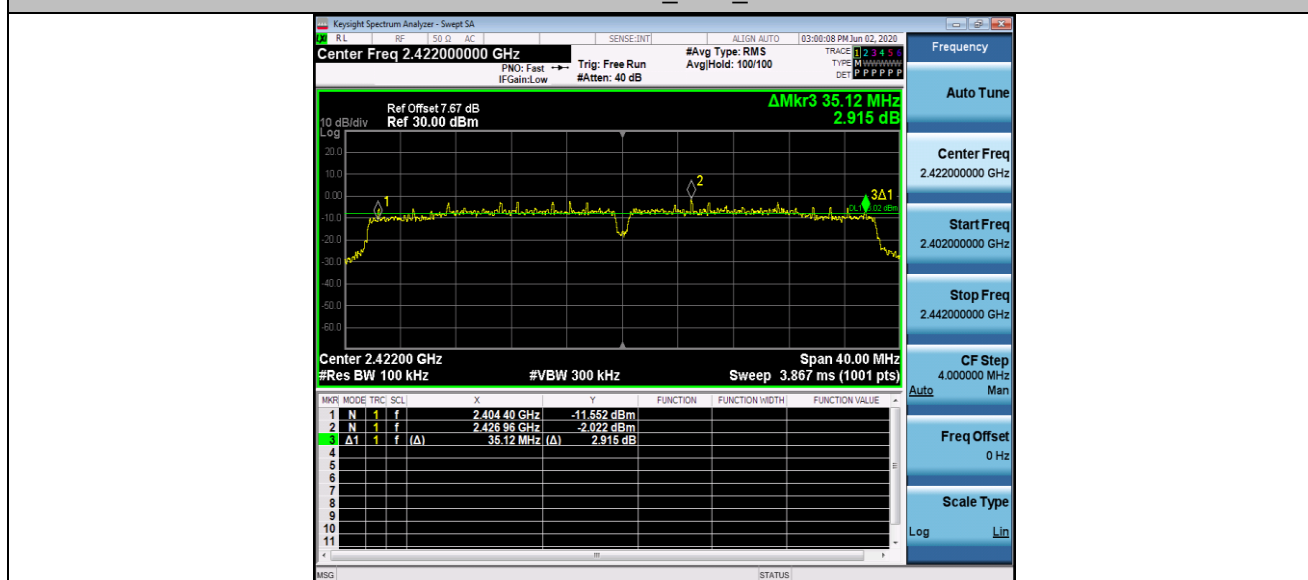

11N40SISO_Ant1_2437

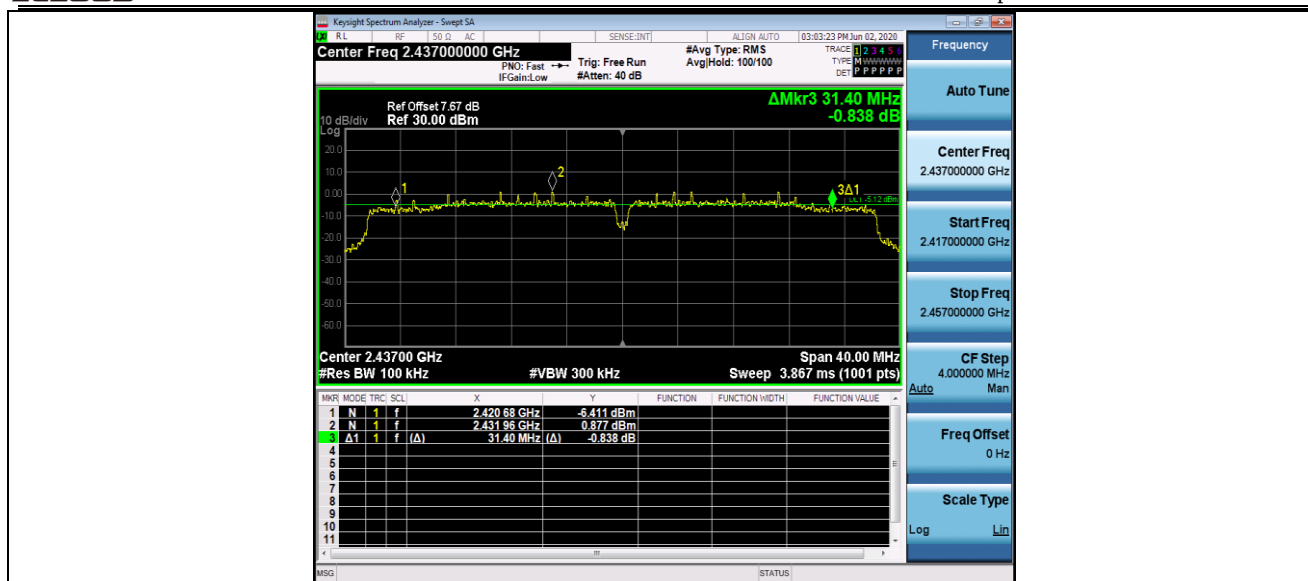

11N40SISO_Ant1_2452

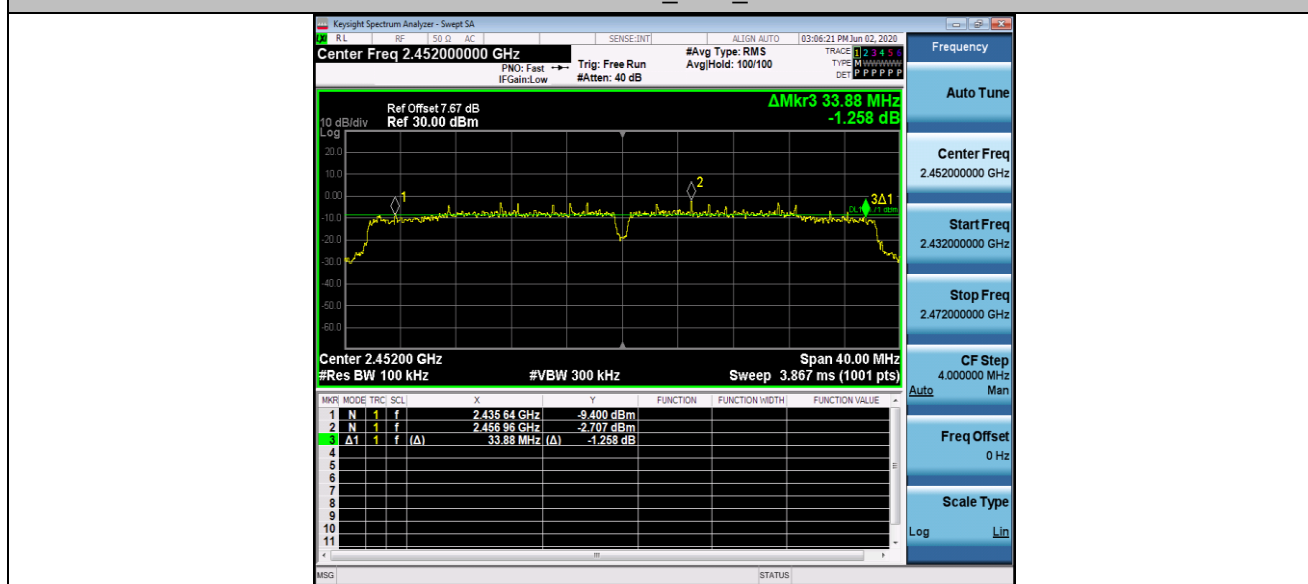


Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.874	2405.601	2418.475	---	PASS
		2437	13.047	2430.525	2443.572	---	PASS
		2462	12.949	2455.558	2468.507	---	PASS
11G	Ant1	2412	16.965	2403.585	2420.550	---	PASS
		2437	17.073	2428.467	2445.540	---	PASS
		2462	17.007	2453.488	2470.495	---	PASS
11N20SISO	Ant1	2412	18.123	2402.971	2421.094	---	PASS
		2437	18.236	2427.929	2446.165	---	PASS
		2462	18.158	2452.936	2471.094	---	PASS
11N40SISO	Ant1	2422	36.034	2404.005	2440.039	---	PASS
		2437	36.047	2419.019	2455.066	---	PASS
		2452	36.093	2433.963	2470.056	---	PASS

Test Graphs


11B_Ant1_2412

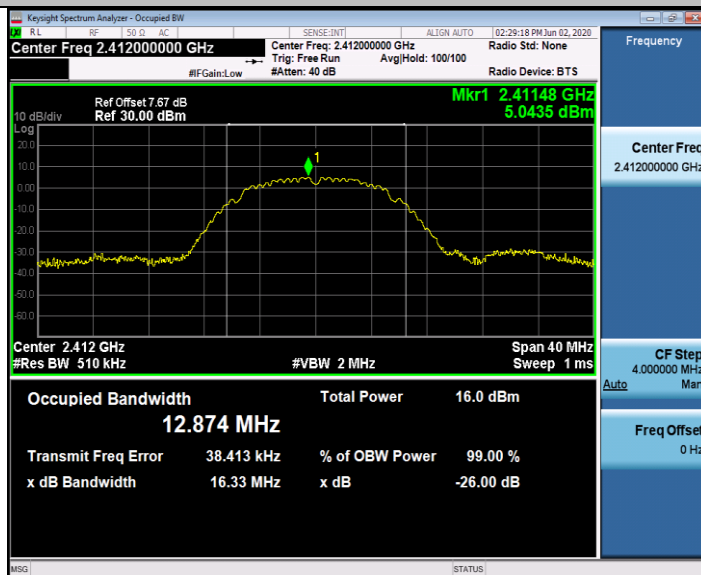


11B_Ant1_2437

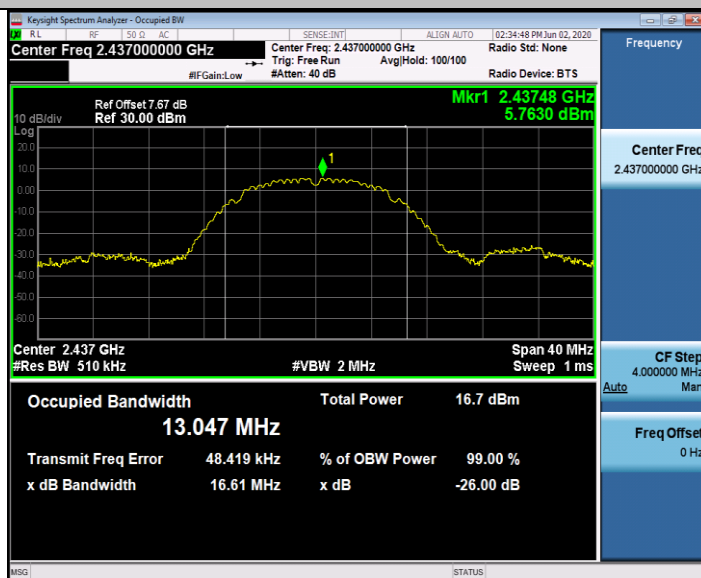


11B_Ant1_2462

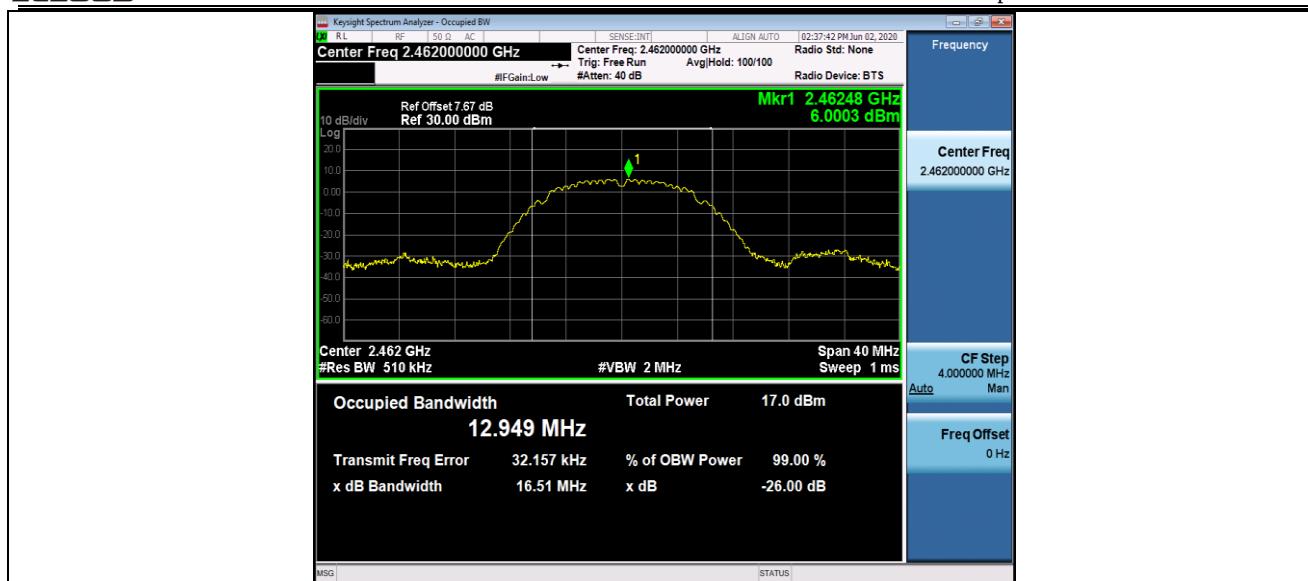

11G_Ant1_2412

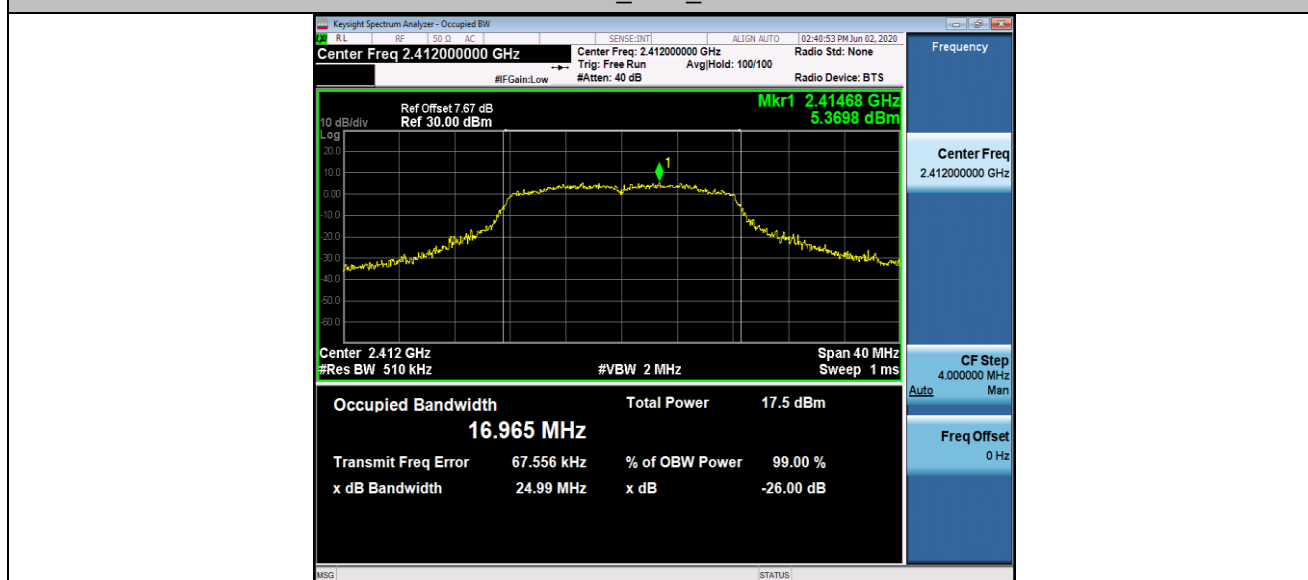

11G_Ant1_2437

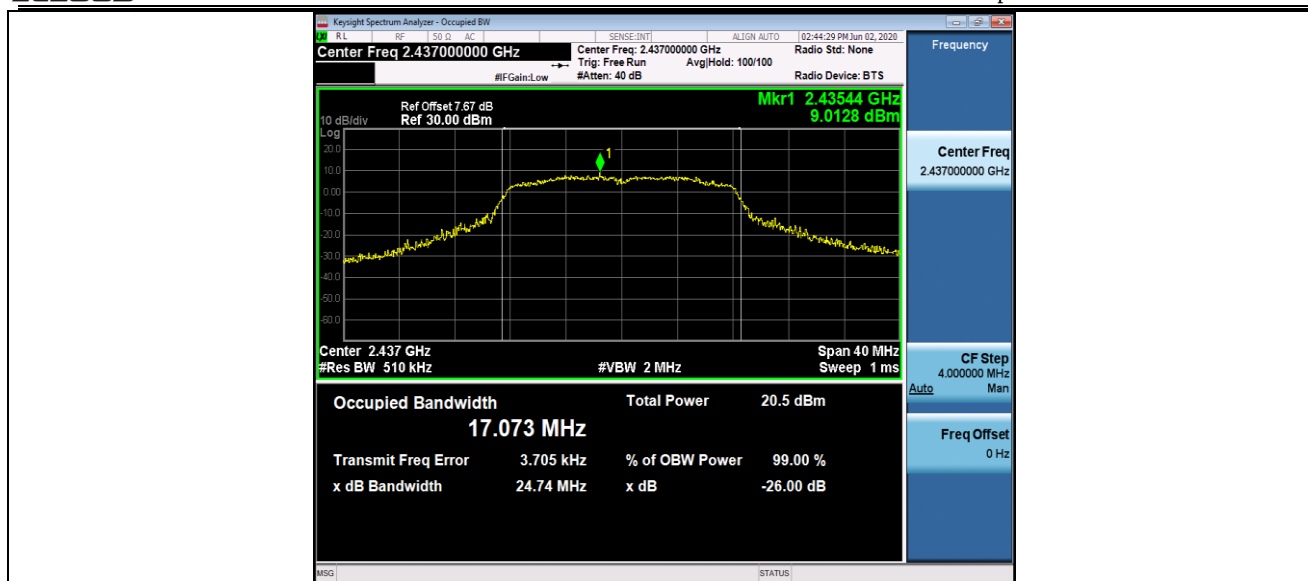


11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437

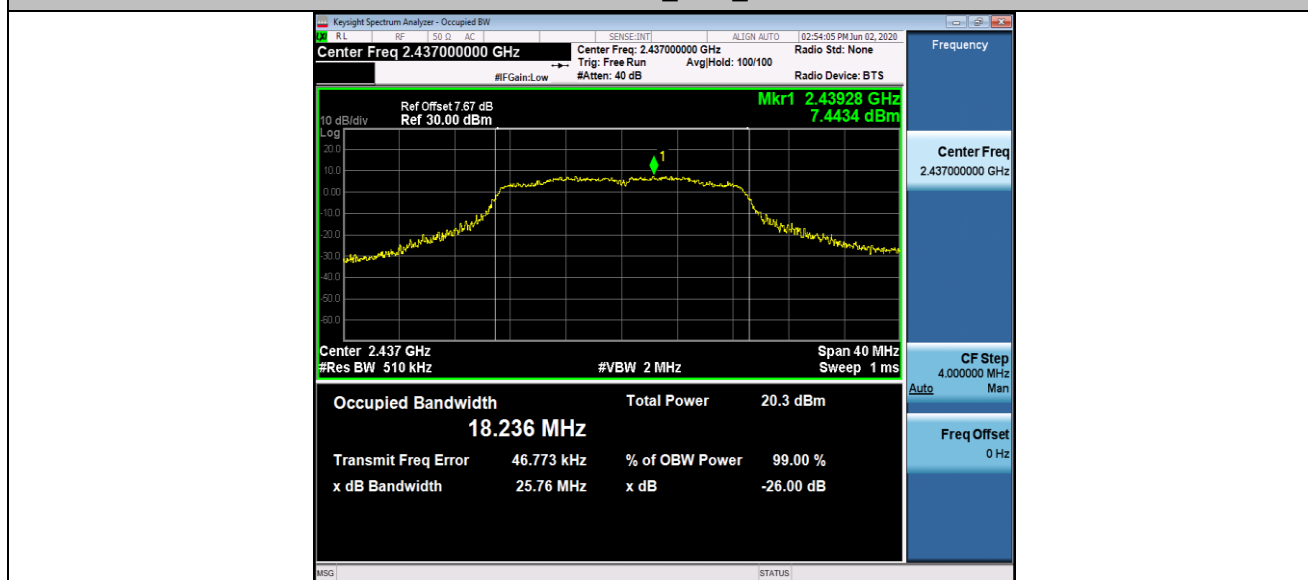


11N20SISO_Ant1_2462




11N40SISO_Ant1_2422

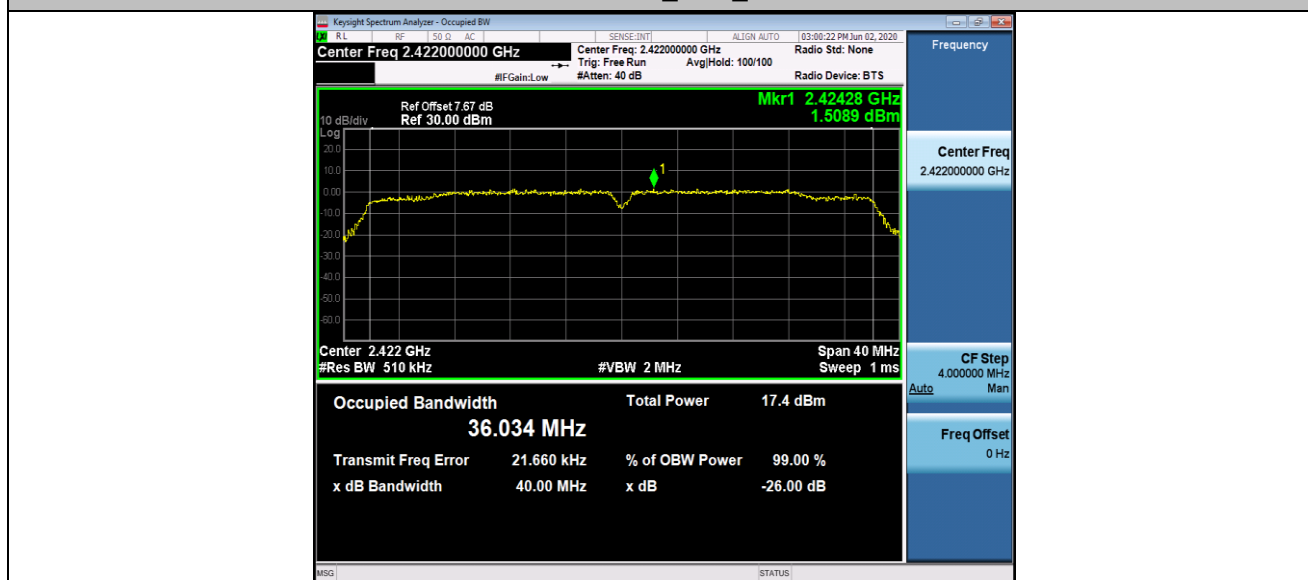

11N40SISO_Ant1_2437

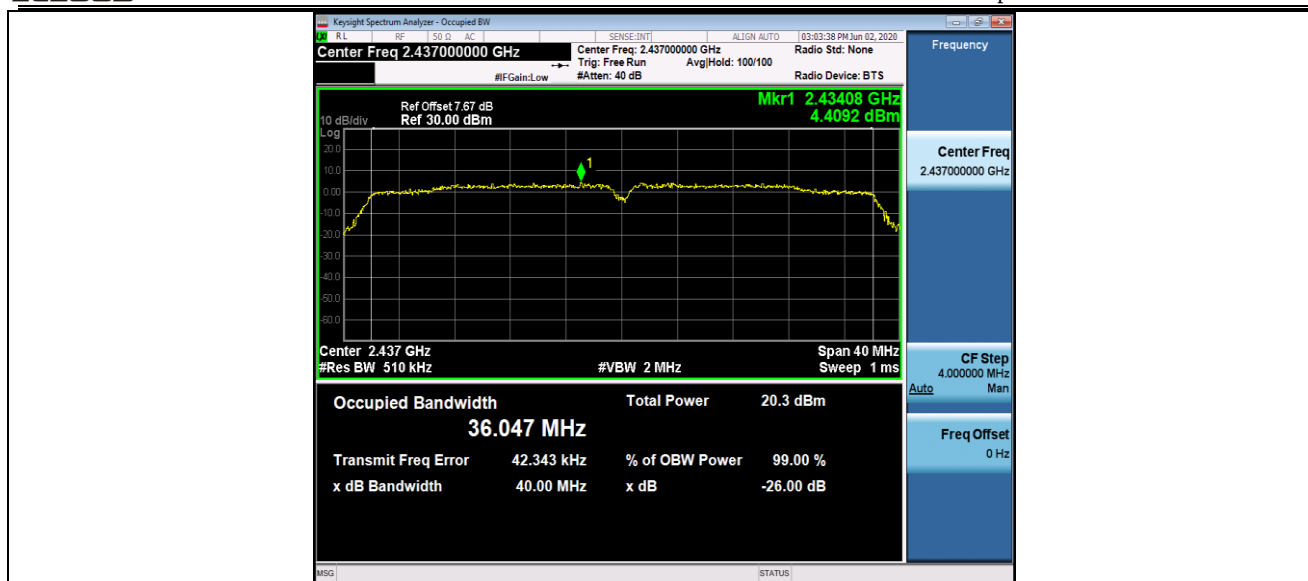

11N40SISO_Ant1_2452

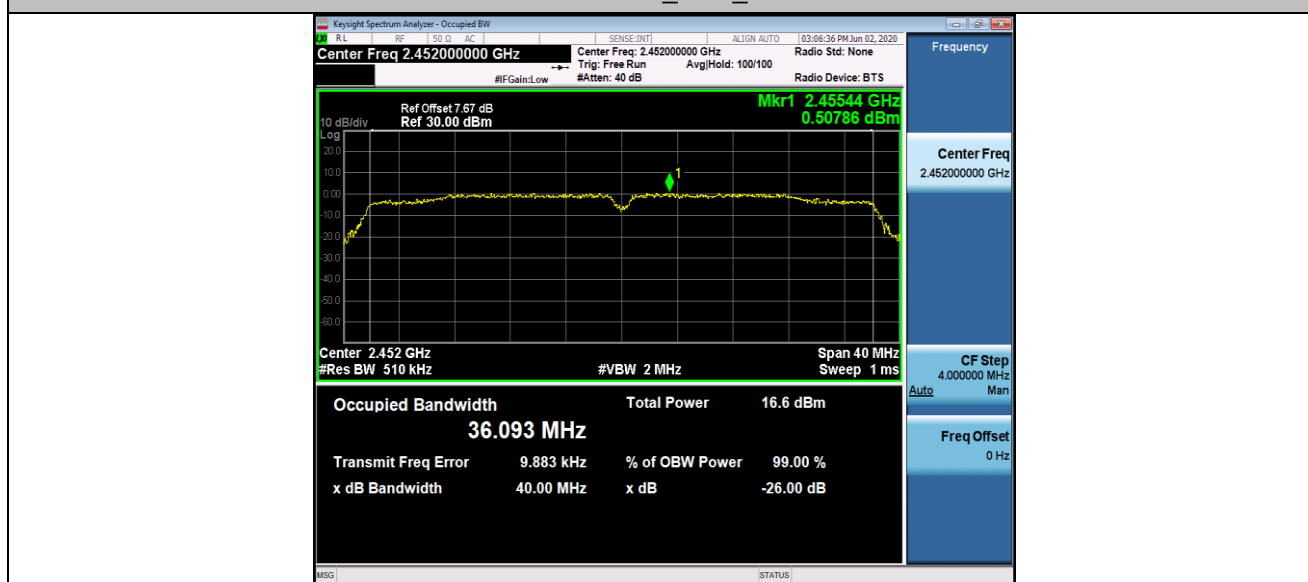


Appendix C: Maximum conducted output power

Test Result


TestMode	Antenna	Channel	DT (%)	10 log (1/x)	Result [dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	98.64	0.06	13.43	<=30	PASS
		2437	100	0.00	14.13	<=30	PASS
		2462	98.64	0.06	14.48	<=30	PASS
11G	Ant1	2412	98.54	0.06	11.31	<=30	PASS
		2437	98.6	0.06	14.32	<=30	PASS
		2462	98.6	0.06	10.68	<=30	PASS
11N20SISO	Ant1	2412	98.43	0.07	11.05	<=30	PASS
		2437	98.49	0.07	14.16	<=30	PASS
		2462	98.43	0.07	10.96	<=30	PASS
11N40SISO	Ant1	2422	96.97	0.13	11.16	<=30	PASS
		2437	96.97	0.13	14.03	<=30	PASS
		2452	96.97	0.13	10.49	<=30	PASS

Test Graphs


11B_Ant1_2412

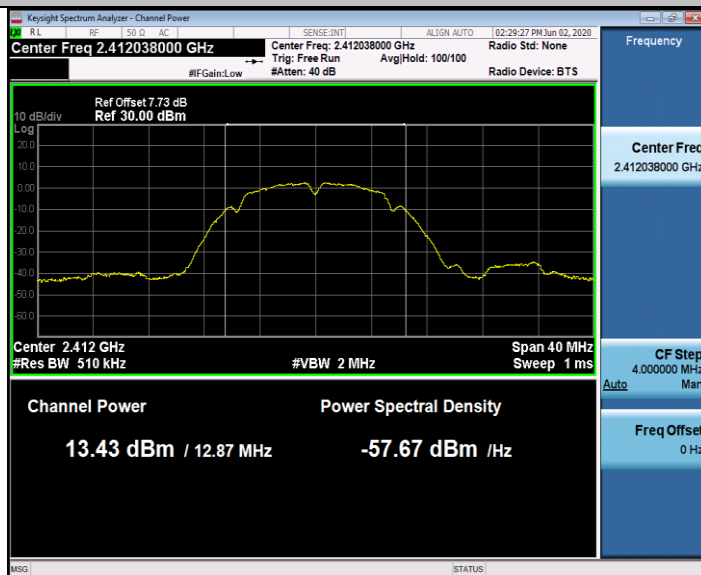


11B_Ant1_2437

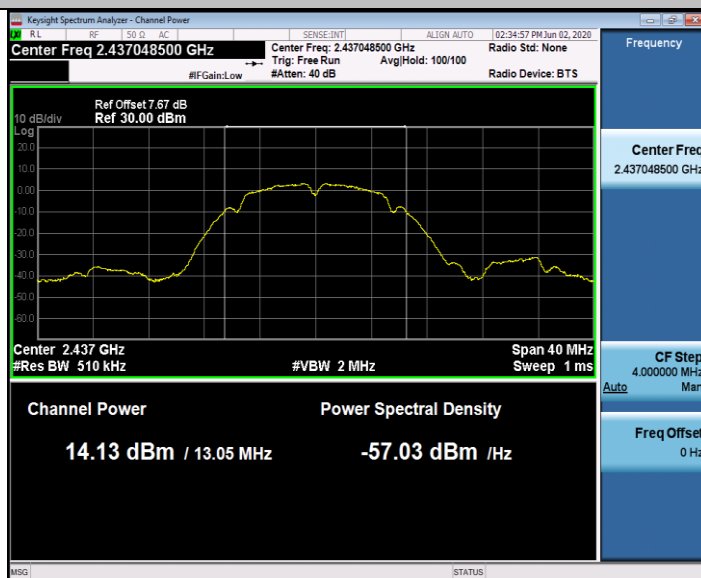


11B_Ant1_2462

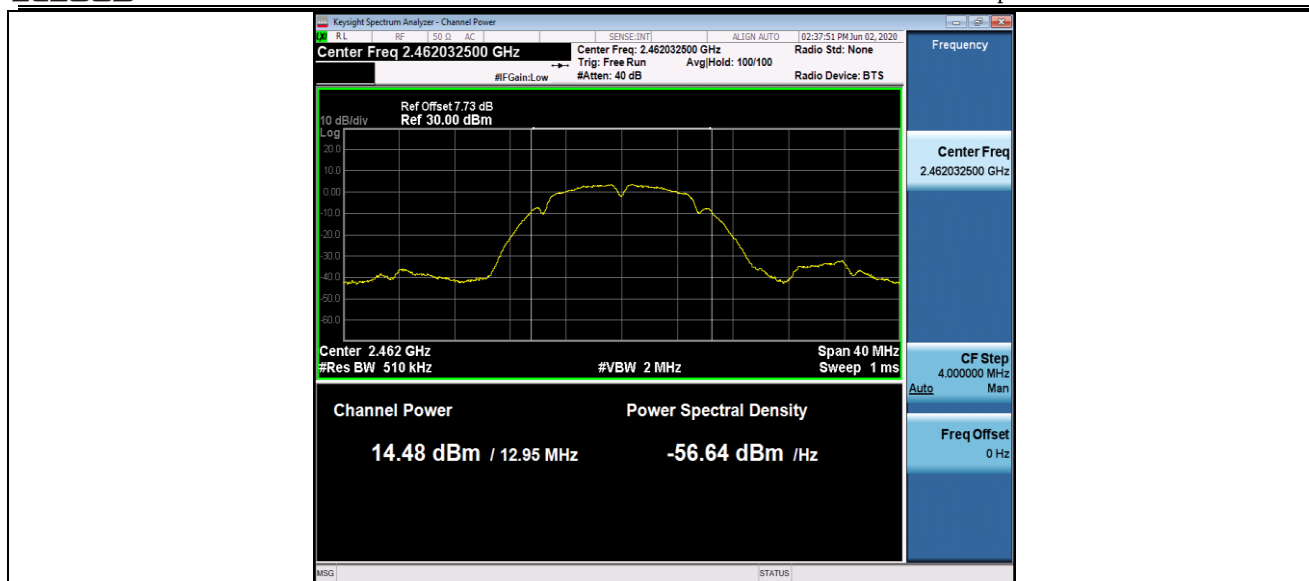


11G_Ant1_2412

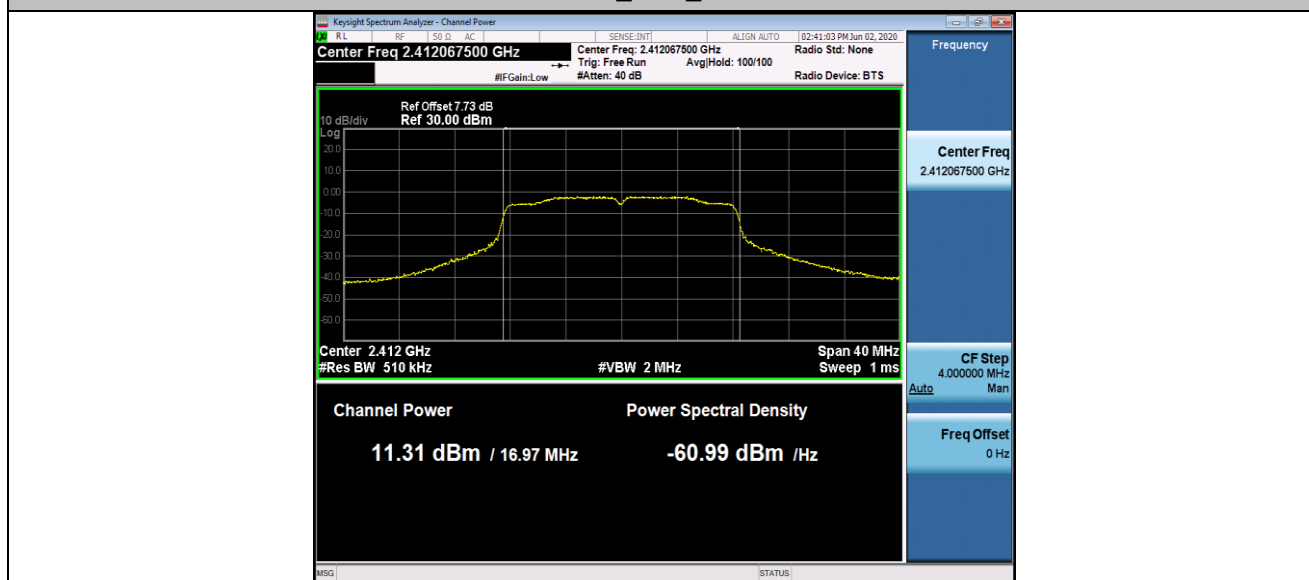


11G_Ant1_2437

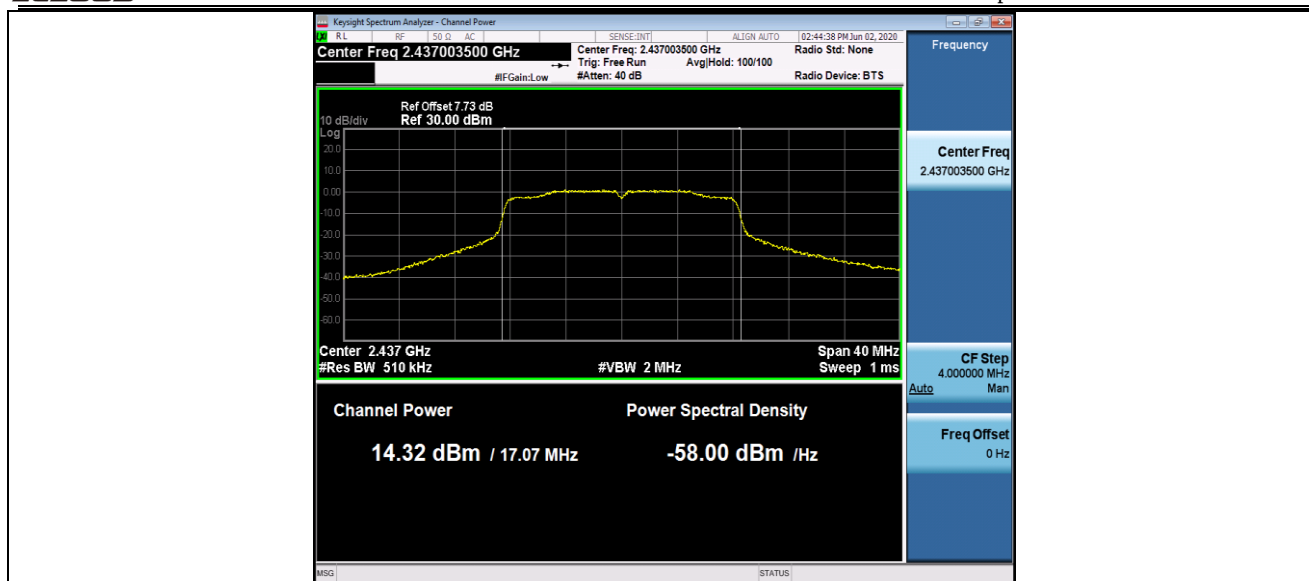


11G_Ant1_2462

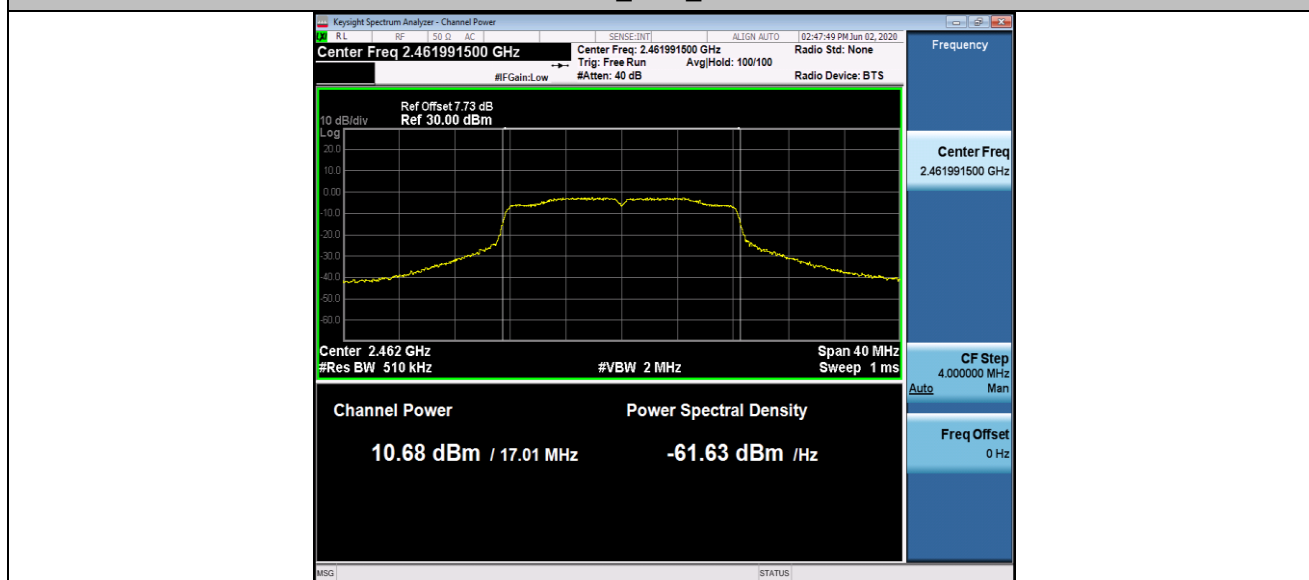


11N20SISO_Ant1_2412

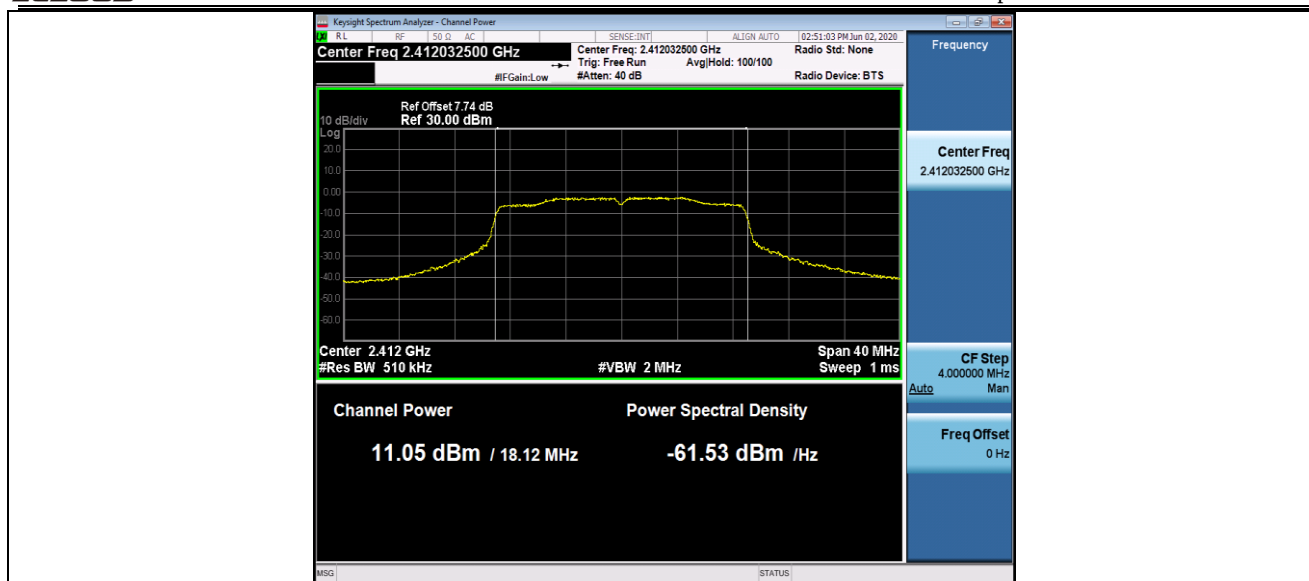


11N20SISO_Ant1_2437

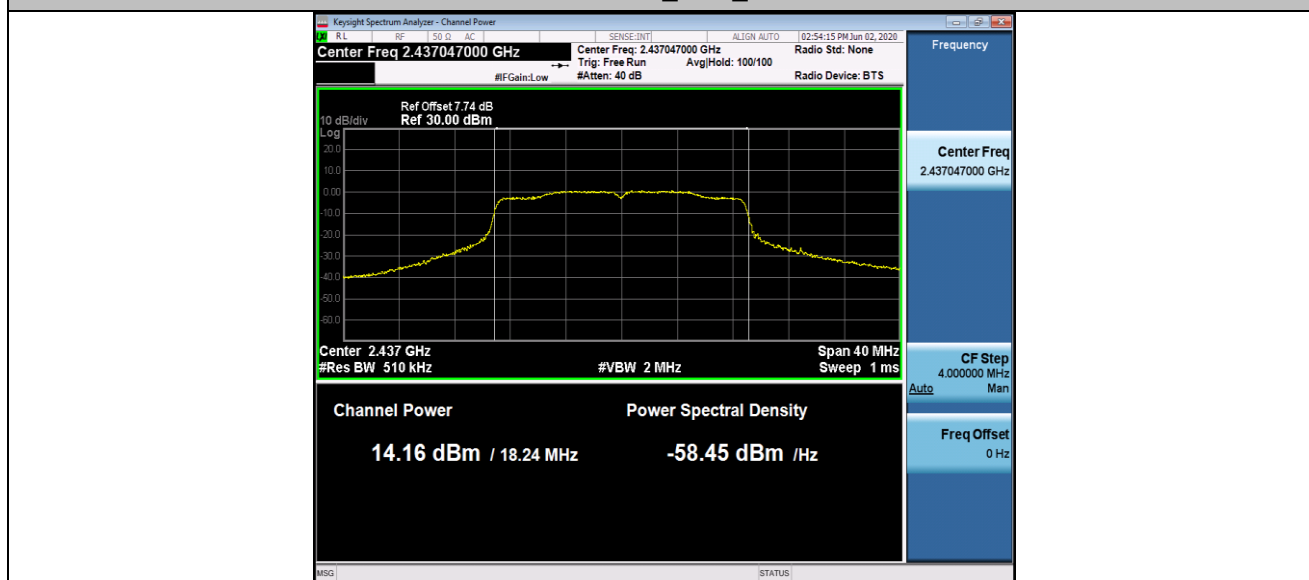


11N20SISO_Ant1_2462

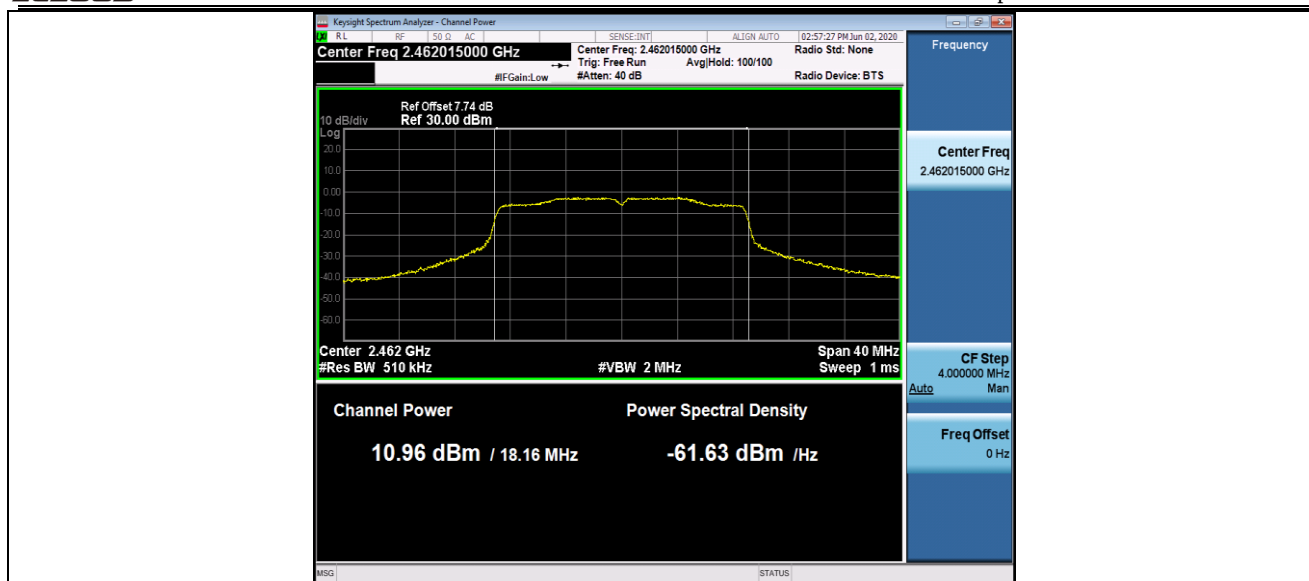


11N40SISO_Ant1_2422

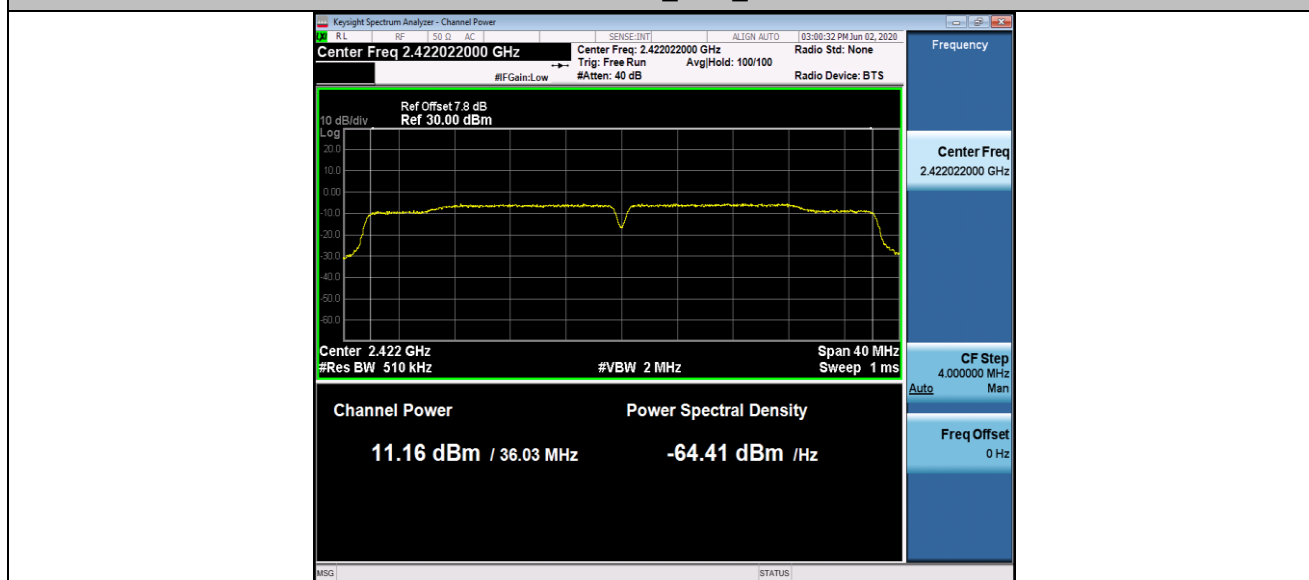

11N40SISO_Ant1_2437

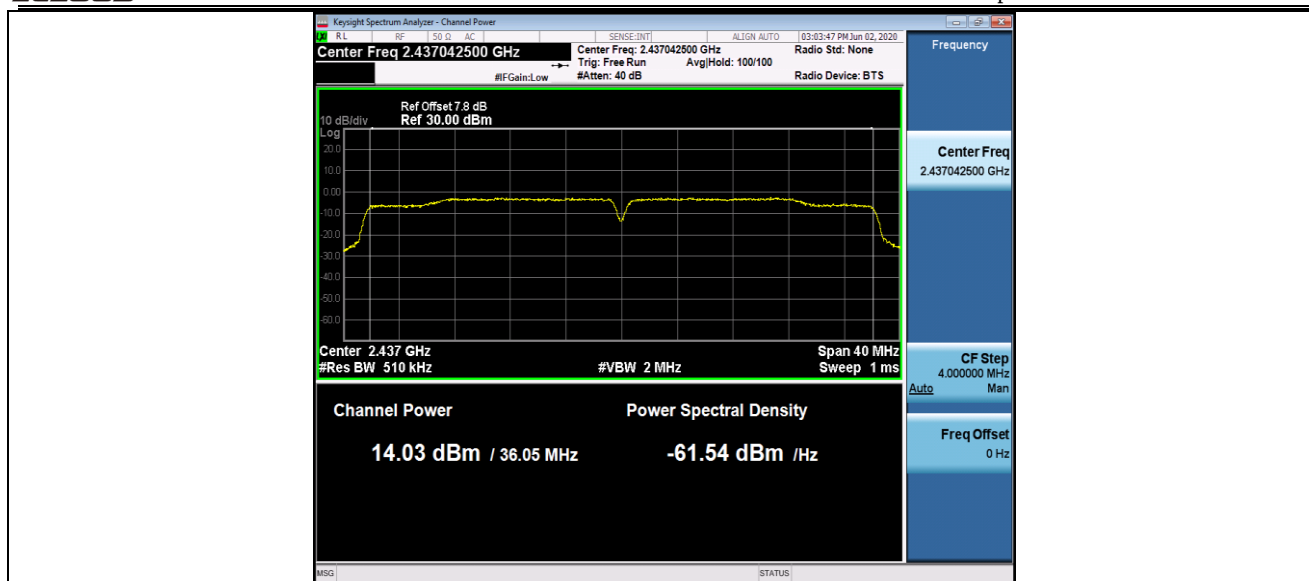

11N40SISO_Ant1_2452

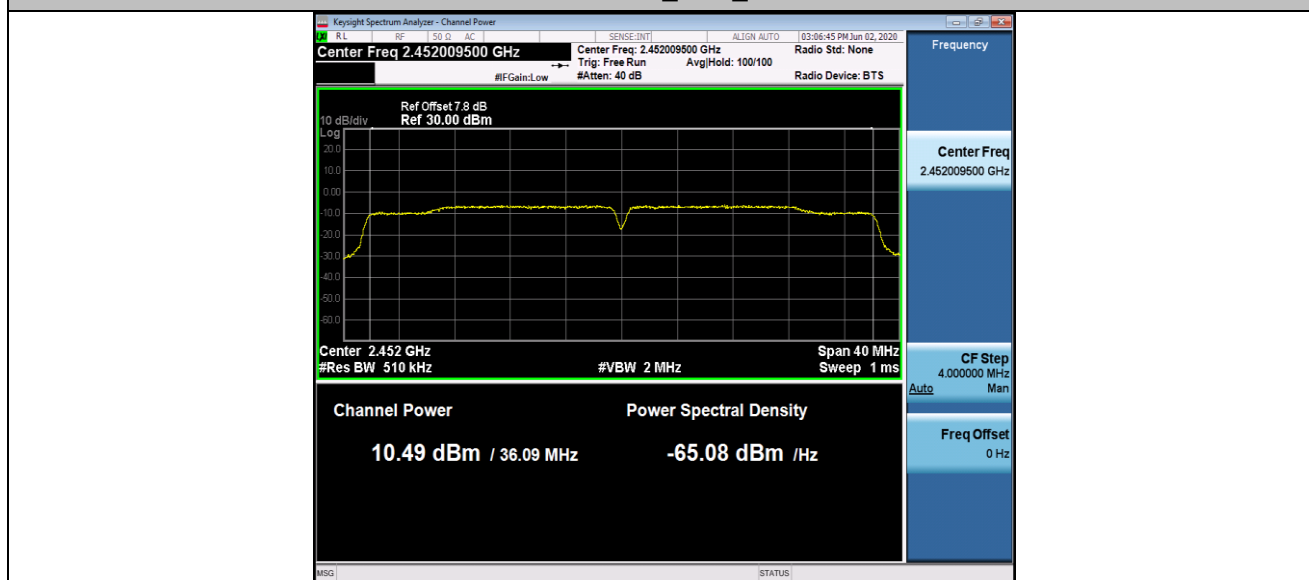


Appendix D: Duty Cycle

Test Result


TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	2.20	2.23	98.64
		2437	30.00	30.00	100.00
		2462	2.20	2.23	98.64
11G	Ant1	2412	2.05	2.08	98.54
		2437	2.05	2.07	98.60
		2462	2.05	2.07	98.60
11N20SISO	Ant1	2412	1.91	1.94	98.43
		2437	1.91	1.93	98.49
		2462	1.91	1.94	98.43

Test Graphs


11B_Ant1_2412

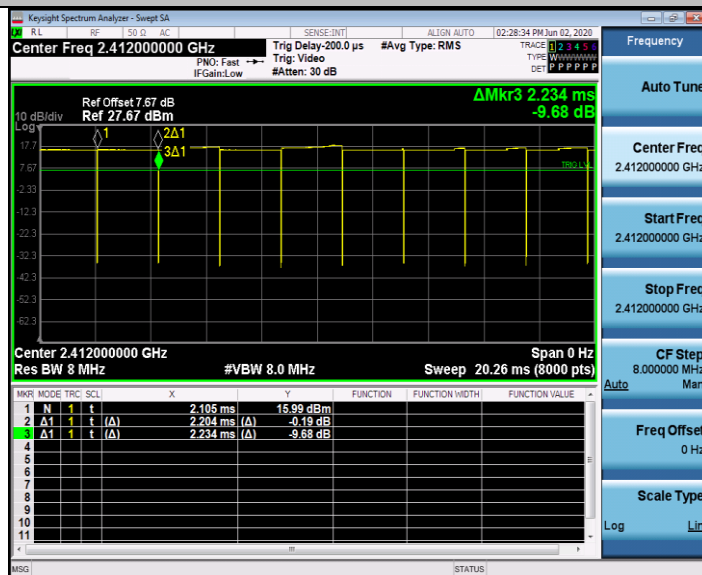


11B_Ant1_2437

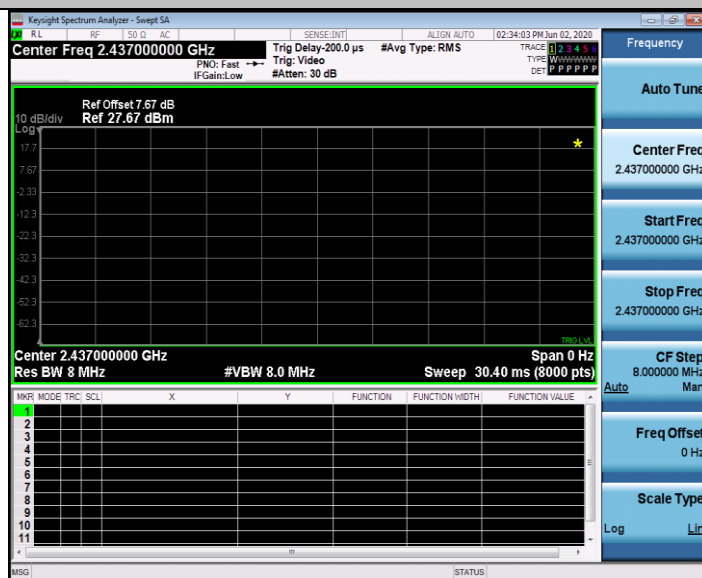


11B_Ant1_2462

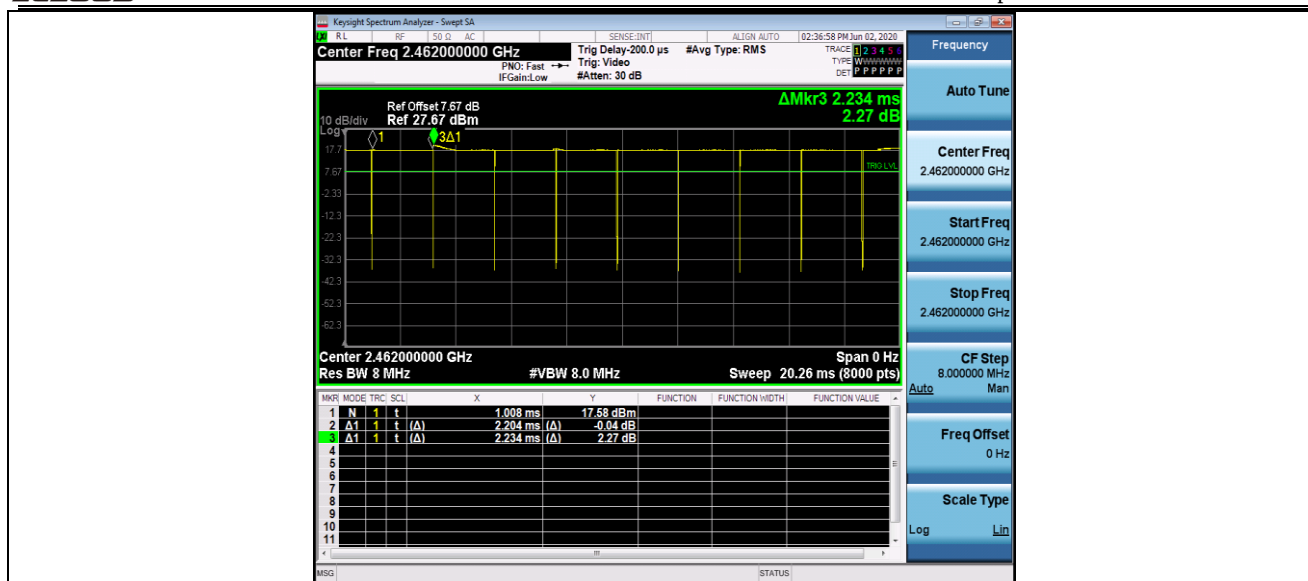


11G_Ant1_2412

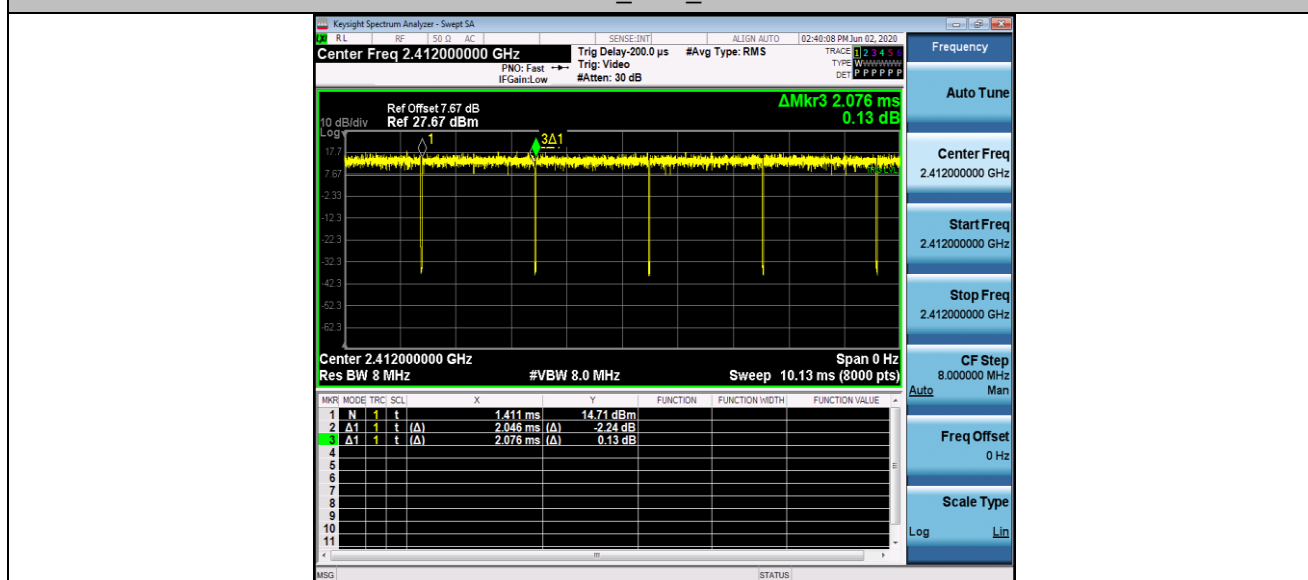


11G_Ant1_2437

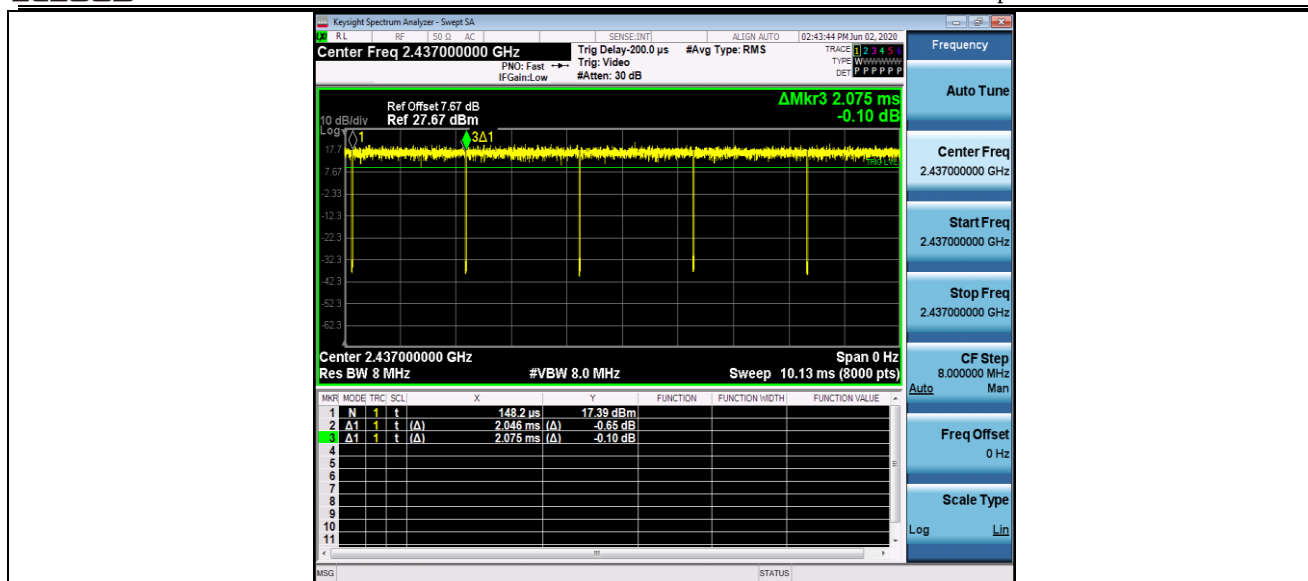


11G_Ant1_2462

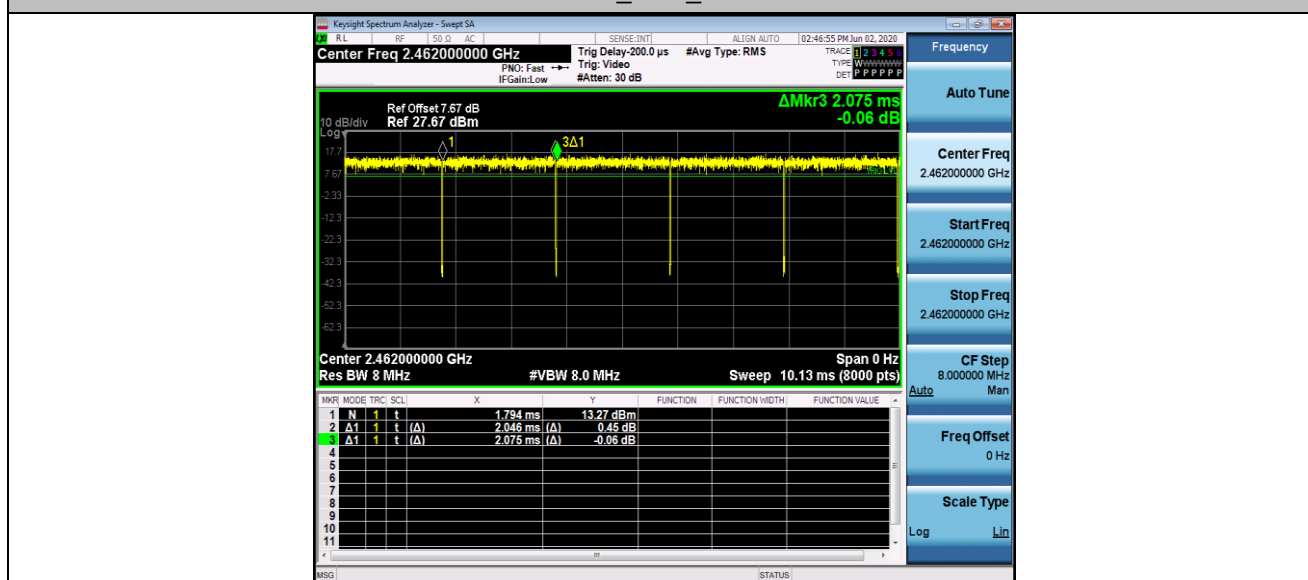


11N20SISO_Ant1_2412

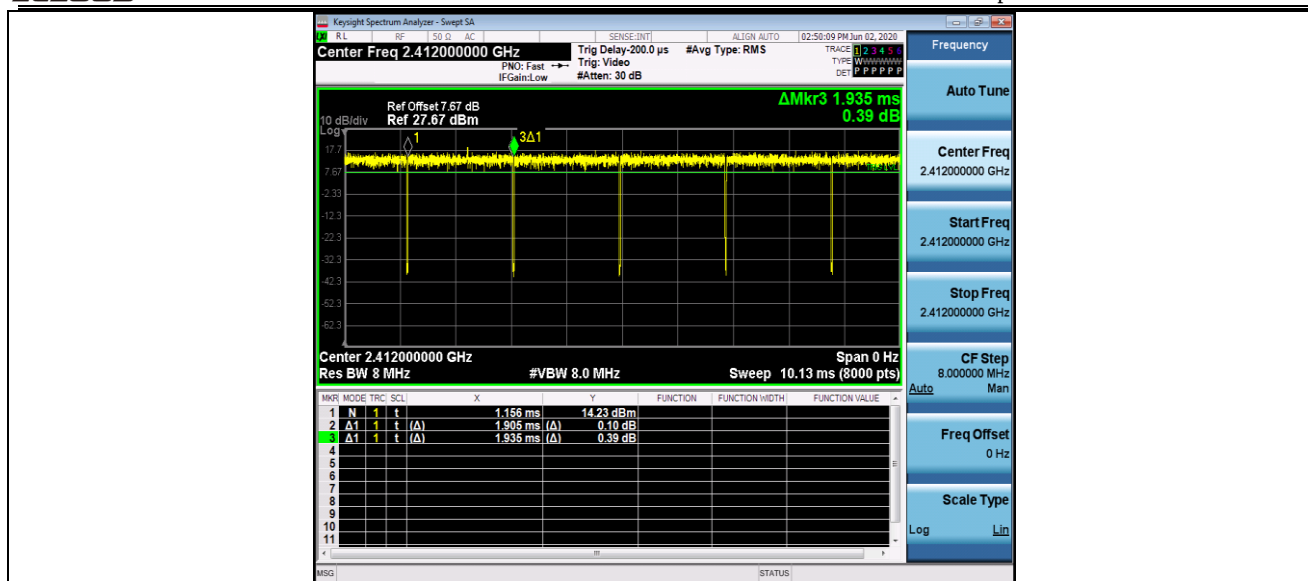


11N20SISO_Ant1_2437

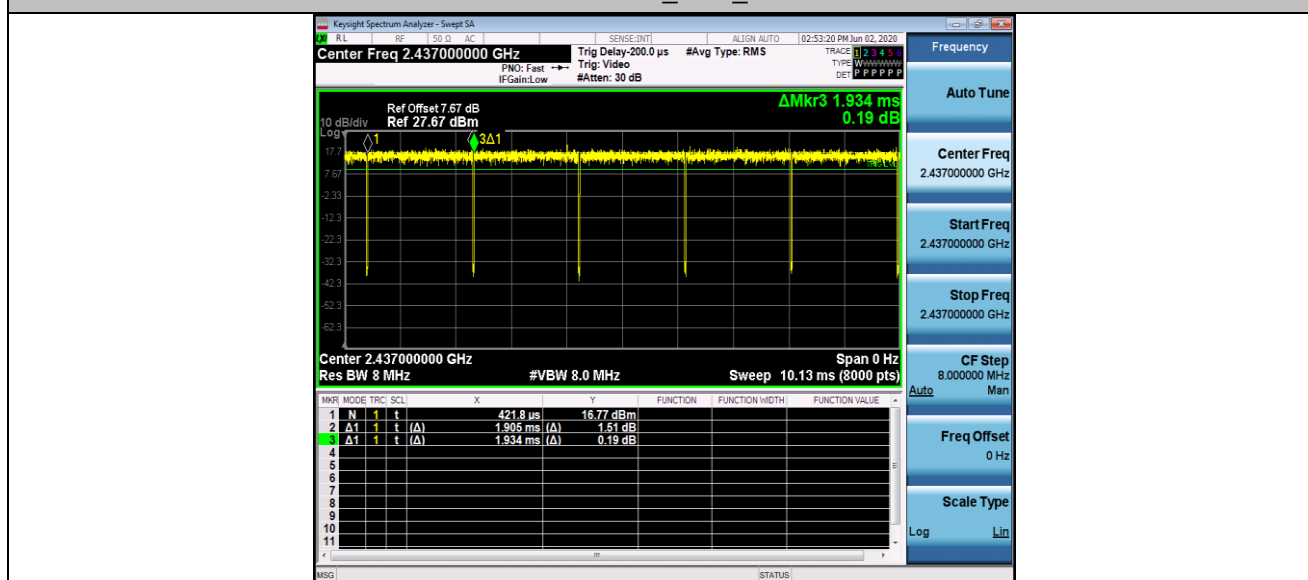


11N20SISO_Ant1_2462

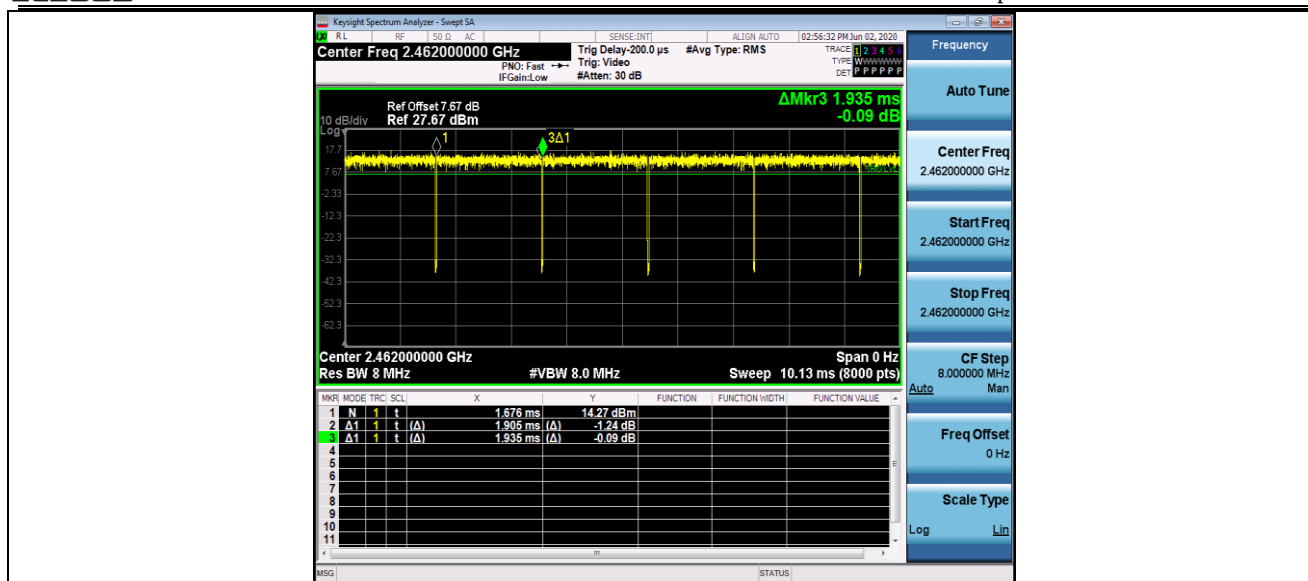


11N40SISO_Ant1_2422

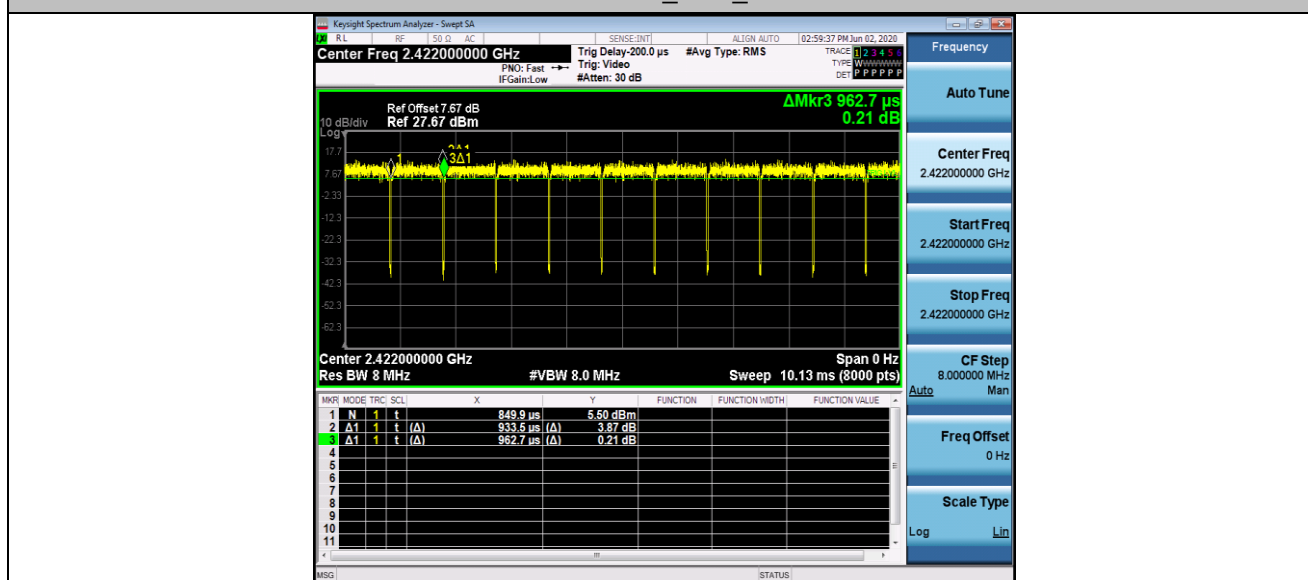

11N40SISO_Ant1_2437

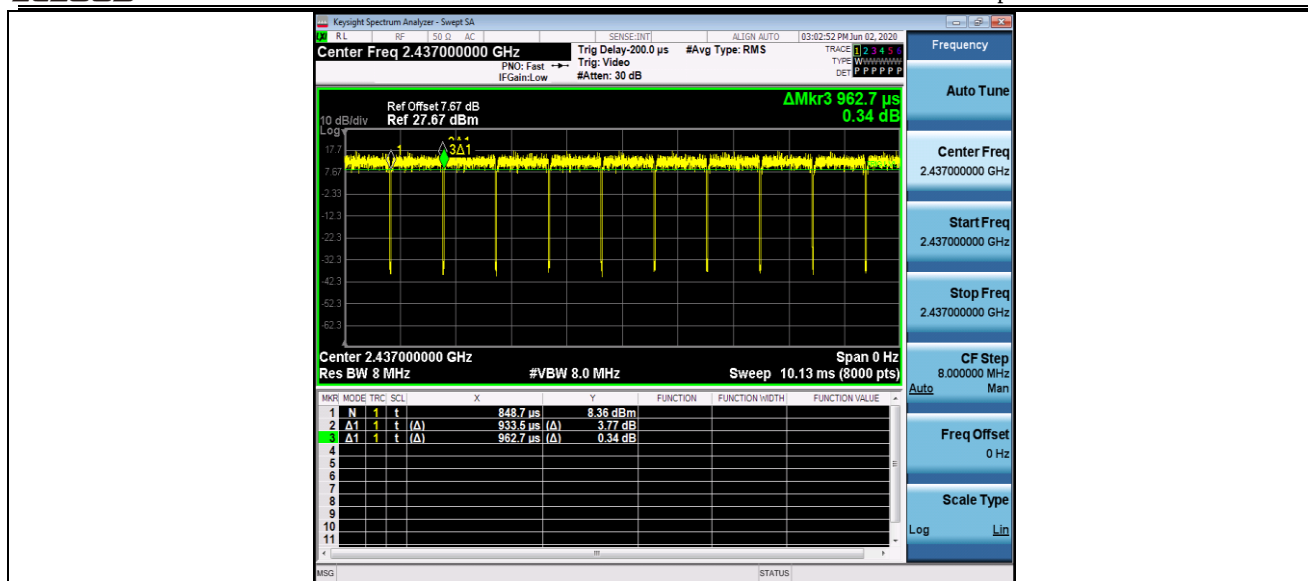

11N40SISO_Ant1_2452

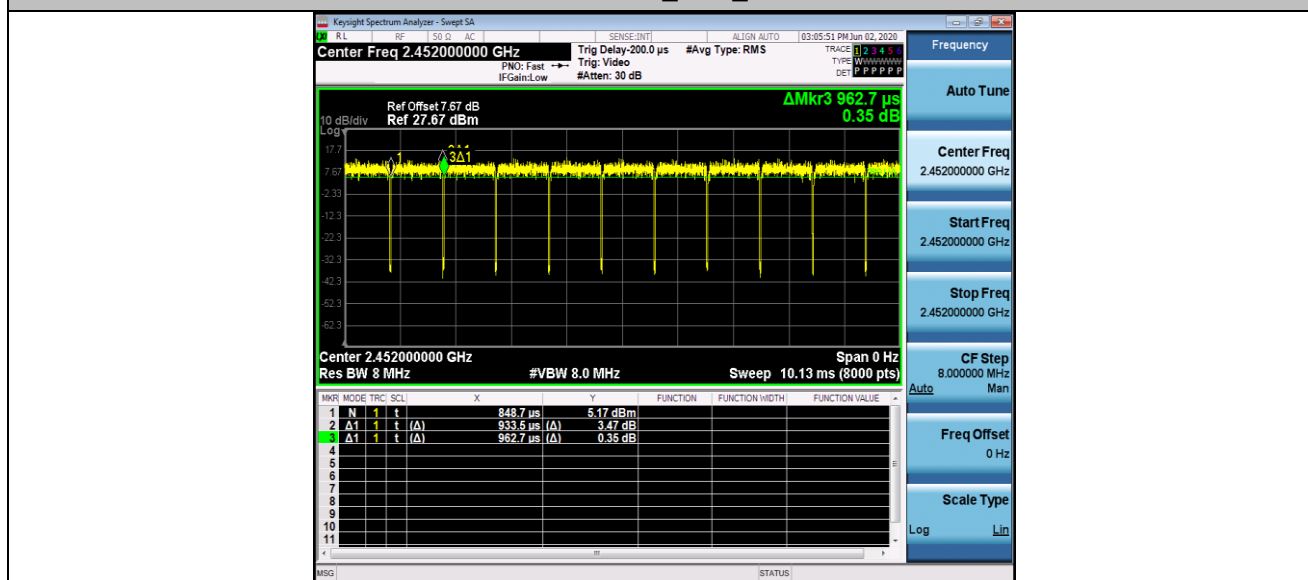

Appendix E: Maximum power spectral density

Test Result

TestMode	Antenna	Channel	DT (%)	10 log (1/x)	Result [dBm/30kHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	98.64	0.06	-8.46	-18.46	<=8	PASS
		2437	100	0.00	-8.06	-18.06	<=8	PASS
		2462	98.64	0.06	-7.6	-17.6	<=8	PASS
11G	Ant1	2412	98.54	0.06	-12.3	-22.3	<=8	PASS
		2437	98.6	0.06	-9.57	-19.57	<=8	PASS
		2462	98.6	0.06	-12.5	-22.5	<=8	PASS
11N20SISO	Ant1	2412	98.43	0.07	-12.55	-22.55	<=8	PASS
		2437	98.49	0.07	-9.78	-19.78	<=8	PASS
		2462	98.43	0.07	-12.19	-22.19	<=8	PASS
11N40SISO	Ant1	2422	96.97	0.02	-14.76	-24.76	<=8	PASS
		2437	96.97	0.02	-12.25	-22.25	<=8	PASS
		2452	96.97	0.02	-15.78	-25.78	<=8	PASS

Note:

calculating the RBW=3kHz value

-8.46 (AV.PSD At RBW=30kHz)-10*log(30/3)=-18.46(AV.PSD At RBW=3kHz)

Test Graphs

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

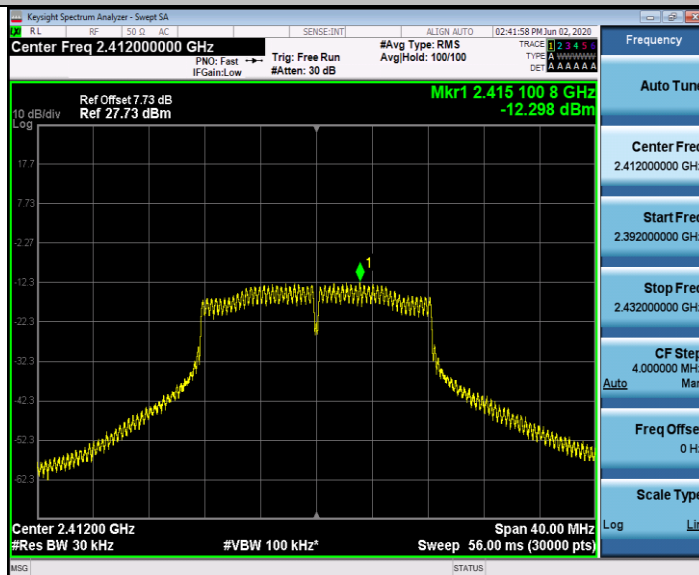


11G_Ant1_2437

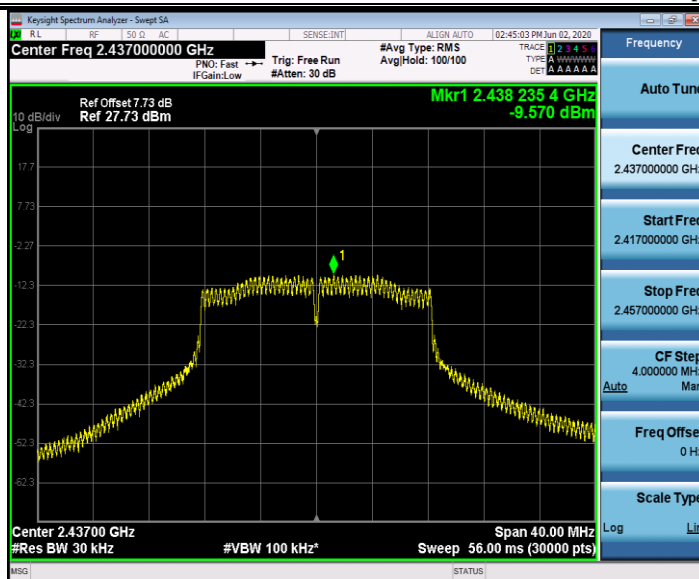


11G_Ant1_2462

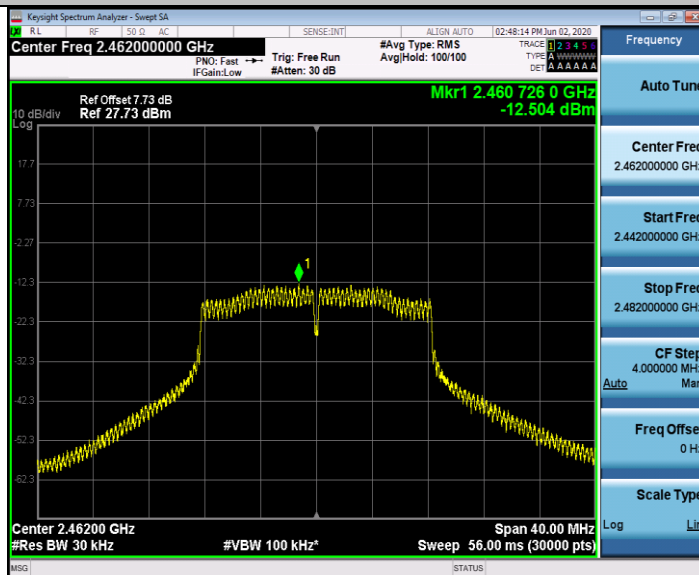


11N20SISO_Ant1_2412

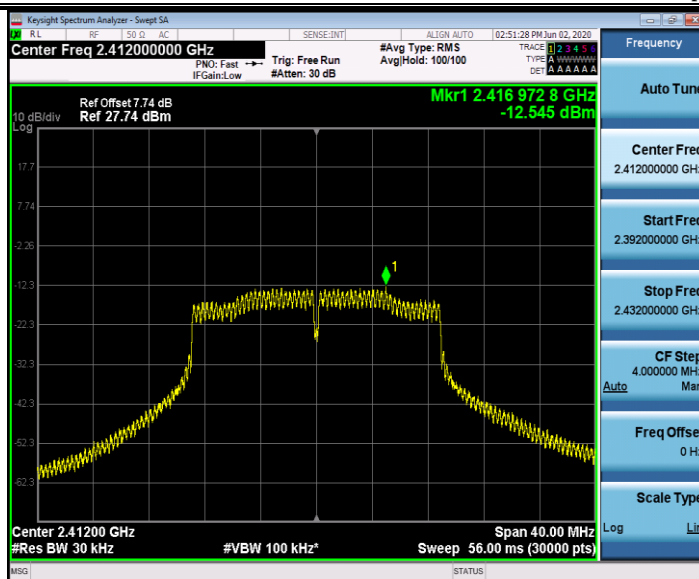


11N20SISO_Ant1_2437

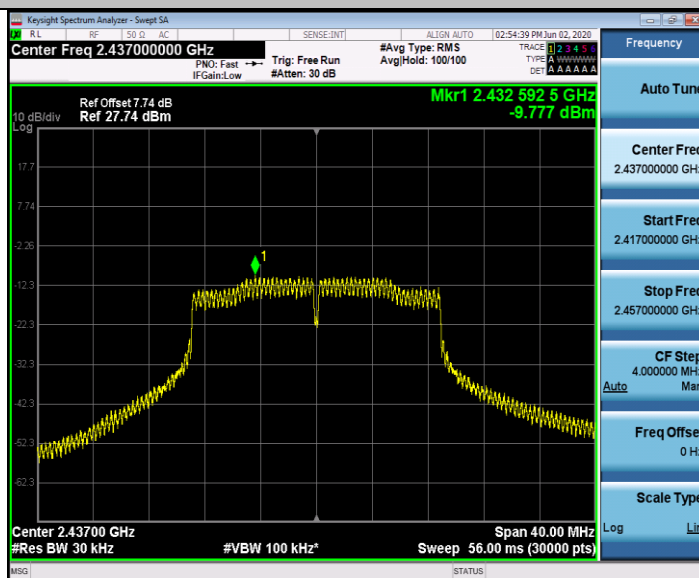


11N20SISO_Ant1_2462

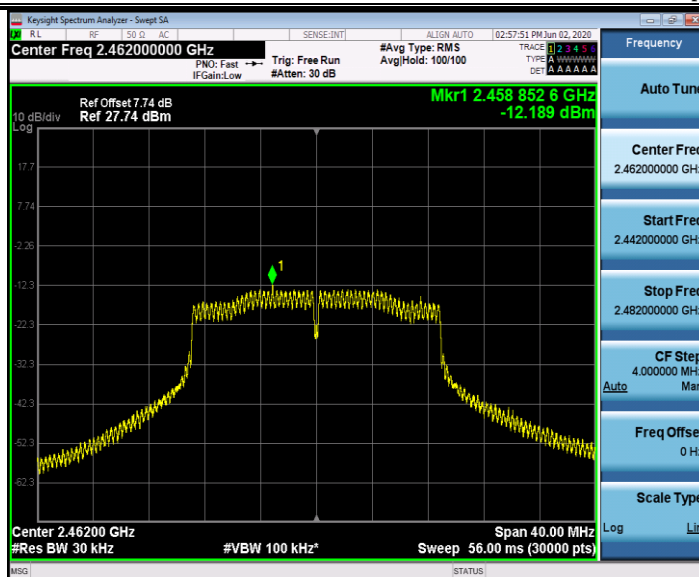

11N40SISO_Ant1_2422

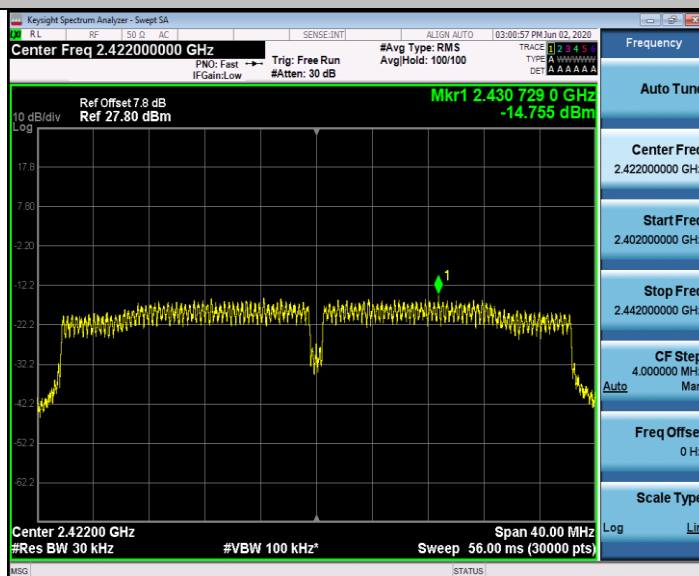

11N40SISO_Ant1_2437

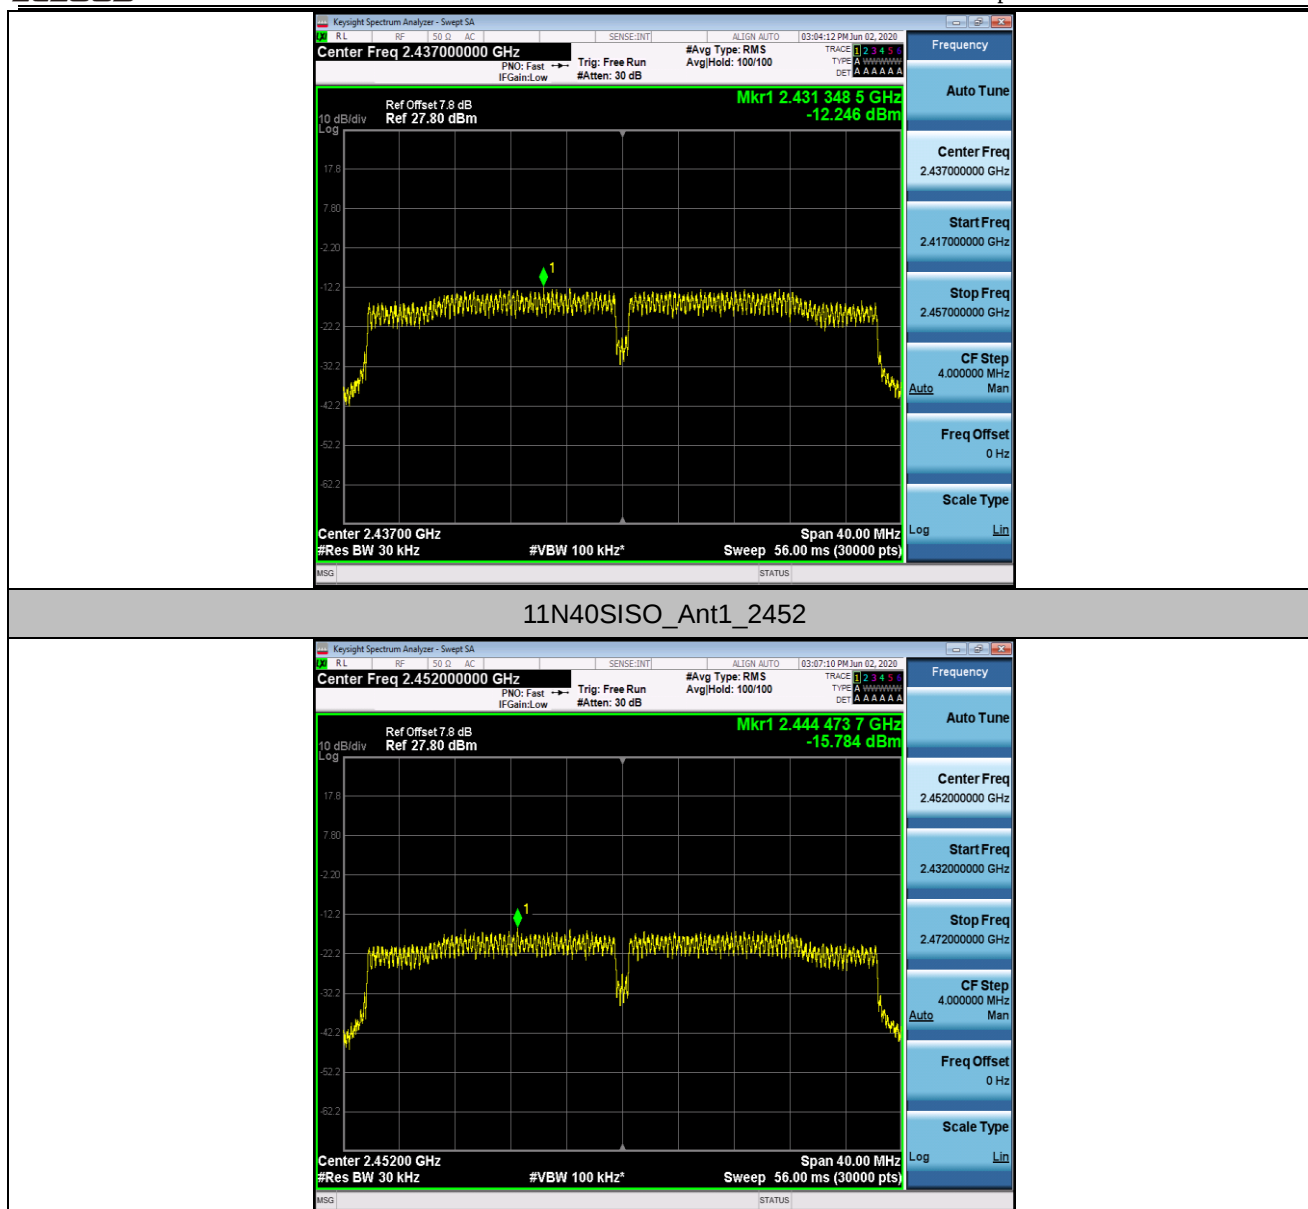


Appendix F: Band edge measurements

Test Result


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.13	-39.5	<=-25.87	PASS
		High	2462	4.76	-41.69	<=-25.25	PASS
11G	Ant1	Low	2412	0.94	-29.73	<=-29.06	PASS
		High	2462	0.05	-41.99	<=-29.96	PASS
11N20SISO	Ant1	Low	2412	0.96	-30.25	<=-29.04	PASS
		High	2462	0.73	-36.62	<=-29.27	PASS
11N40SISO	Ant1	Low	2422	-1.97	-32.89	<=-31.97	PASS
		High	2452	-2.42	-33.08	<=-32.42	PASS

Test Graphs


11B_Ant1_Low_2412

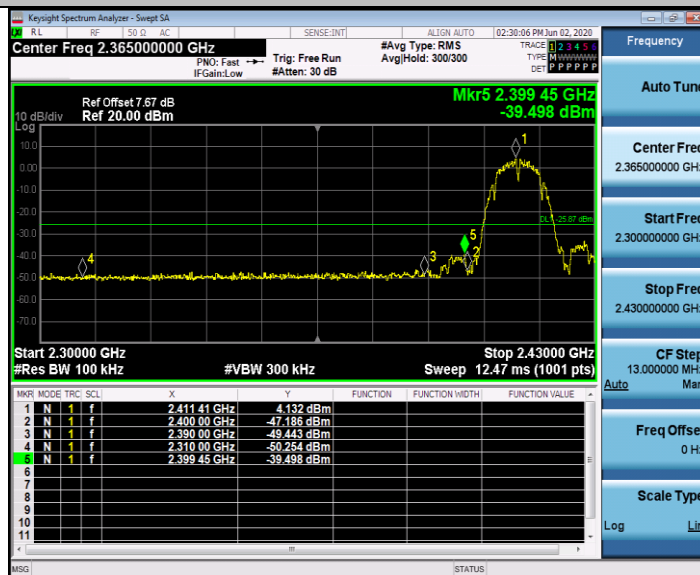

11B_Ant1_High_2462

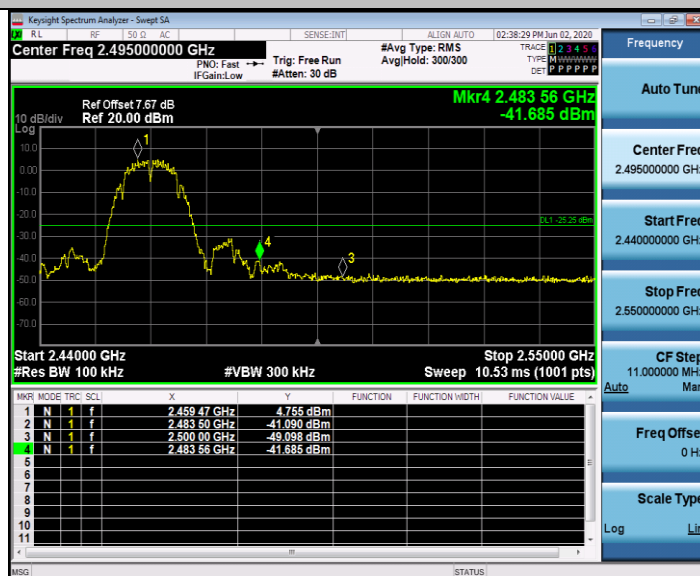


11G_Ant1_Low_2412

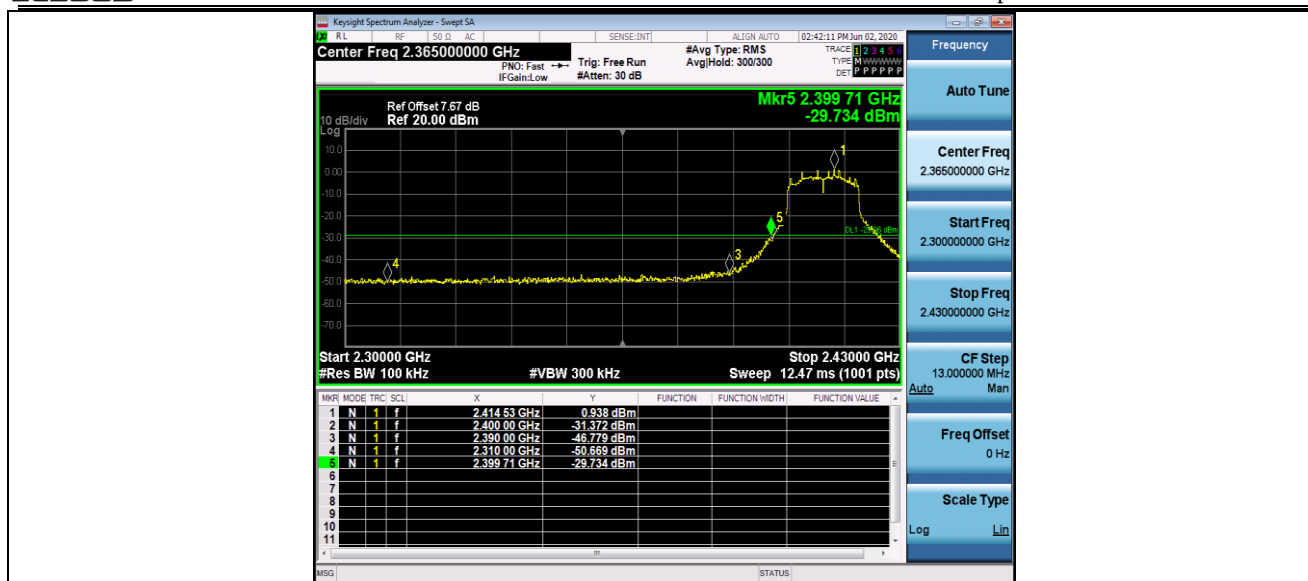


11G_Ant1_High_2462




11N20SISO_Ant1_Low_2412

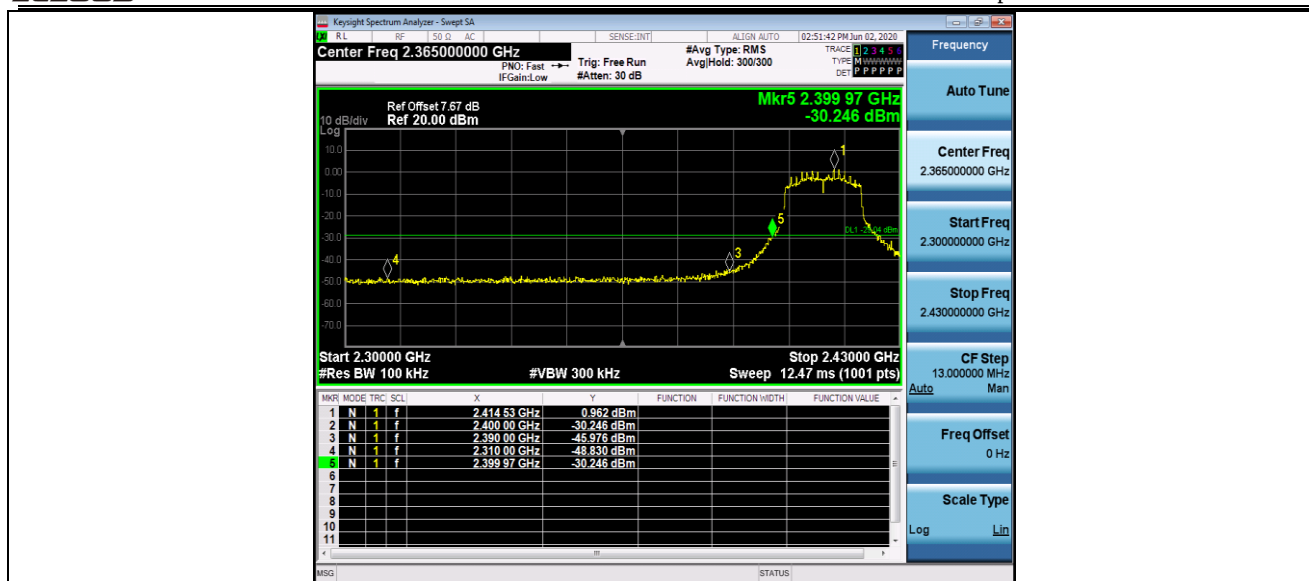

11N20SISO_Ant1_High_2462

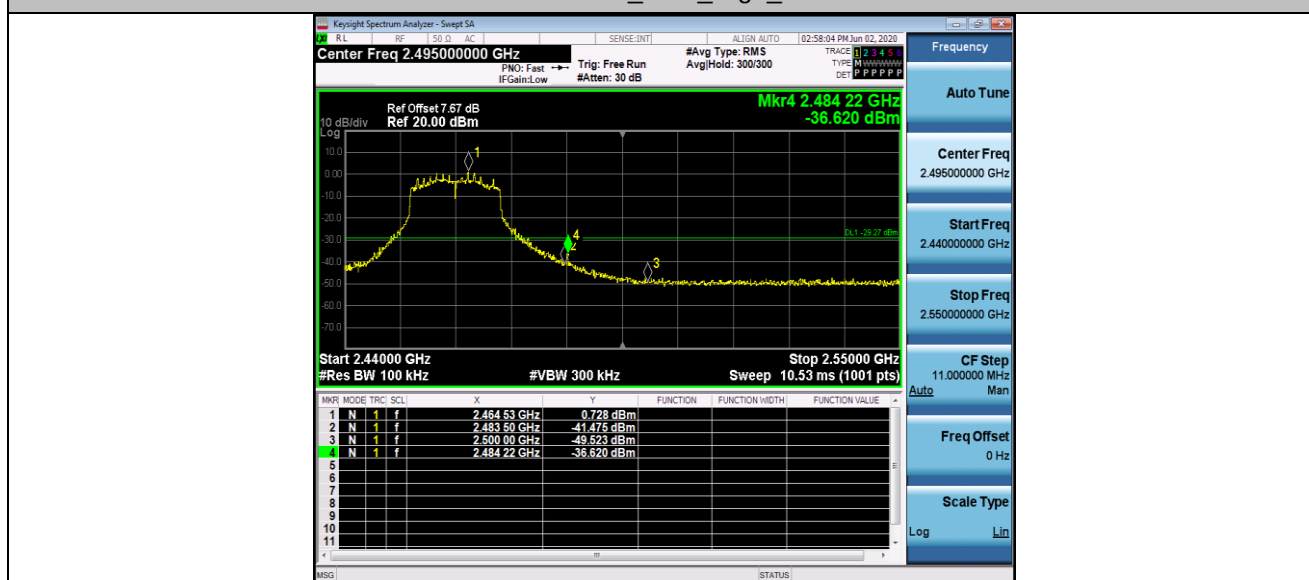

11N40SISO_Ant1_Low_2422

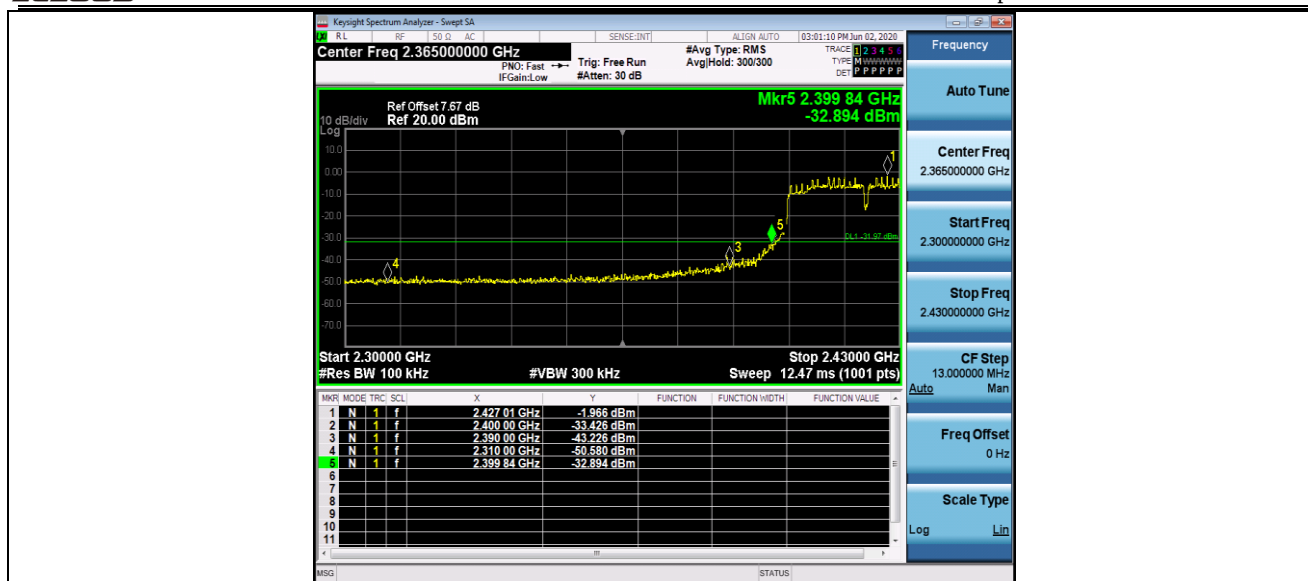

11N40SISO_Ant1_High_2452



Appendix G: Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	3.86	3.86	---	PASS
			30~1000	30~1000	-58.324	<=-26.141	PASS
			1000~26500	1000~26500	-37.622	<=-26.141	PASS
		2437	Reference	4.96	4.96	---	PASS
			30~1000	30~1000	-58.091	<=-25.044	PASS
			1000~26500	1000~26500	-38.514	<=-25.044	PASS
		2462	Reference	5.01	5.01	---	PASS
			30~1000	30~1000	-58.223	<=-24.985	PASS
			1000~26500	1000~26500	-37.329	<=-24.985	PASS
11G	Ant1	2412	Reference	1.18	1.18	---	PASS
			30~1000	30~1000	-58.073	<=-28.824	PASS
			1000~26500	1000~26500	-31.661	<=-28.824	PASS
		2437	Reference	4.27	4.27	---	PASS
			30~1000	30~1000	-58.519	<=-25.734	PASS
			1000~26500	1000~26500	-38.919	<=-25.734	PASS
		2462	Reference	0.67	0.67	---	PASS
			30~1000	30~1000	-58.657	<=-29.331	PASS
			1000~26500	1000~26500	-38.951	<=-29.331	PASS
11N20SISO	Ant1	2412	Reference	0.94	0.94	---	PASS
			30~1000	30~1000	-58.397	<=-29.061	PASS
			1000~26500	1000~26500	-32.378	<=-29.061	PASS
		2437	Reference	2.96	2.96	---	PASS
			30~1000	30~1000	-57.956	<=-27.04	PASS
			1000~26500	1000~26500	-38.598	<=-27.04	PASS
		2462	Reference	0.61	0.61	---	PASS
			30~1000	30~1000	-57.235	<=-29.386	PASS
			1000~26500	1000~26500	-38.421	<=-29.386	PASS
11N40SISO	Ant1	2422	Reference	-2.35	-2.35	---	PASS
			30~1000	30~1000	-58.471	<=-32.345	PASS
			1000~26500	1000~26500	-33.297	<=-32.345	PASS


		2437	Reference	0.78	0.78	---	PASS
			30~1000	30~1000	-57.765	<=-29.22	PASS
			1000~26500	1000~26500	-38.558	<=-29.22	PASS
		2452	Reference	-3.22	-3.22	---	PASS
			30~1000	30~1000	-58.295	<=-33.215	PASS
			1000~26500	1000~26500	-37.463	<=-33.215	PASS

Test Graphs

11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

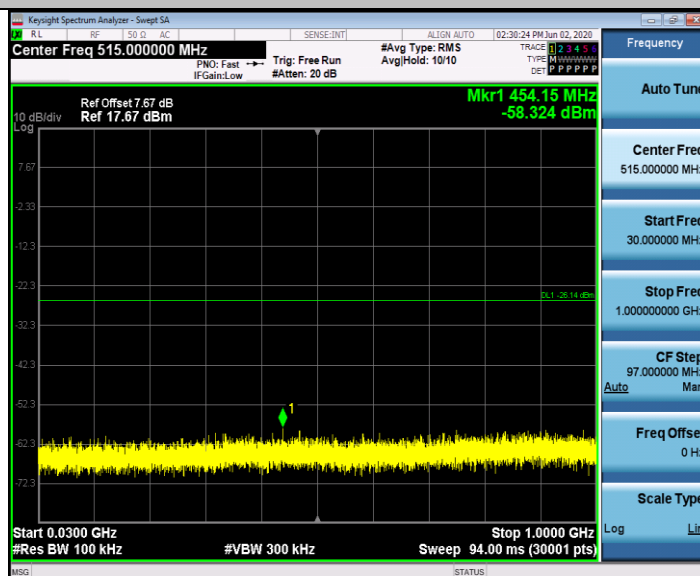

11B_Ant1_2412_1000~26500



11B_Ant1_2437_0-Reference



11B_Ant1_2437_30-1000




11B_Ant1_2437_1000-26500



11B_Ant1_2462_0-Reference



11B_Ant1_2462_30~1000

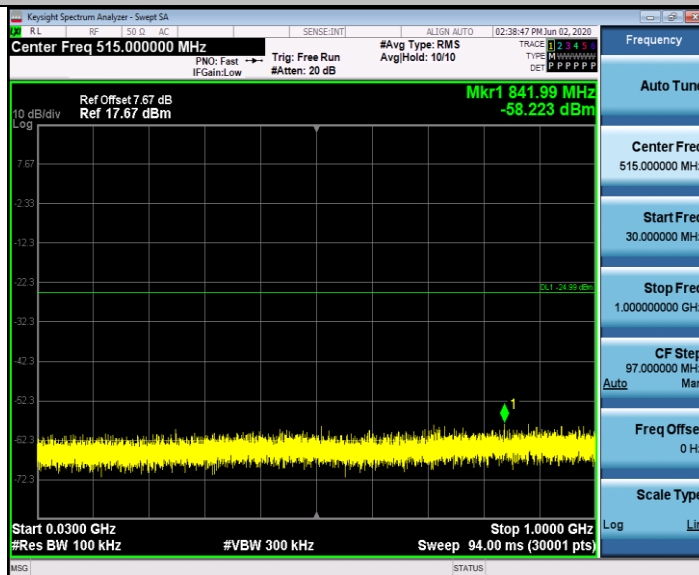


11B_Ant1_2462_1000~26500



11G_Ant1_2412_0~Reference



11G_Ant1_2412_30~1000

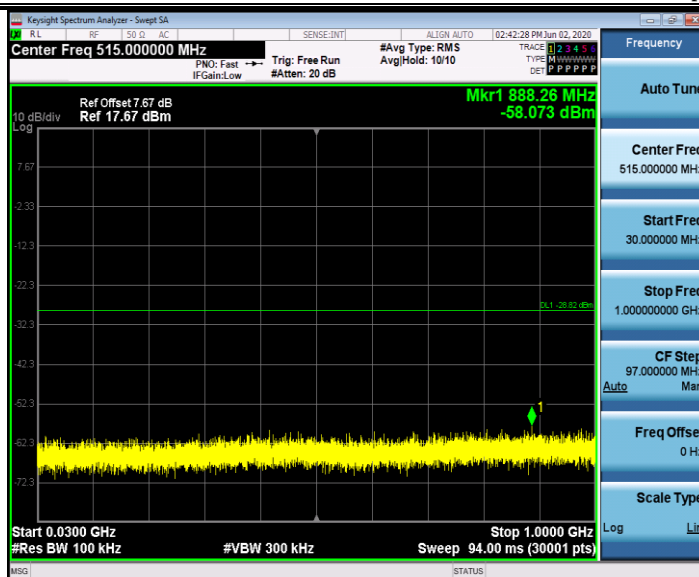

11G_Ant1_2412_1000-26500



11G_Ant1_2437_0-Reference



11G_Ant1_2437_30~1000




11G_Ant1_2437_1000~26500



11G_Ant1_2462_0~Reference



11G_Ant1_2462_30~1000

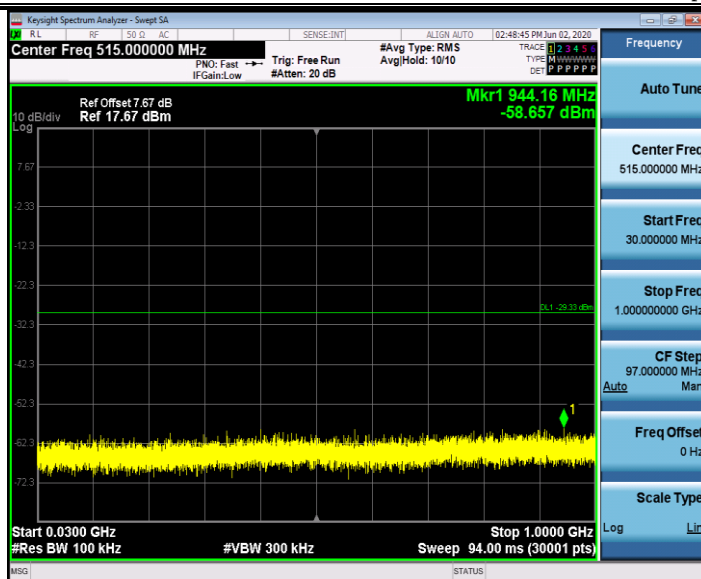


11G_Ant1_2462_1000-26500



11N20SISO_Ant1_2412_0-Reference



11N20SISO_Ant1_2412_30~1000

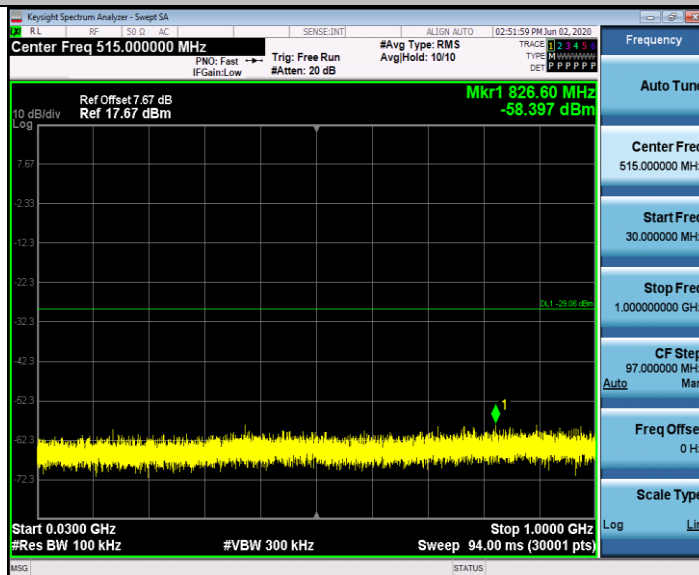

11N20SISO_Ant1_2412_1000~26500



11N20SISO_Ant1_2437_0-Reference



11N20SISO_Ant1_2437_30~1000




11N20SISO_Ant1_2437_1000-26500



11N20SISO_Ant1_2462_0-Reference




11N20SISO_Ant1_2462_30~1000

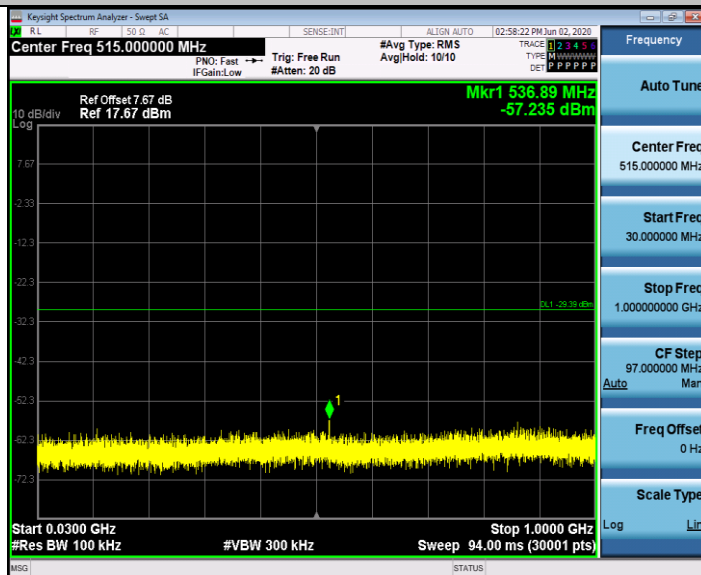

11N20SISO_Ant1_2462_1000~26500



11N40SISO_Ant1_2422_0-Reference

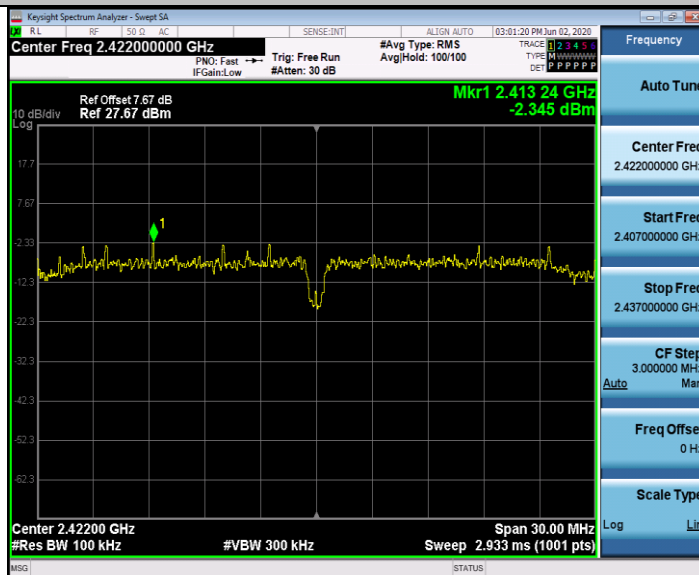


11N40SISO_Ant1_2422_30~1000




11N40SISO_Ant1_2422_1000-26500



11N40SISO_Ant1_2437_0-Reference

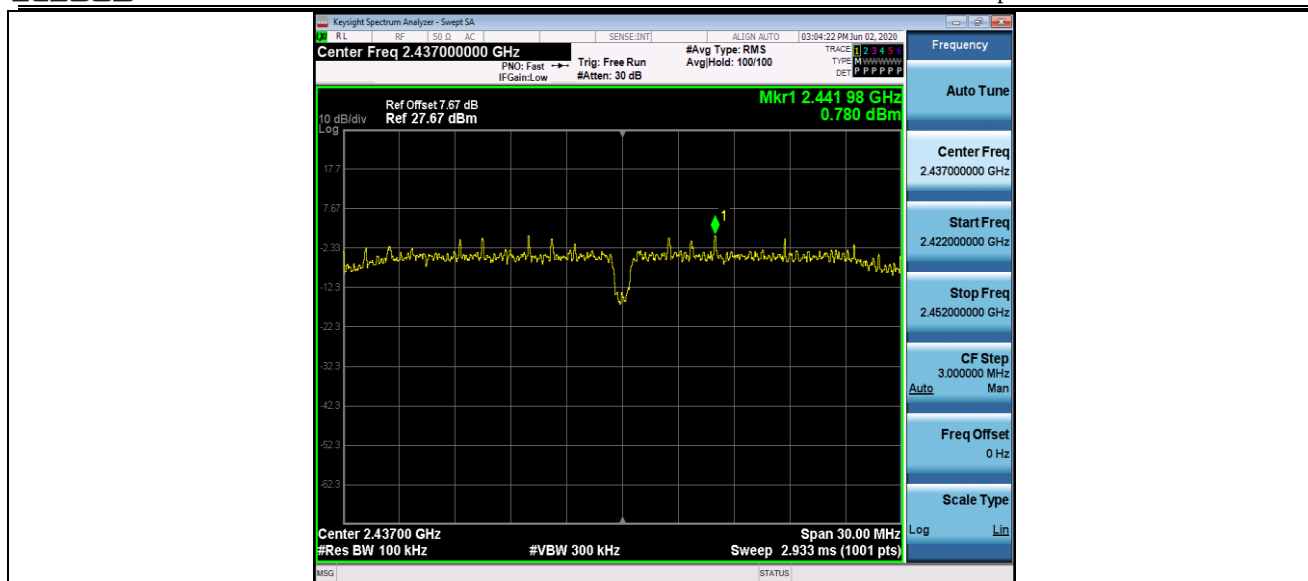


11N40SISO_Ant1_2437_30~1000

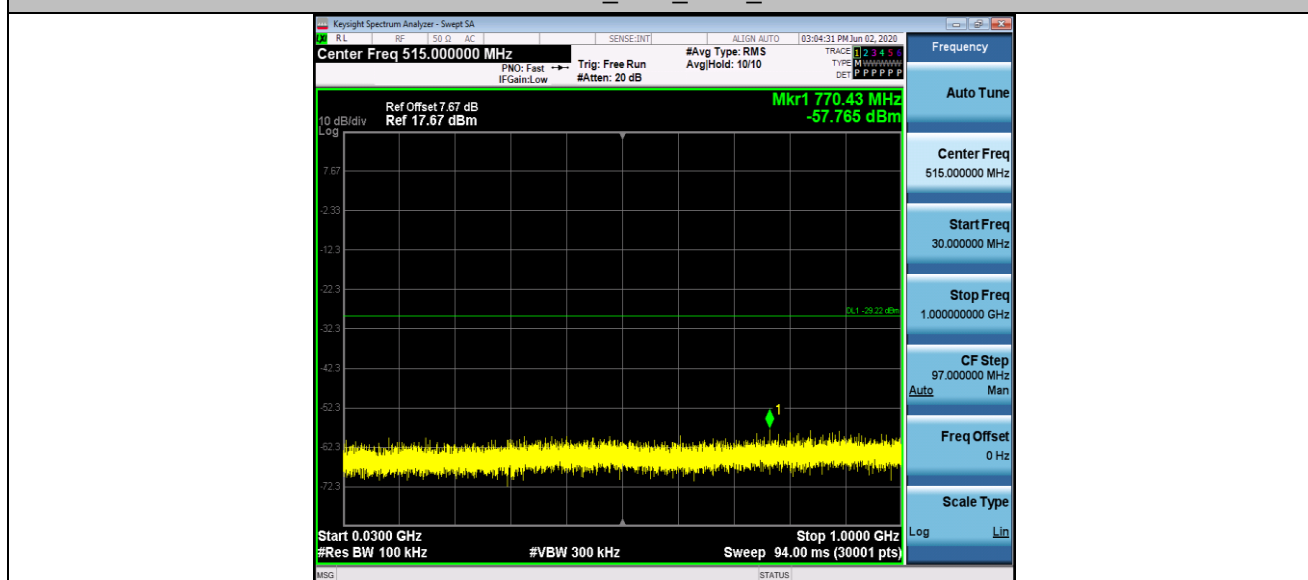

11N40SISO_Ant1_2437_1000~26500



11N40SISO_Ant1_2452_0-Reference

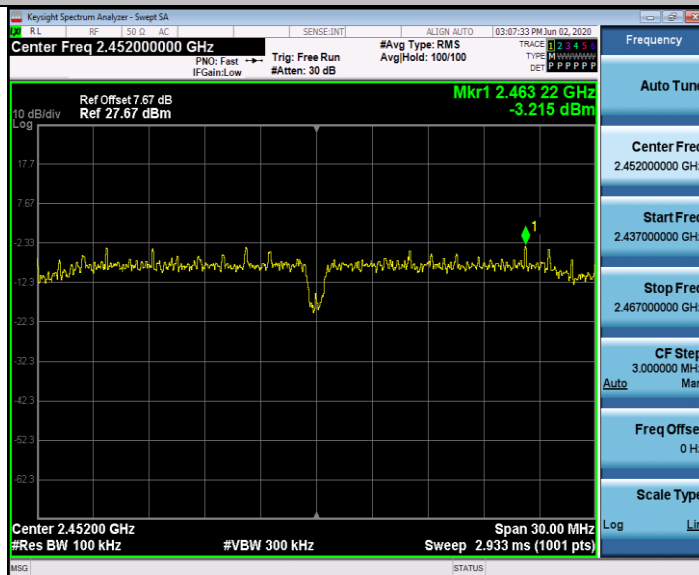

11N40SISO_Ant1_2452_30~1000



11N40SISO_Ant1_2452_1000-26500



Appendix H: Setup Photographs

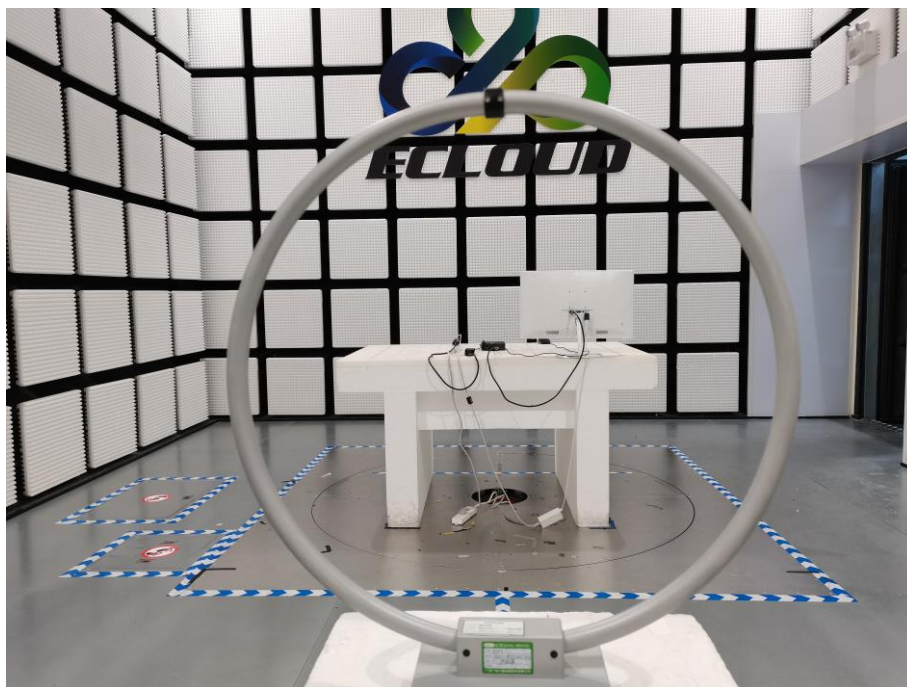


Fig. 1 Radiated emission setup photo(Below 30MHz)

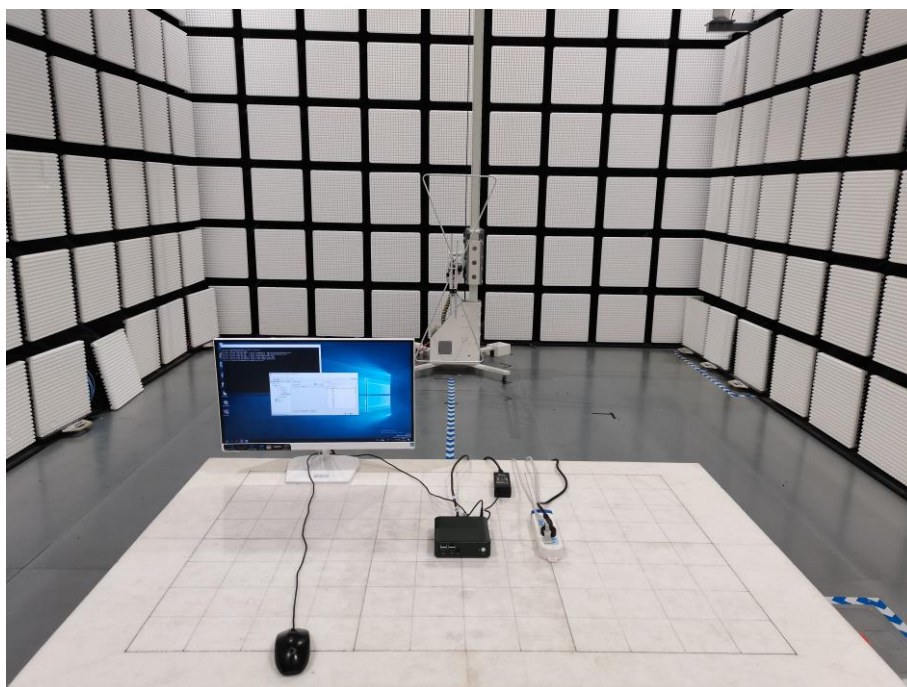


Fig. 2 Radiated emission setup photo(30MHz-1GHz)



Fig. 3 Radiated emission setup photo(Above 1GHz)



Fig. 4 Power line conducted emission setup photo

-----End of the report-----